


2012 - Mazda6 - Restraints

SAS CONTROL MODULE CONFIGURATION

1. Connect the M-MDS (IDS) to the DLC-2.

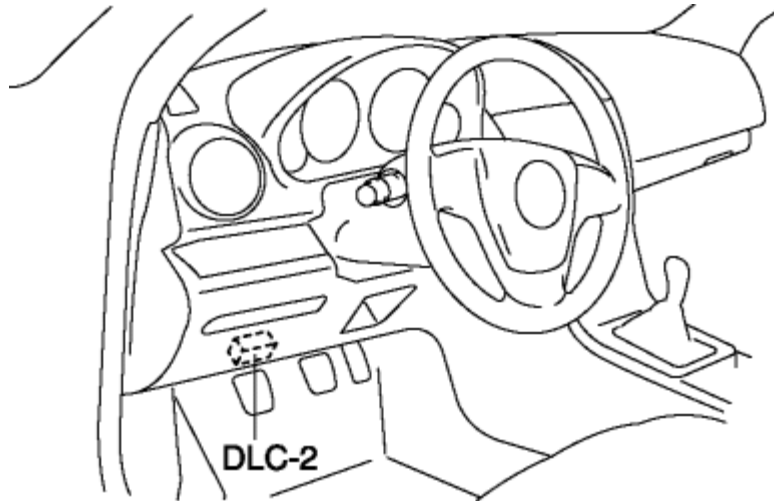


2. After the vehicle is identified, select the following items from the initialization screen of the IDS.
 - a. Select "Module Programming".
3. Then, select items from the screen menu in the following order.
 - a. Select "Programmable Module Installation".
 - b. Select "RCM".
4. Perform the configuration according to the directions on the screen.
5. Retrieve DTCs by the M-MDS, then verify that there is no DTC present.
 - If a DTC (s) is detected, perform the applicable DTC inspection. (See [DTC TABLE](#).)

2012 - Mazda6 - Restraints

SAS CONTROL MODULE CONFIGURATION

1. Connect the M-MDS (IDS) to the DLC-2.

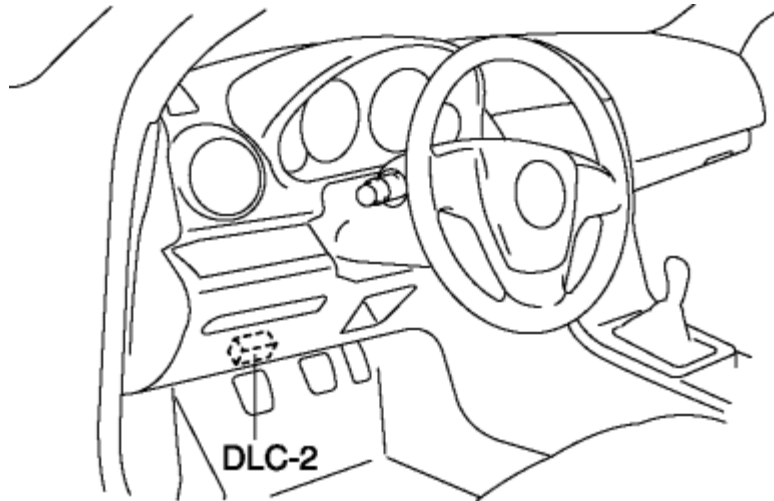

2. After the vehicle is identified, select the following items from the initialization screen of the IDS.
 - a. Select "Module Programming".
3. Then, select items from the screen menu in the following order.
 - a. Select "Programmable Module Installation".
 - b. Select "RCM".
4. Perform the configuration according to the directions on the screen.
5. Retrieve DTCs by the M-MDS, then verify that there is no DTC present.
 - If a DTC (s) is detected, perform the applicable DTC inspection. (See [DTC TABLE](#).)