

2012 - Mazda6 - Restraints

CLOCK SPRING ADJUSTMENT


NOTE:

- The adjustment procedure is also specified on the caution label of the clock spring.


1. Set the front wheels straight ahead.

CAUTION:


- The clock spring will break if over-wound. Do not forcibly turn the clock spring.
2. Turn the clock spring clockwise until it stops.

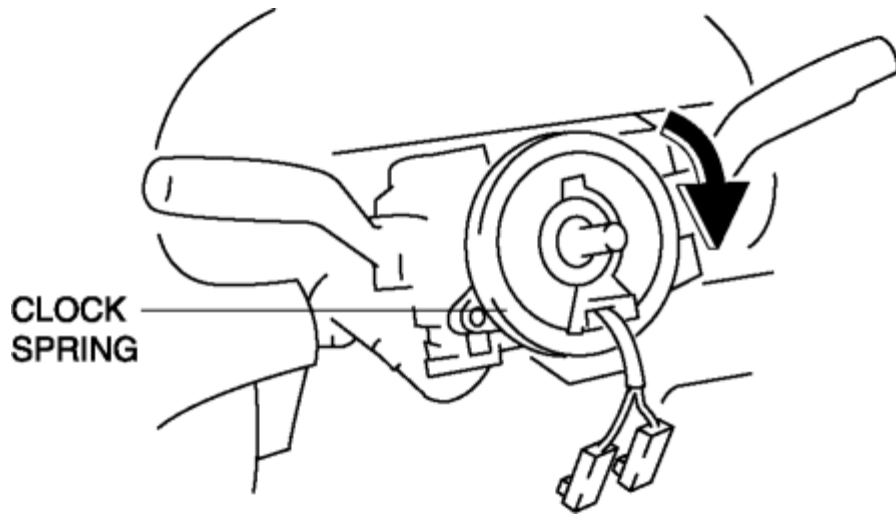

3. Turn the clock spring counterclockwise **2 3/4 turns**.

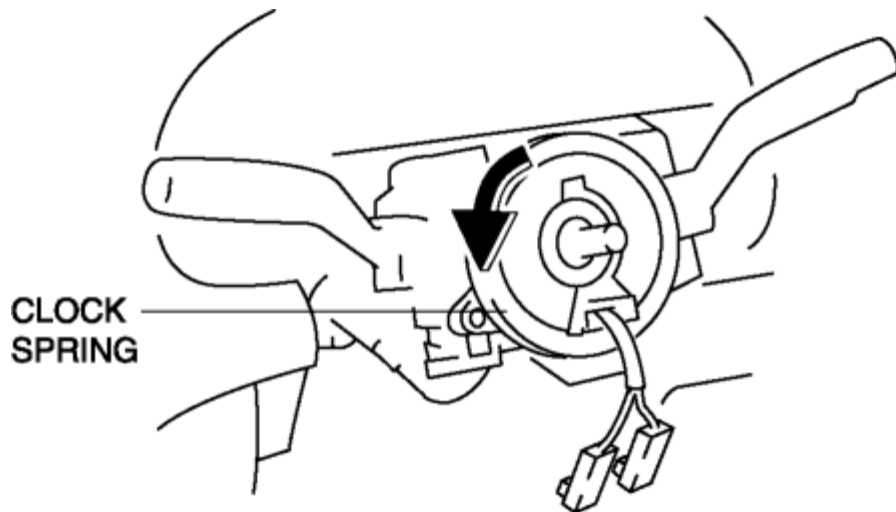

4. Align the mark on the clock spring with the mark on the outer housing.

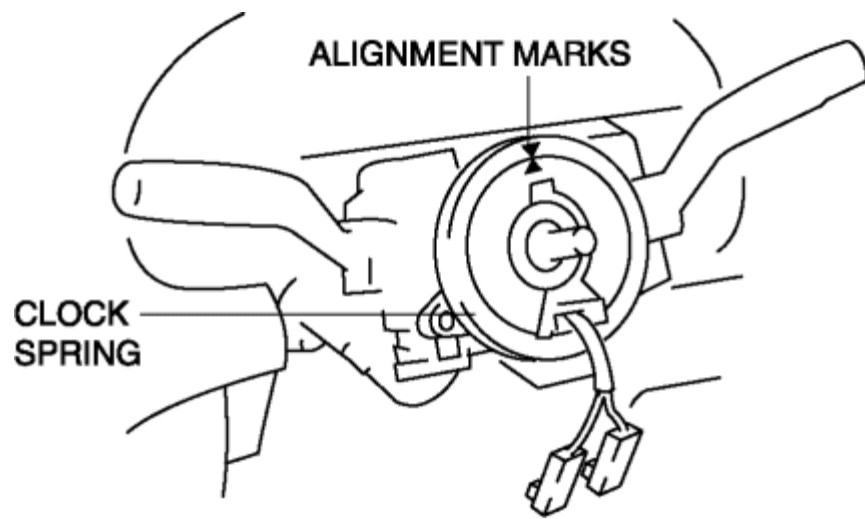

[< Previous](#) [Next >](#)

[Back to Top](#)

© 2011 Mazda North American Operations, U.S.A.

2012 - Mazda6 - Restraints

CLOCK SPRING ADJUSTMENT


NOTE:

- The adjustment procedure is also specified on the caution label of the clock spring.


1. Set the front wheels straight ahead.

CAUTION:


- The clock spring will break if over-wound. Do not forcibly turn the clock spring.
2. Turn the clock spring clockwise until it stops.

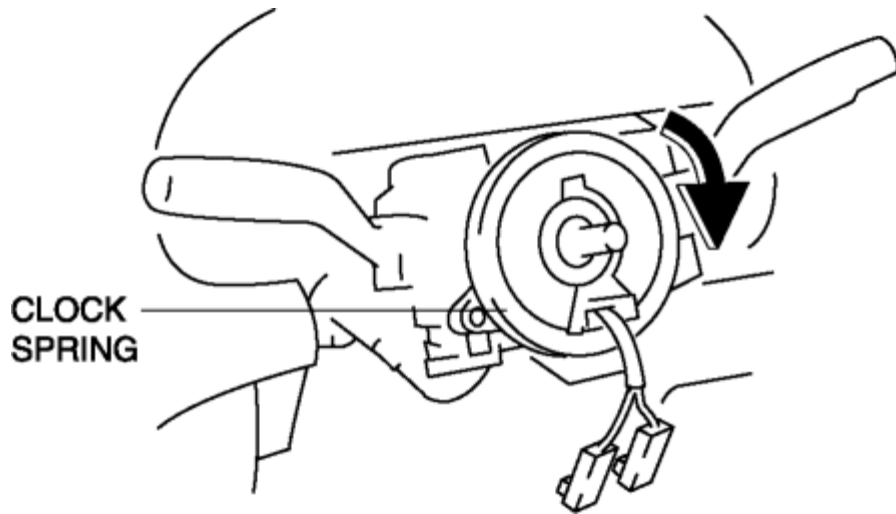

3. Turn the clock spring counterclockwise **2 3/4 turns**.

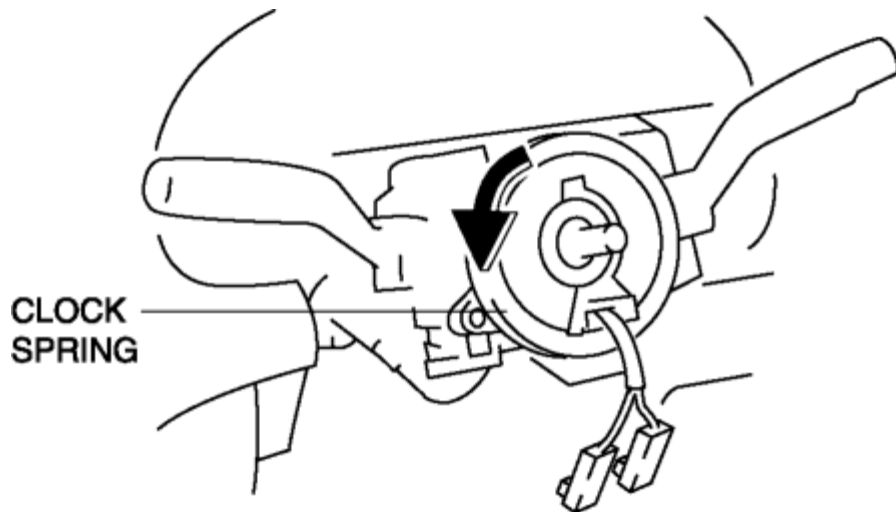

4. Align the mark on the clock spring with the mark on the outer housing.

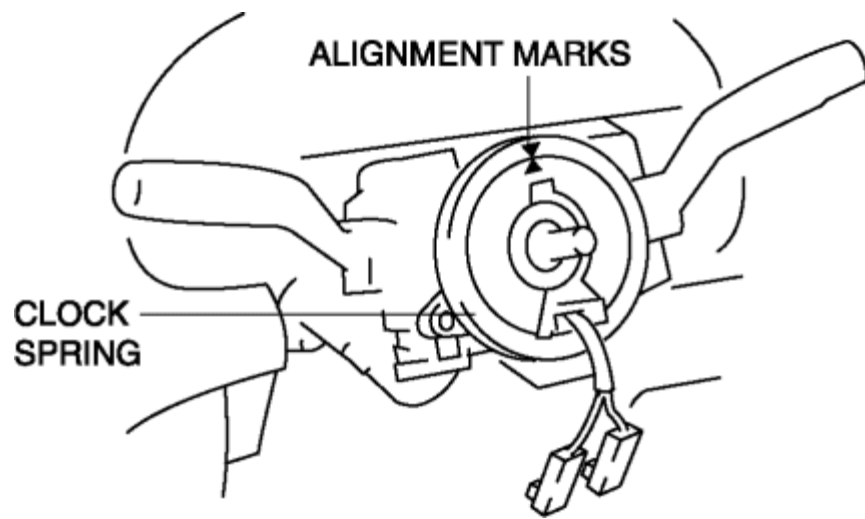

[< Previous](#) [Next >](#)

[Back to Top](#)

© 2011 Mazda North American Operations, U.S.A.