


2012 - Mazda6 - Body and Accessories


HOOD REMOVAL/ INSTALLATION

WARNING:

- Removing the hood without supporting it could cause the hood to fall and cause serious injury. Always perform the procedure with at least another person to prevent the hood from falling.
1. After loosening bolt A and removing bolt B, remove the hood in the direction of the arrow shown in the figure.

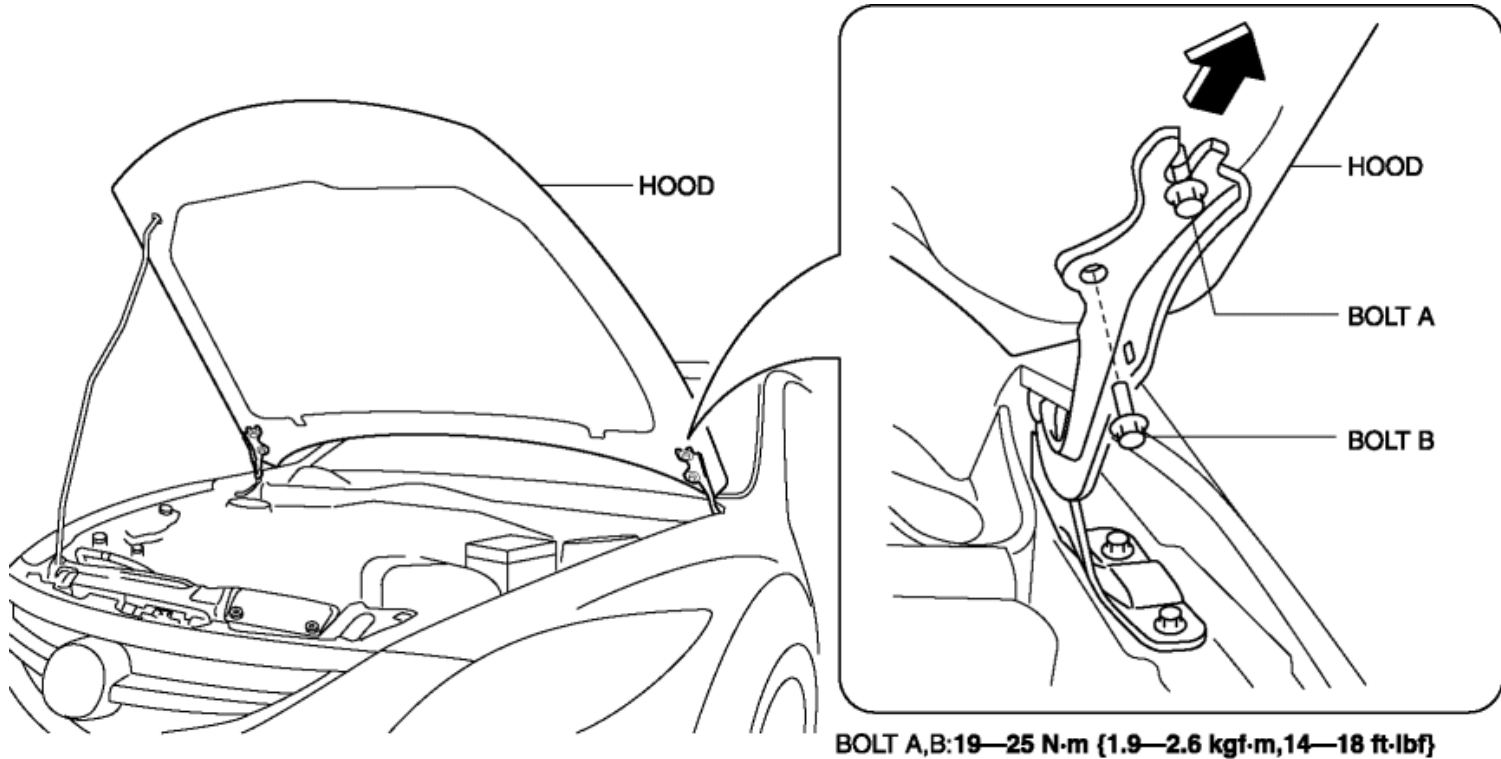

2. Remove bolt C, and remove the hood hinge in the direction of the arrow shown in the figure.

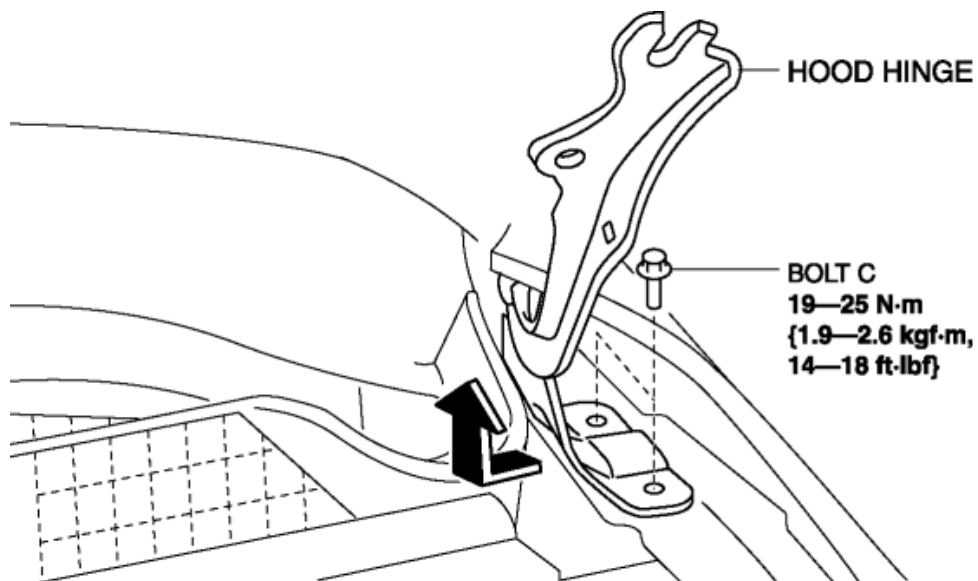

3. Install in the reverse order of removal.

4. When installing the hood, adjust the hood by moving the hood hinge. (See [HOOD ADJUSTMENT](#))

[< Previous](#) [Next >](#)

© 2012 Mazda North American Operations, U.S.A.


[Back to Top](#)

2012 - Mazda6 - Body and Accessories


HOOD REMOVAL/ INSTALLATION

WARNING:

- Removing the hood without supporting it could cause the hood to fall and cause serious injury. Always perform the procedure with at least another person to prevent the hood from falling.
1. After loosening bolt A and removing bolt B, remove the hood in the direction of the arrow shown in the figure.

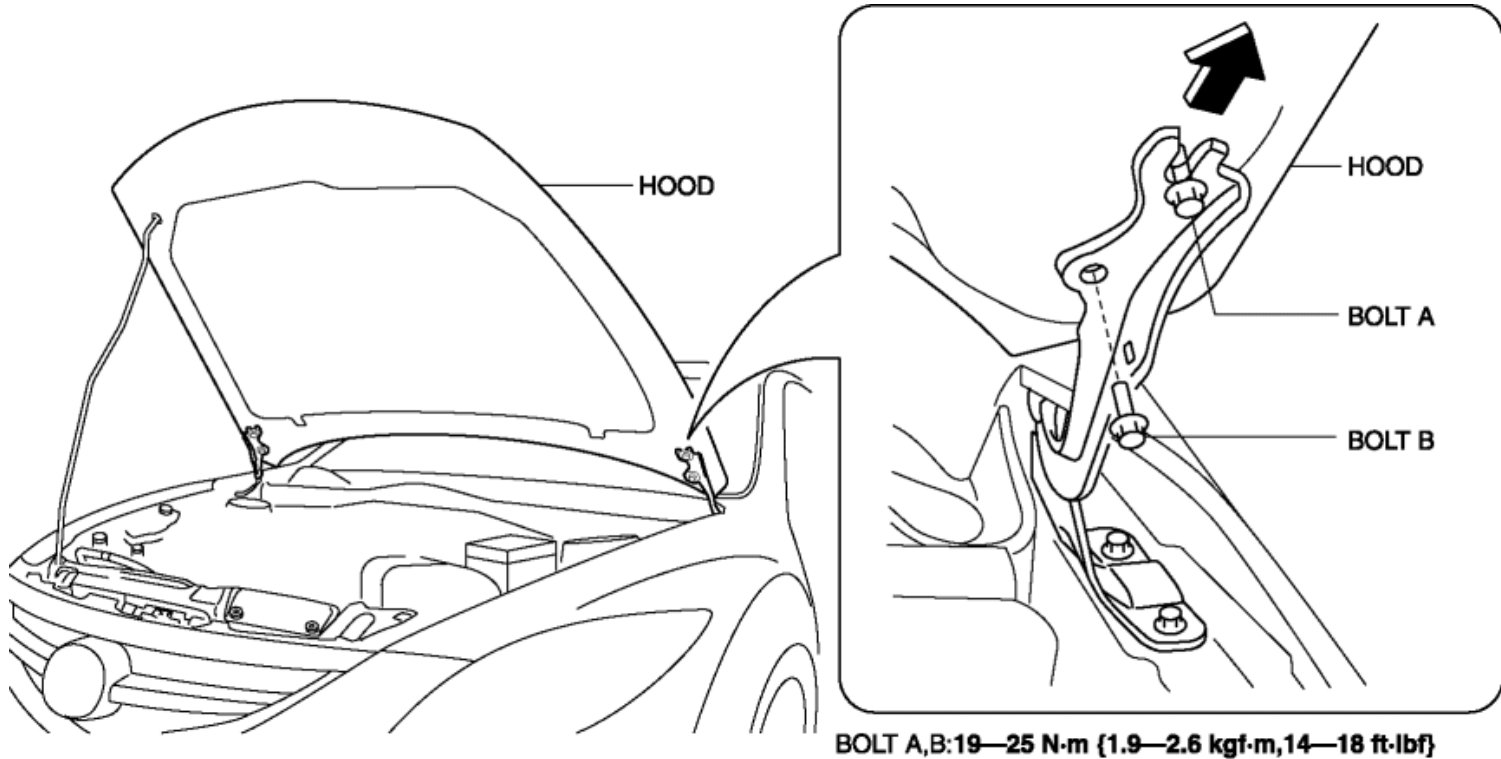

2. Remove bolt C, and remove the hood hinge in the direction of the arrow shown in the figure.

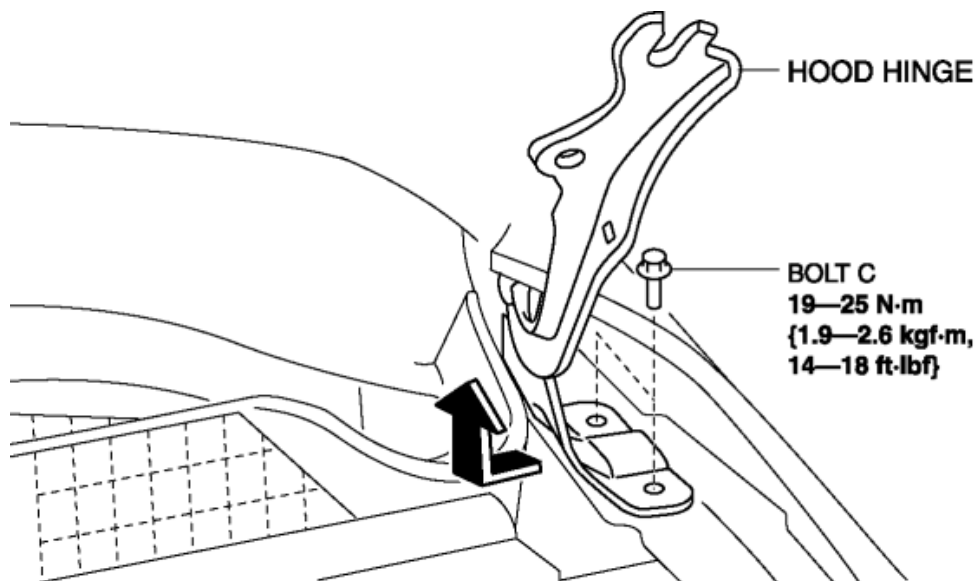

3. Install in the reverse order of removal.

4. When installing the hood, adjust the hood by moving the hood hinge. (See [HOOD ADJUSTMENT](#))

[< Previous](#) [Next >](#)

© 2012 Mazda North American Operations, U.S.A.

[Back to Top](#)