


2012 - Mazda6 - Body and Accessories

REAR DOOR REMOVAL/ INSTALLATION

WARNING:

- Removing the rear door without supporting it could cause the rear door to fall and cause serious injury. Always perform the procedure with at least another person to prevent the rear door from falling.

1. Disconnect the negative battery cable.
2. Remove in the order indicated in the table.

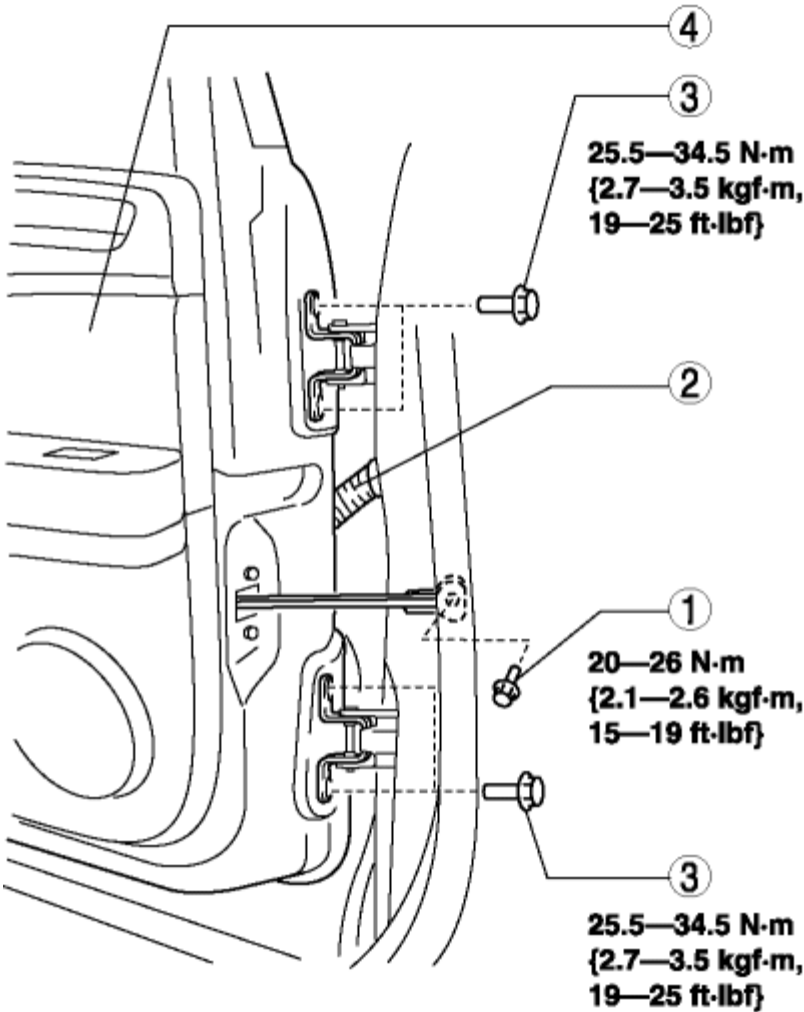

1 Bolt A
2 Connector

(See [Connector Removal Note](#).)

3 Bolt B


4 Rear door

3. Install in the reverse order of removal.

4. Adjust the rear door. (See [DOOR ADJUSTMENT](#).)

Connector Removal Note

1. While pressing the tab in the direction of arrow (1), disconnect the connector in the direction of arrow (2).

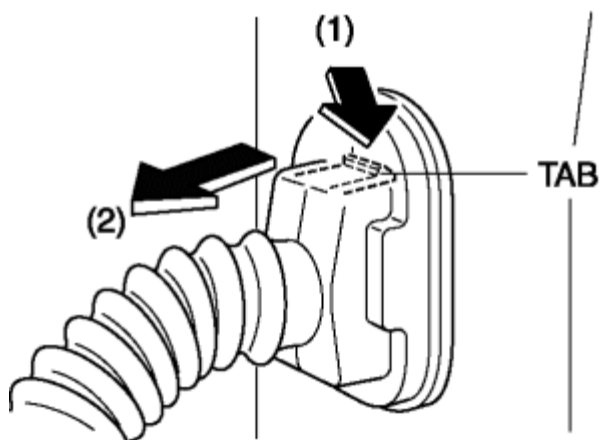

[< Previous](#) [Next >](#)

[Back to Top](#)


2012 - Mazda6 - Body and Accessories

REAR DOOR REMOVAL/ INSTALLATION

WARNING:

- Removing the rear door without supporting it could cause the rear door to fall and cause serious injury. Always perform the procedure with at least another person to prevent the rear door from falling.

1. Disconnect the negative battery cable.
2. Remove in the order indicated in the table.

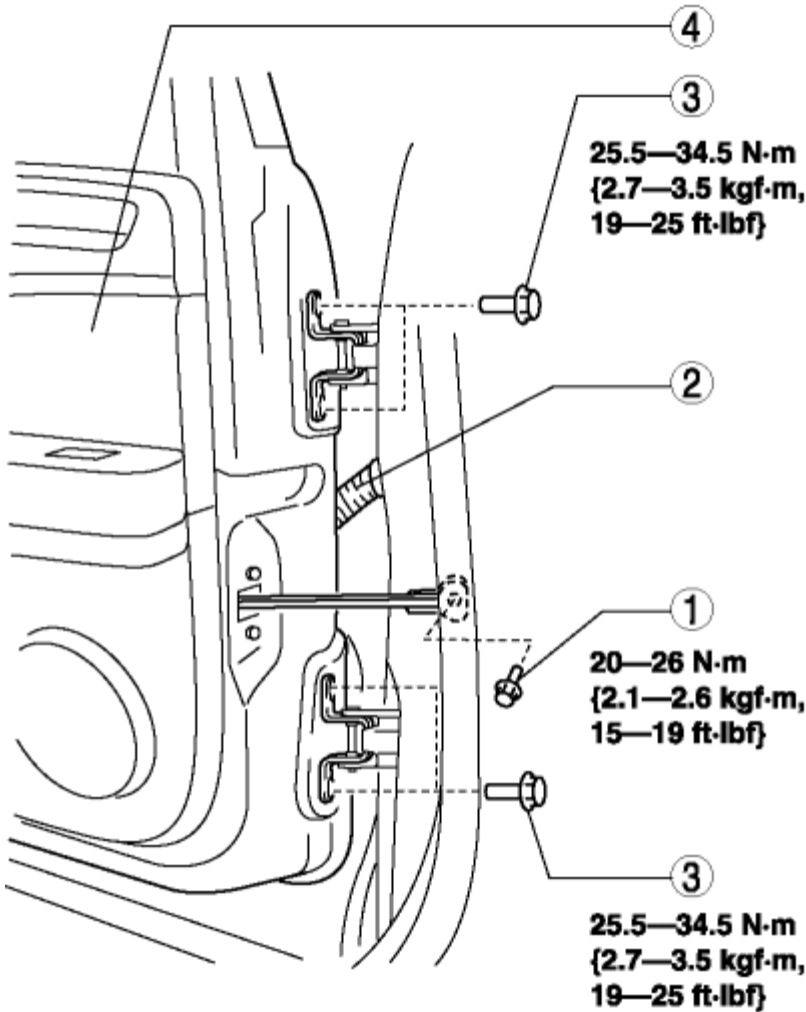

1 Bolt A
2 Connector

(See [Connector Removal Note.](#))

3 Bolt B


4 Rear door

3. Install in the reverse order of removal.

4. Adjust the rear door. (See [DOOR ADJUSTMENT.](#))

Connector Removal Note

1. While pressing the tab in the direction of arrow (1), disconnect the connector in the direction of arrow (2).

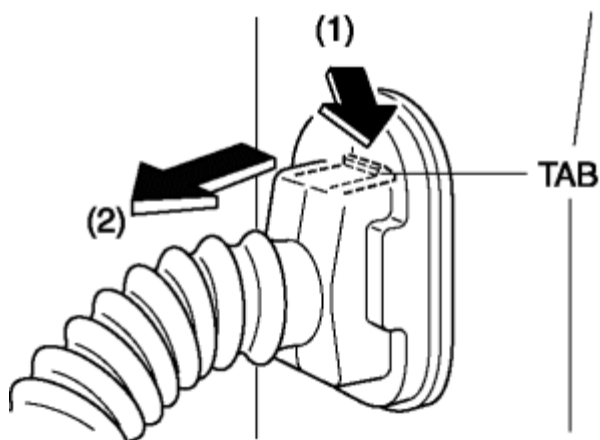

[< Previous](#) [Next >](#)

[Back to Top](#)