



2012 - Mazda6 - Body and Accessories

REAR DOOR CHECKER REMOVAL/ INSTALLATION

1. Fully close the rear door glass.
2. Disconnect the negative battery cable.
3. Remove the rear door trim. (See [REAR DOOR TRIM REMOVAL/ INSTALLATION](#).)
4. Remove the rear door speaker. (See [REAR DOOR SPEAKER REMOVAL/ INSTALLATION](#).)
5. Remove the bolt.

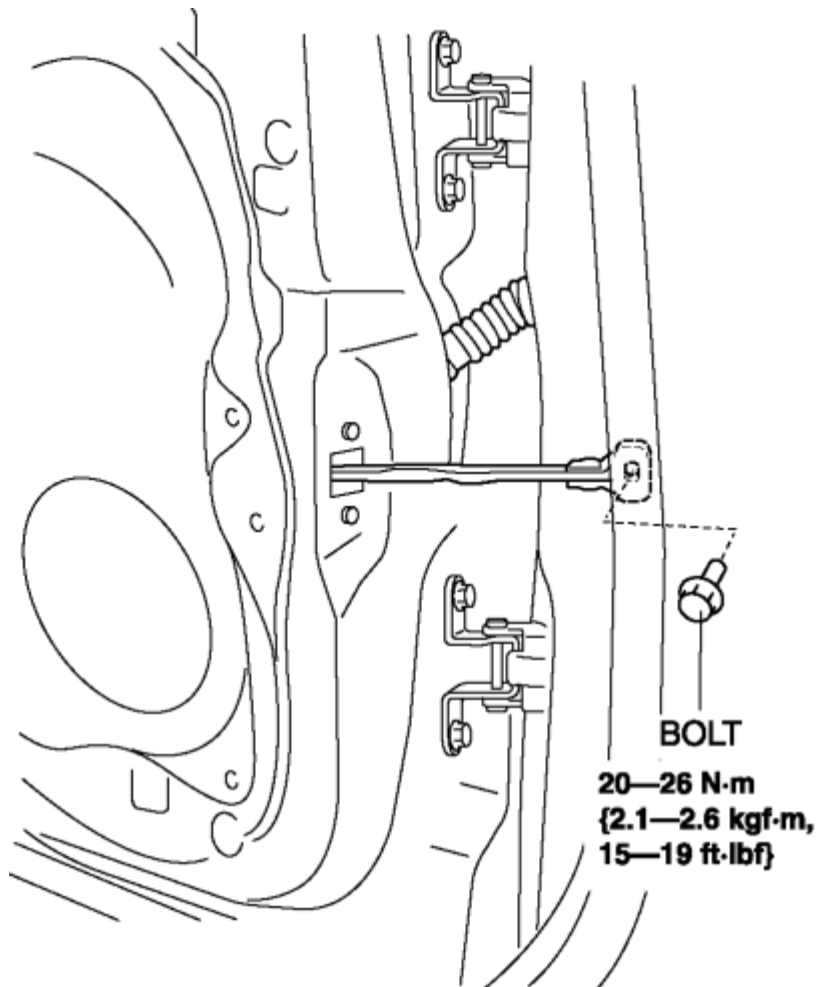

6. Remove the nuts.

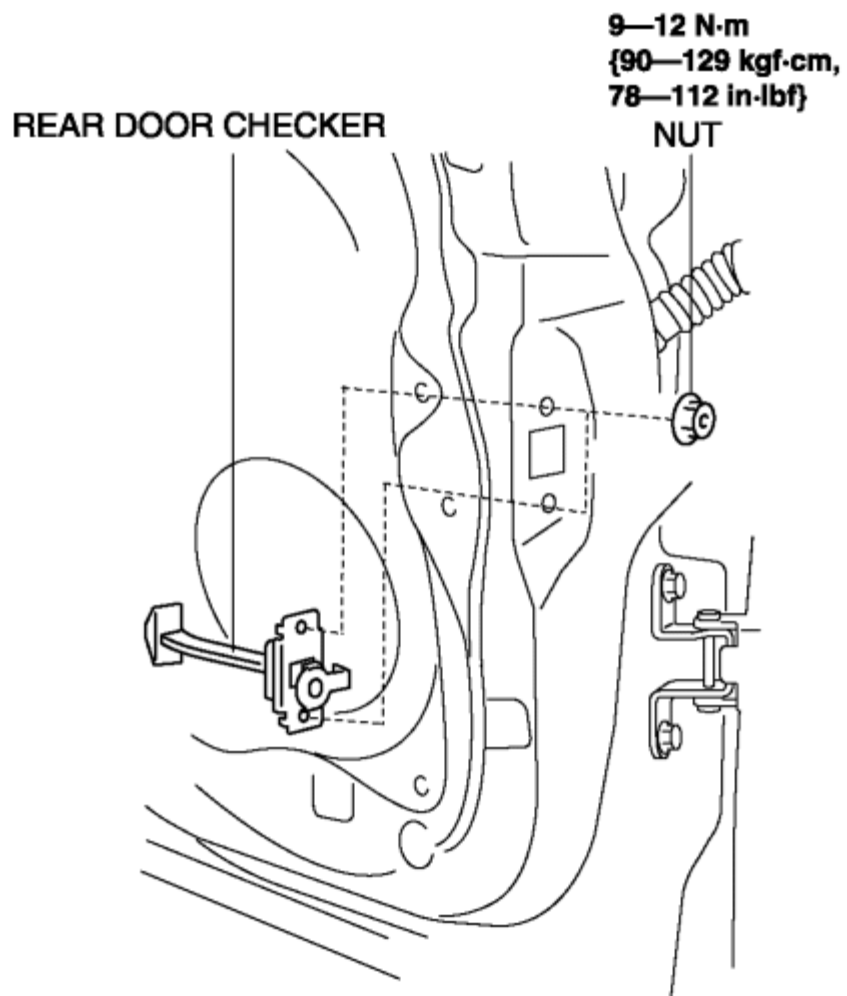

7. Pull out the rear door checker from the rear speaker installation hole.
8. Install in the reverse order of removal.


[< Previous](#) [Next >](#)

[Back to Top](#)


2012 - Mazda6 - Body and Accessories

REAR DOOR CHECKER REMOVAL/ INSTALLATION

1. Fully close the rear door glass.
2. Disconnect the negative battery cable.
3. Remove the rear door trim. (See [REAR DOOR TRIM REMOVAL/ INSTALLATION](#).)
4. Remove the rear door speaker. (See [REAR DOOR SPEAKER REMOVAL/ INSTALLATION](#).)
5. Remove the bolt.

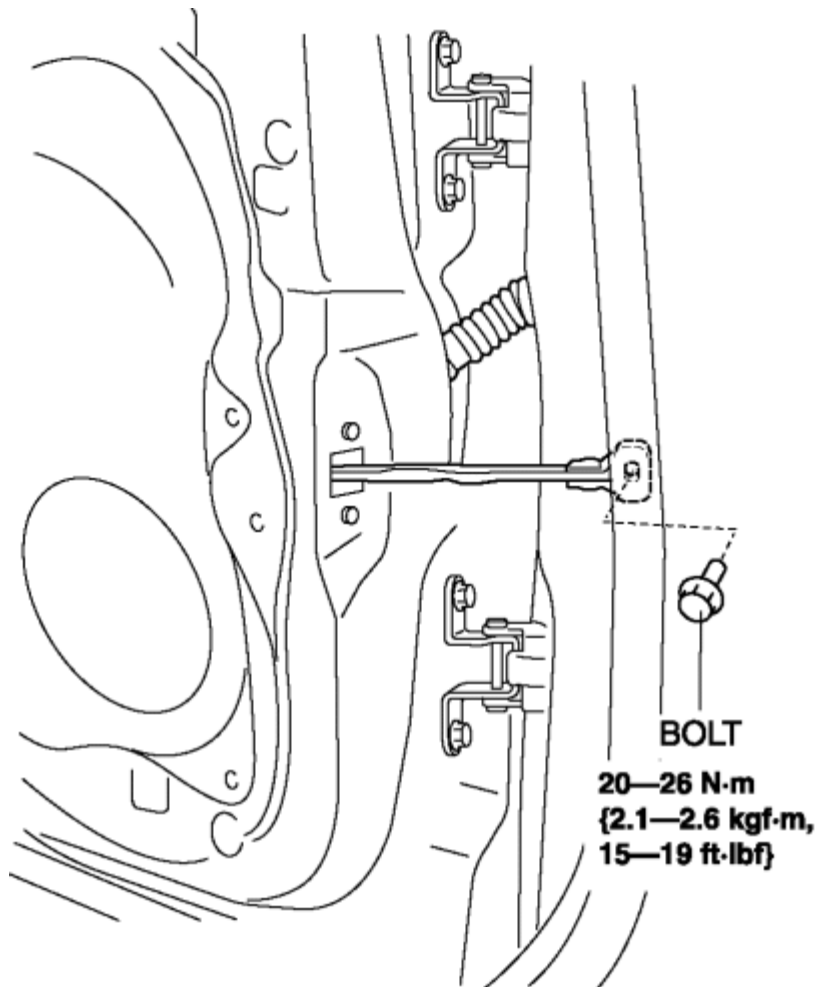

6. Remove the nuts.

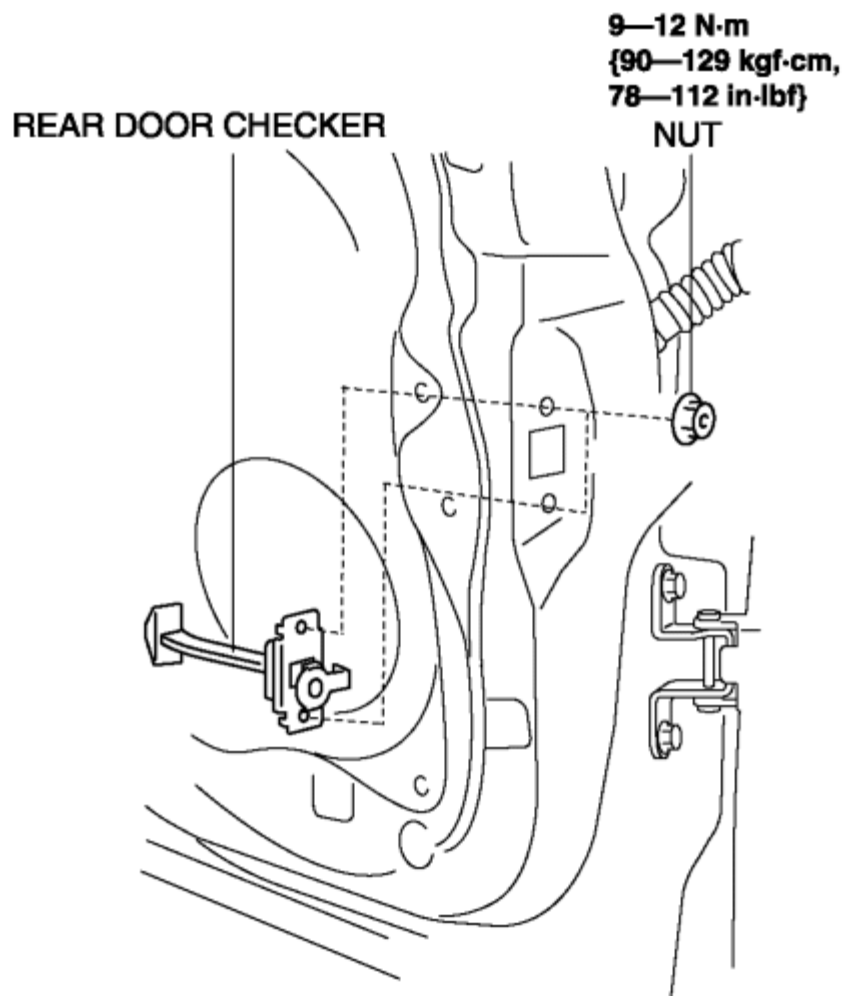

7. Pull out the rear door checker from the rear speaker installation hole.
8. Install in the reverse order of removal.

[< Previous](#) [Next >](#)

[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.