


2012 - Mazda6 - Body and Accessories

GLASS PANEL ADJUSTMENT


1. Fully close the glass panel.
2. Measure the gap and height between the glass panel and body.
3. If not as specified, loosen the glass panel installation screws and reposition the glass panel.

Clearance

- a: 0.3—2.3 mm {0.02—0.09 in}
- b: 0 mm {0 in}

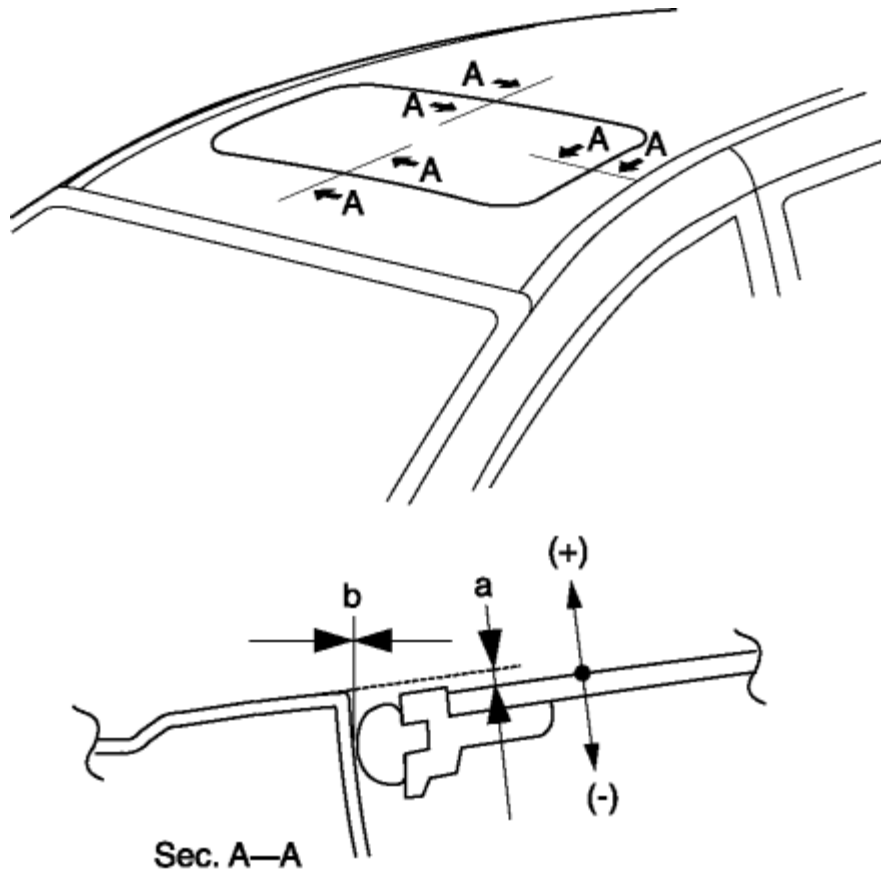

4. Tighten the installation screws.
 5. Insert a plastic card between the weatherstrip and the body of the vehicle. Verify that the sunroof is shut tightly (there is resistance when the plastic card is moved).
- If the sunroof is not shut tightly, readjust by performing Steps 3 and 4.

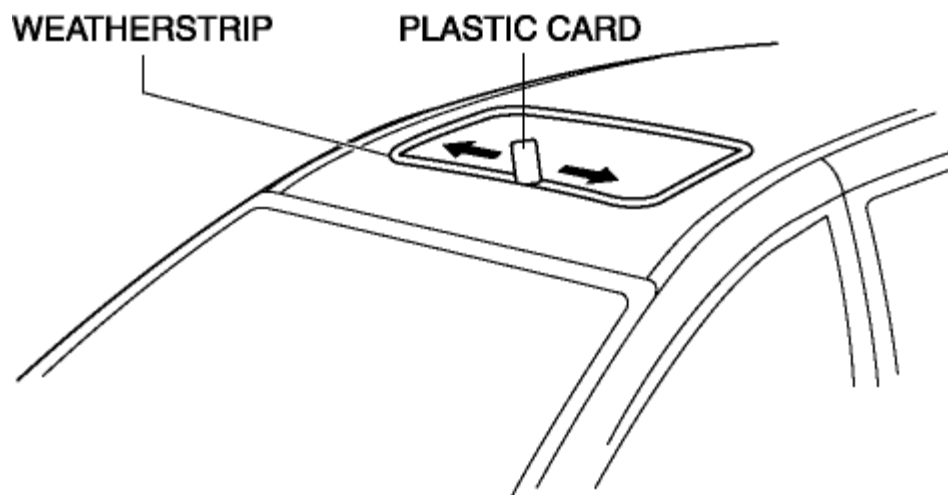

[< Previous](#) [Next >](#)

[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.


2012 - Mazda6 - Body and Accessories

GLASS PANEL ADJUSTMENT


1. Fully close the glass panel.
2. Measure the gap and height between the glass panel and body.
3. If not as specified, loosen the glass panel installation screws and reposition the glass panel.

Clearance

- a: 0.3—2.3 mm {0.02—0.09 in}
- b: 0 mm {0 in}

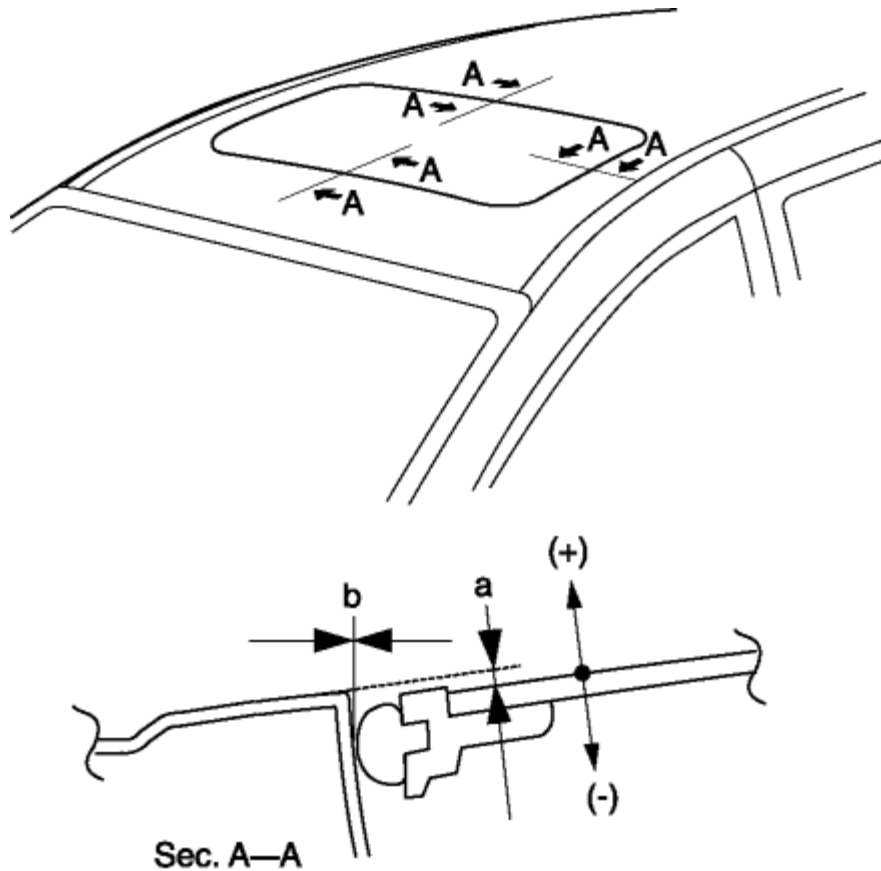

4. Tighten the installation screws.
 5. Insert a plastic card between the weatherstrip and the body of the vehicle. Verify that the sunroof is shut tightly (there is resistance when the plastic card is moved).
- If the sunroof is not shut tightly, readjust by performing Steps 3 and 4.

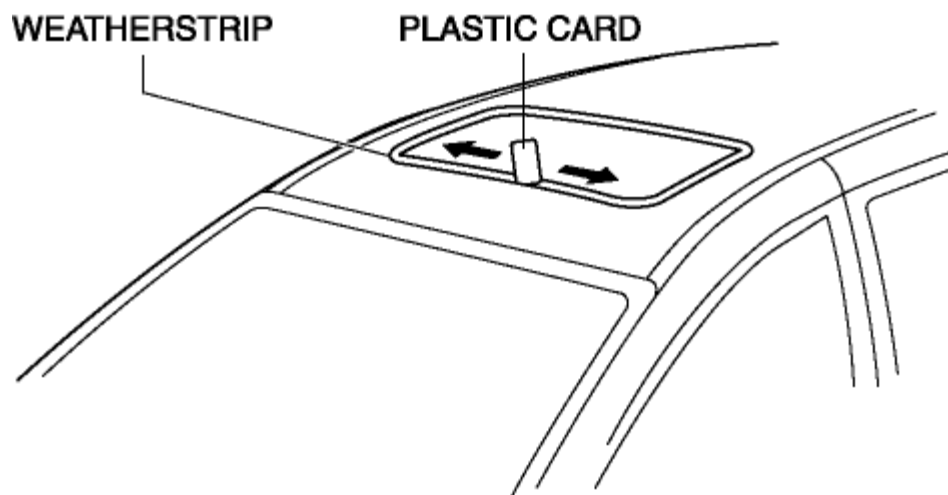

[< Previous](#) [Next >](#)

[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.