


2012 - Mazda6 - Body and Accessories

REAR BELTLINE MOLDING REMOVAL/ INSTALLATION

1. Fully lower the rear door glass.
2. Remove the rear door trim. (See [REAR DOOR TRIM REMOVAL/ INSTALLATION](#).)
3. Remove clip C using a fastener remover and pull up the rear beltline molding in the direction of the arrow (1) shown in the figure.

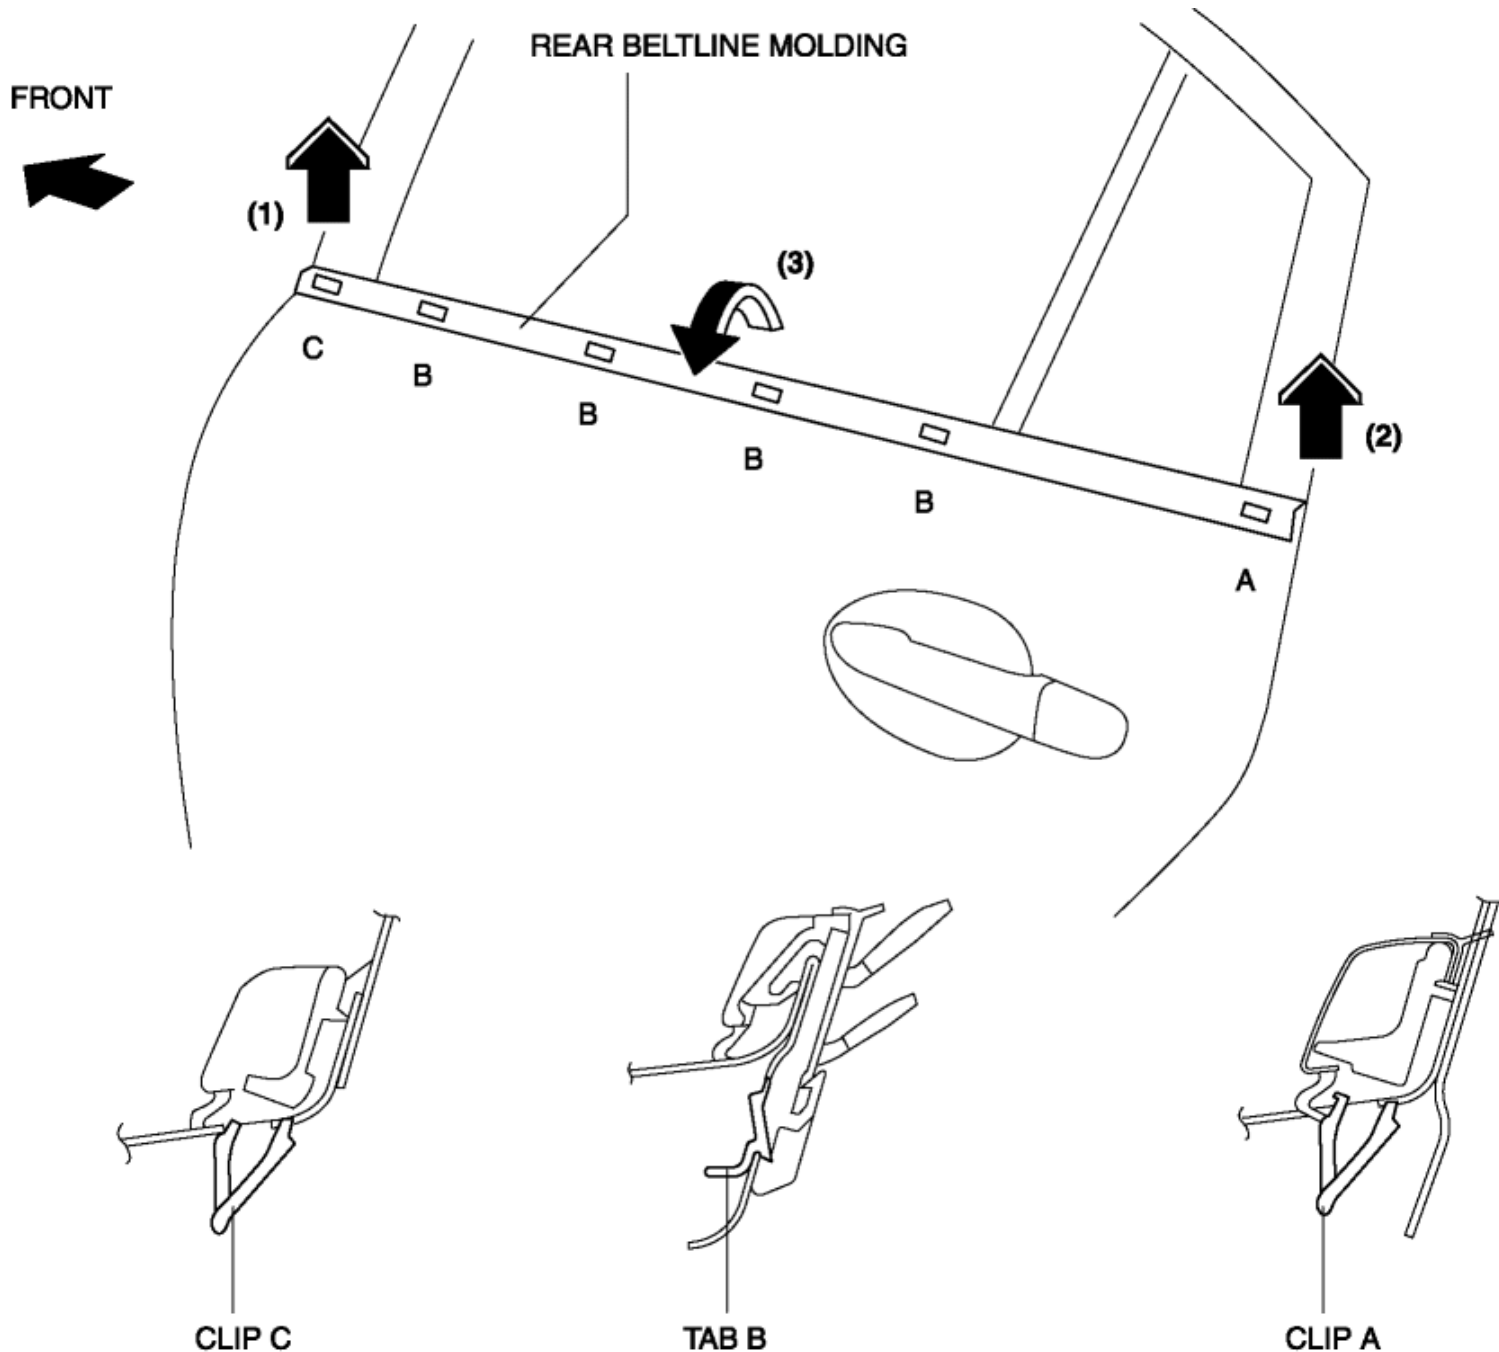

4. Remove clip A using a fastener remover and pull up the rear beltline molding in the direction of the arrow (2) shown in the figure.

5. Rotate the rear beltline molding in the direction of the arrow (3) shown in the figure and remove it while detaching tabs B.

6. Install in the reverse order of removal.

[< Previous](#) [Next >](#)


[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.

2012 - Mazda6 - Body and Accessories

REAR BELTLINE MOLDING REMOVAL/ INSTALLATION

1. Fully lower the rear door glass.
2. Remove the rear door trim. (See [REAR DOOR TRIM REMOVAL/ INSTALLATION](#).)
3. Remove clip C using a fastener remover and pull up the rear beltline molding in the direction of the arrow (1) shown in the figure.

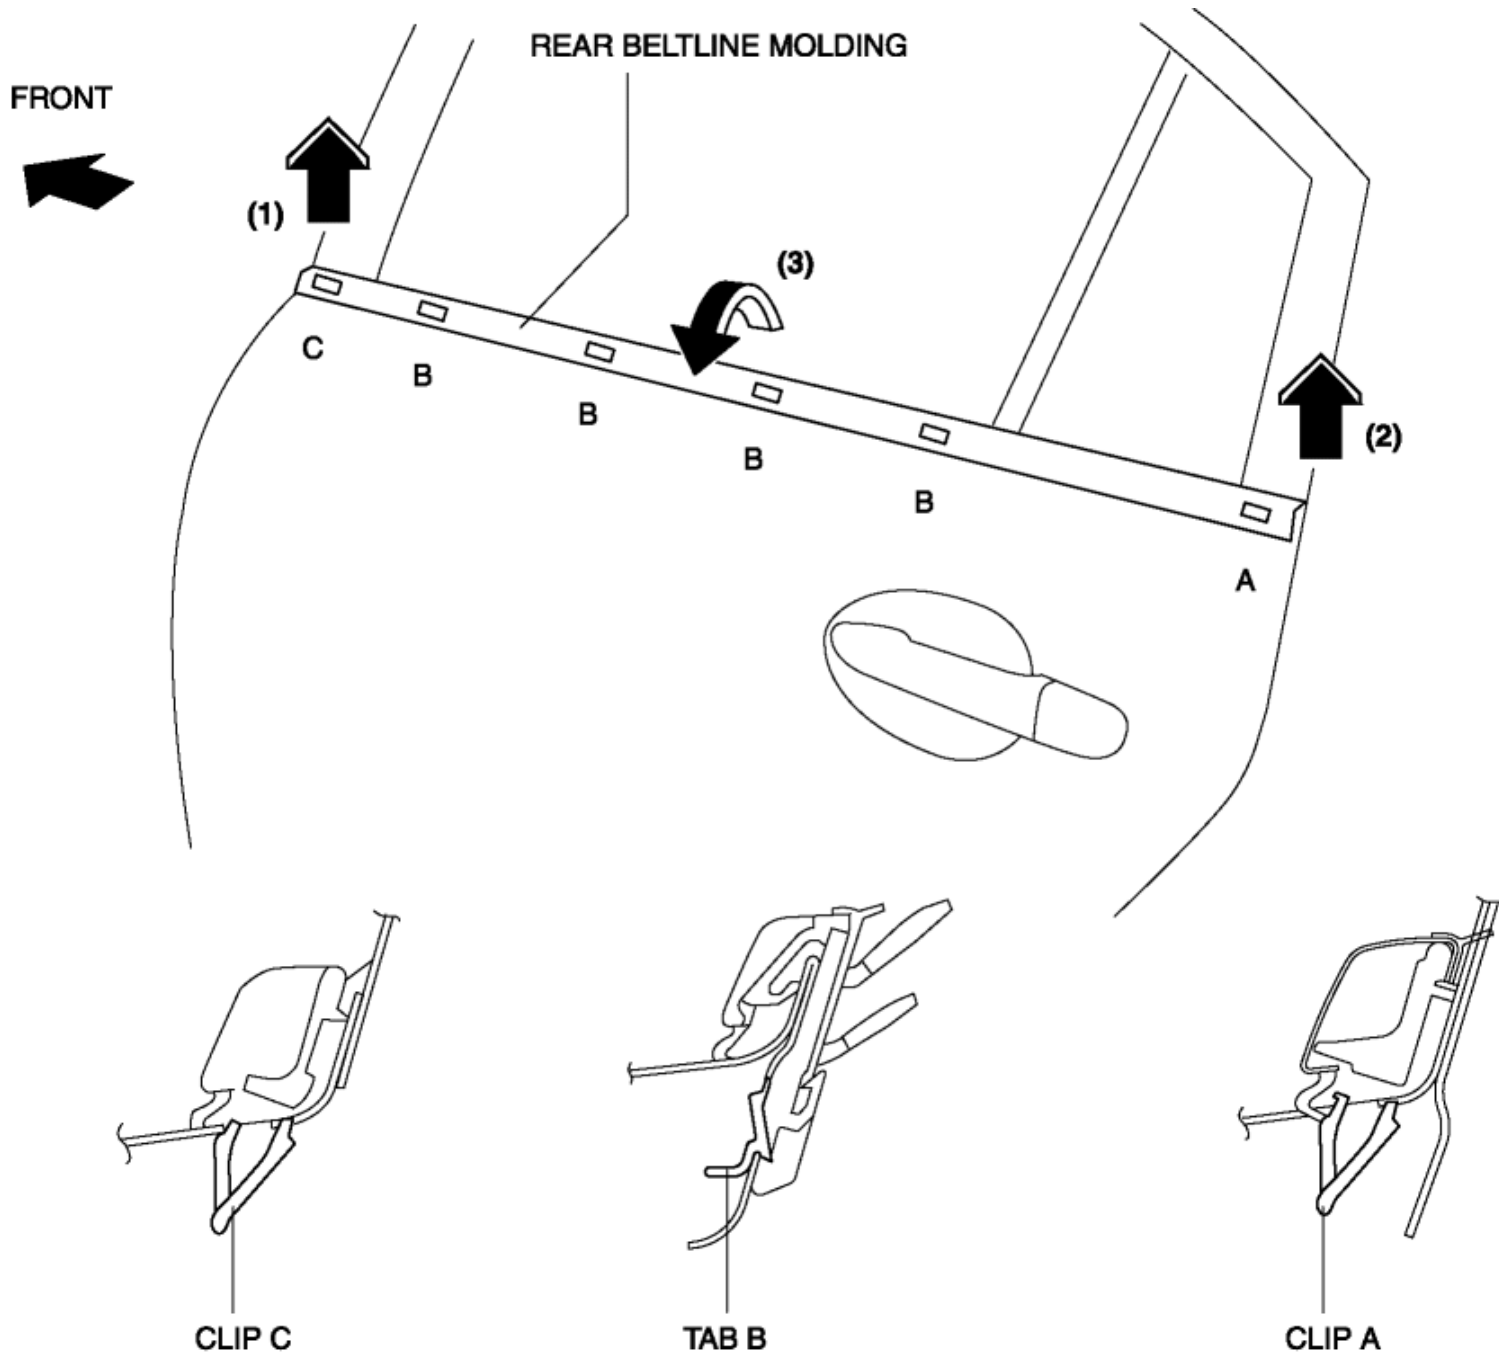

4. Remove clip A using a fastener remover and pull up the rear beltline molding in the direction of the arrow (2) shown in the figure.

5. Rotate the rear beltline molding in the direction of the arrow (3) shown in the figure and remove it while detaching tabs B.

6. Install in the reverse order of removal.

[< Previous](#) [Next >](#)

[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.