


2012 - Mazda6 - Body and Accessories

FRONT SASH MOLDING REMOVAL

1. Remove the inner garnish. (See [INNER GARNISH REMOVAL/ INSTALLATION](#))
2. Remove the front door trim. (See [FRONT DOOR TRIM REMOVAL/ INSTALLATION](#))
3. Remove the power outer mirror. (See [POWER OUTER MIRROR REMOVAL/ INSTALLATION](#))
4. Press tab A in the direction of the arrow and remove it.

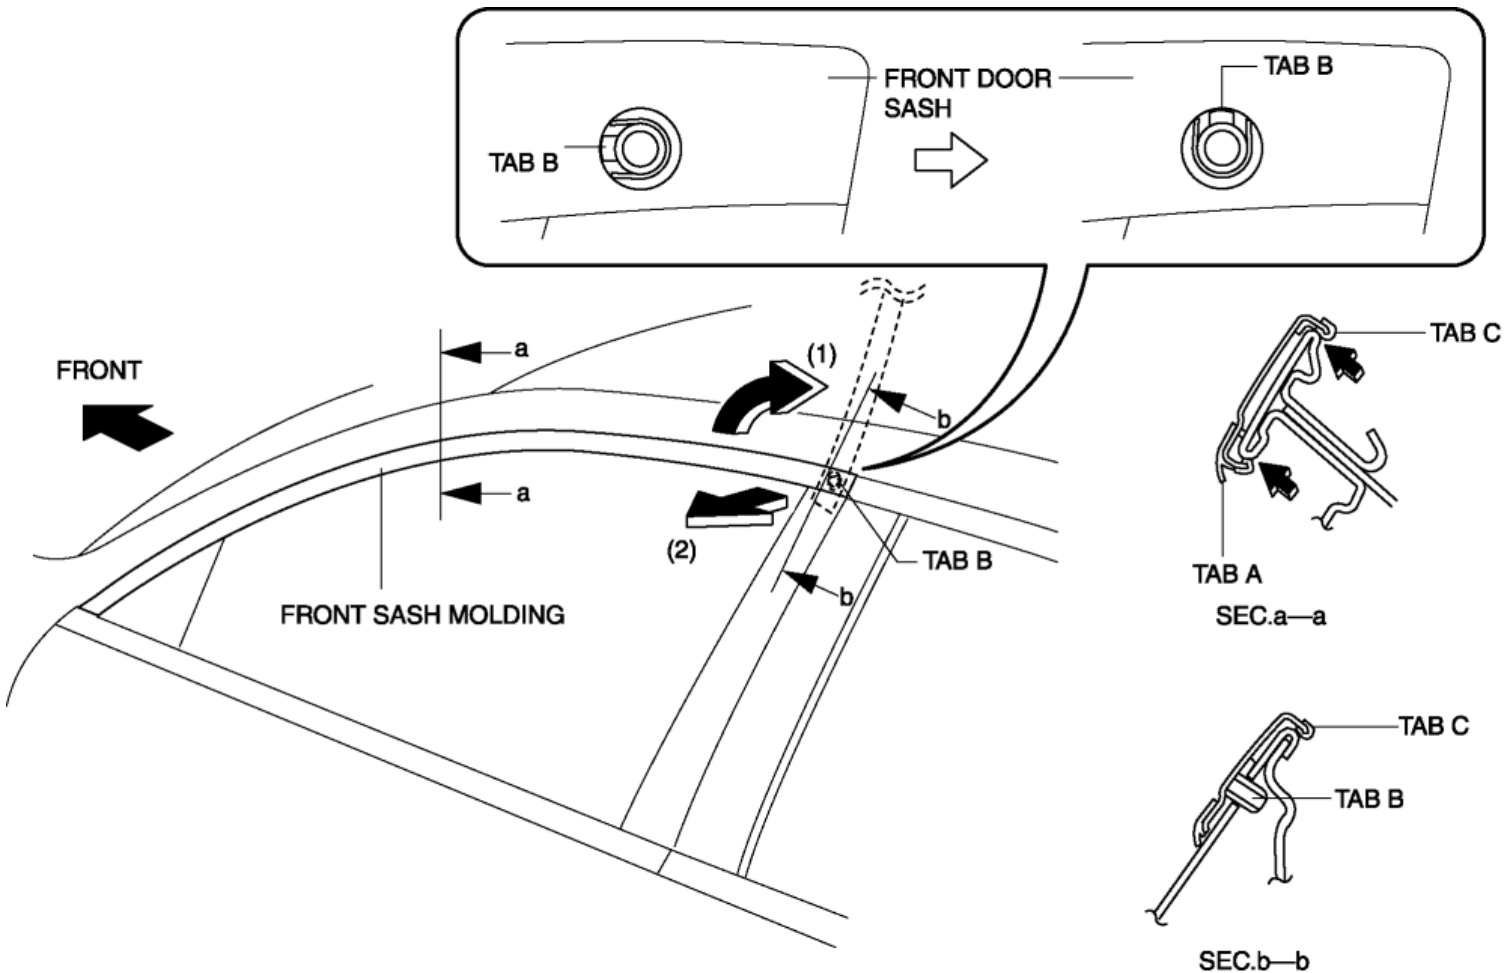


5. Press tab C in the direction of the arrow and remove it.
6. Rotate the front sash molding 90° in the direction of arrow (1) shown in the figure, disconnect the tab B, and pull out the front sash molding in the direction of the arrow (2).
7. Remove the front sash molding.

2012 - Mazda6 - Body and Accessories

FRONT SASH MOLDING REMOVAL

1. Remove the inner garnish. (See [INNER GARNISH REMOVAL/ INSTALLATION](#))
2. Remove the front door trim. (See [FRONT DOOR TRIM REMOVAL/ INSTALLATION](#))
3. Remove the power outer mirror. (See [POWER OUTER MIRROR REMOVAL/ INSTALLATION](#))
4. Press tab A in the direction of the arrow and remove it.

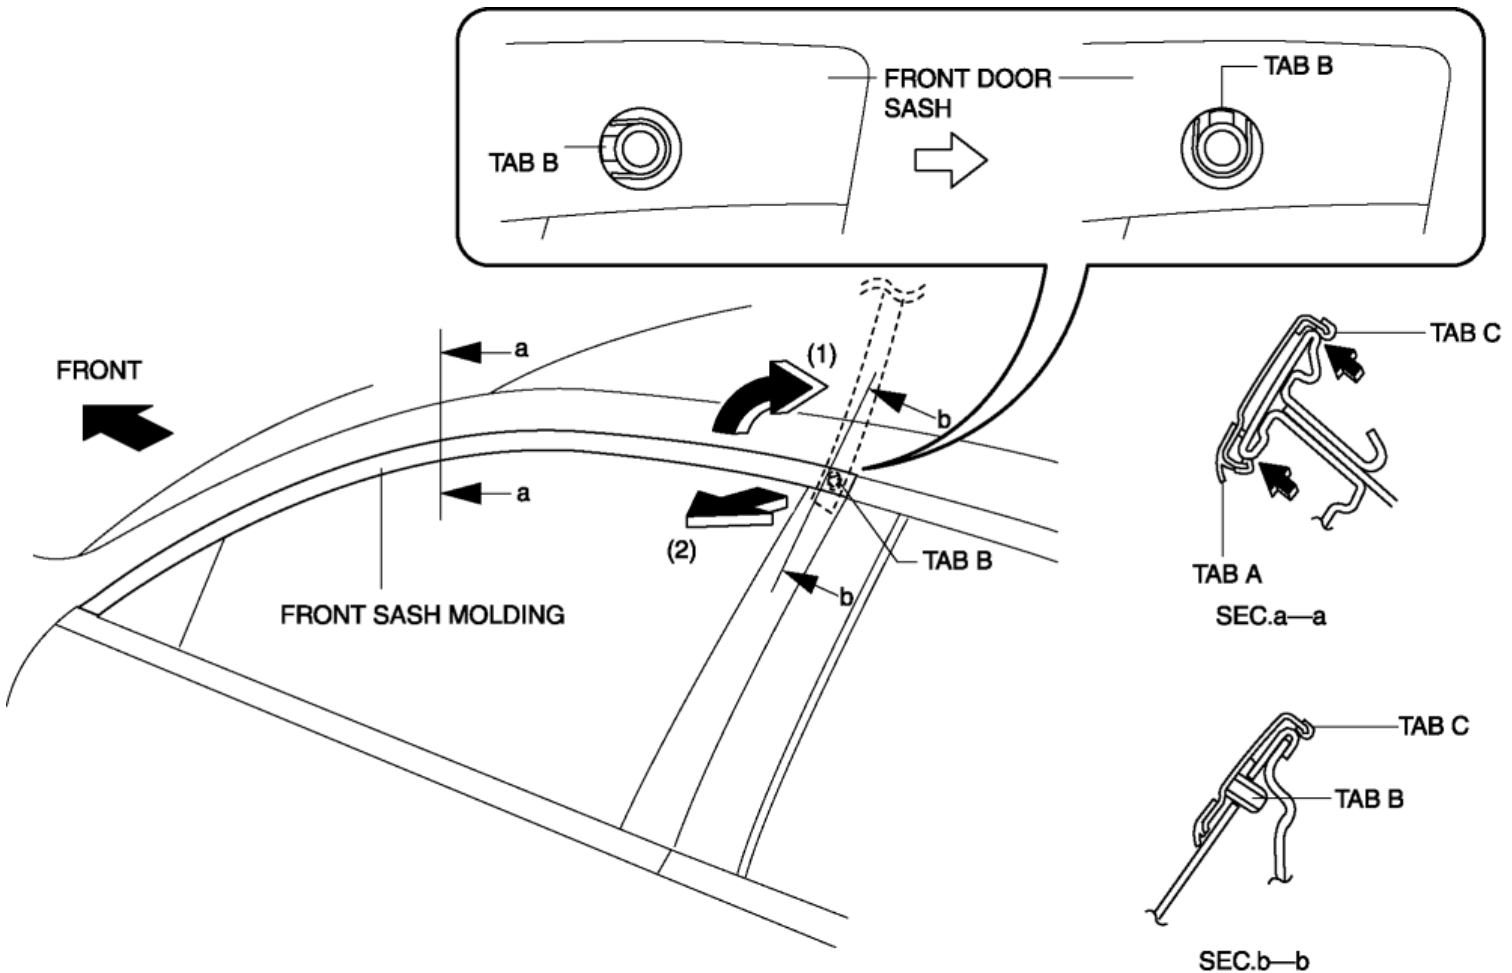

5. Press tab C in the direction of the arrow and remove it.
6. Rotate the front sash molding 90° in the direction of arrow (1) shown in the figure, disconnect the tab B, and pull out the front sash molding in the direction of the arrow (2).
7. Remove the front sash molding.