


2012 - Mazda6 - Body and Accessories

REAR SASH MOLDING REMOVAL

WARNING:

- Using a razor with bare hands can cause injury. Always wear gloves when using a razor.

1. Press tab C in the direction of the arrow and remove it.

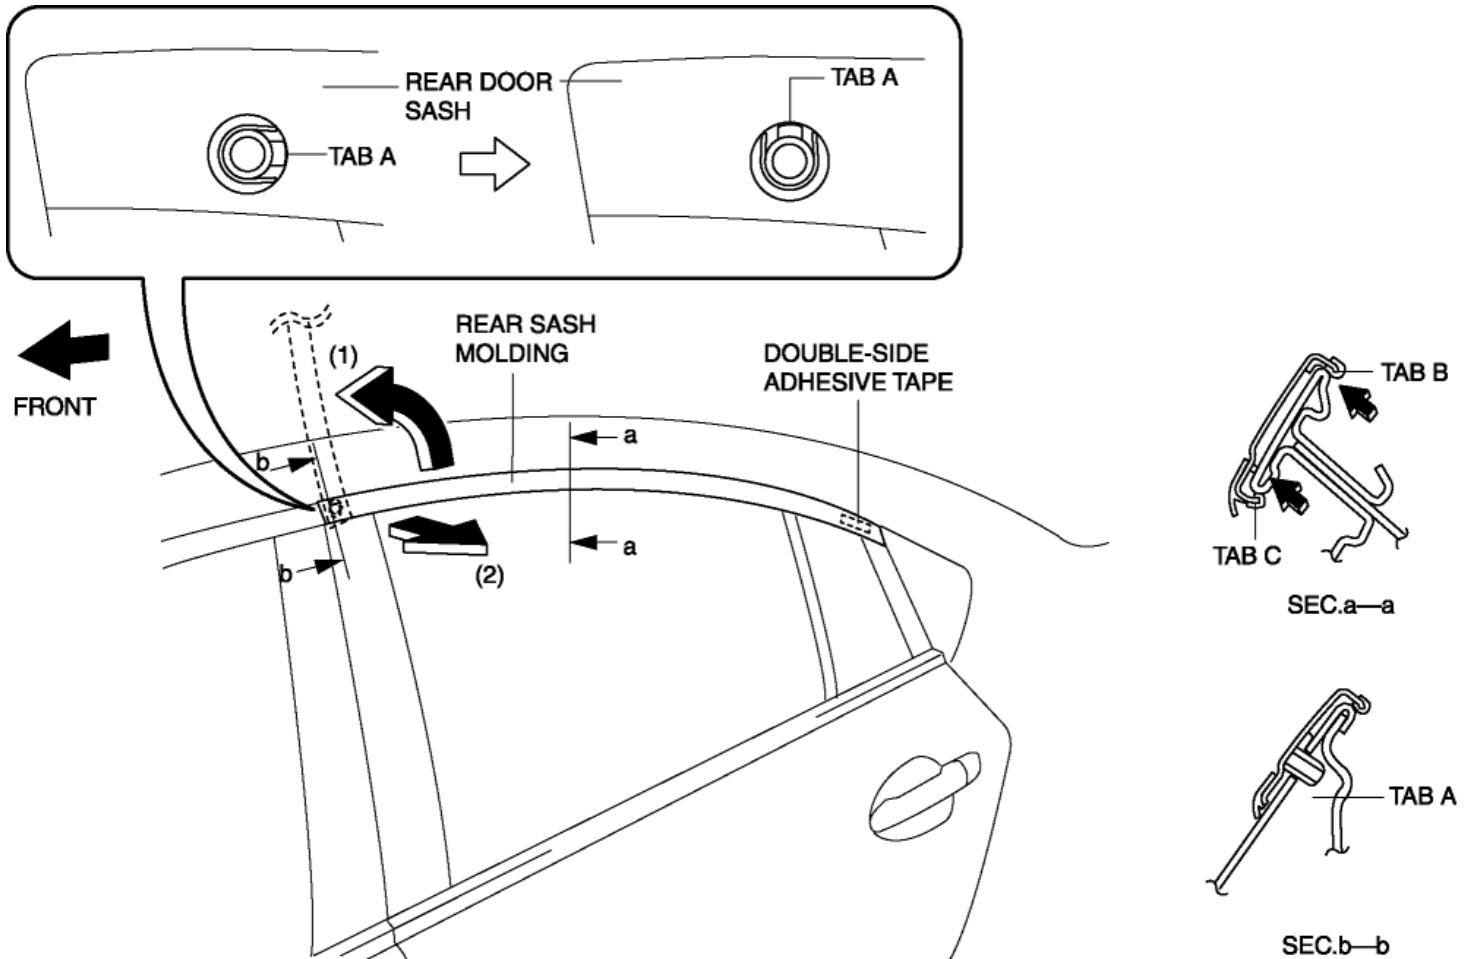

2. While cutting the double-sided adhesive tape using a flathead screwdriver or a razor, separate the rear sash molding from the body.
3. Press tab B in the direction of the arrow and remove it.
4. Rotate the front sash molding 90° in the direction of the arrow (1) shown in the figure, disconnect the tab A, and pull out the rear sash molding in the direction of the arrow (2).
5. Remove the rear sash molding.


2012 - Mazda6 - Body and Accessories

REAR SASH MOLDING REMOVAL

WARNING:

- Using a razor with bare hands can cause injury. Always wear gloves when using a razor.

1. Press tab C in the direction of the arrow and remove it.

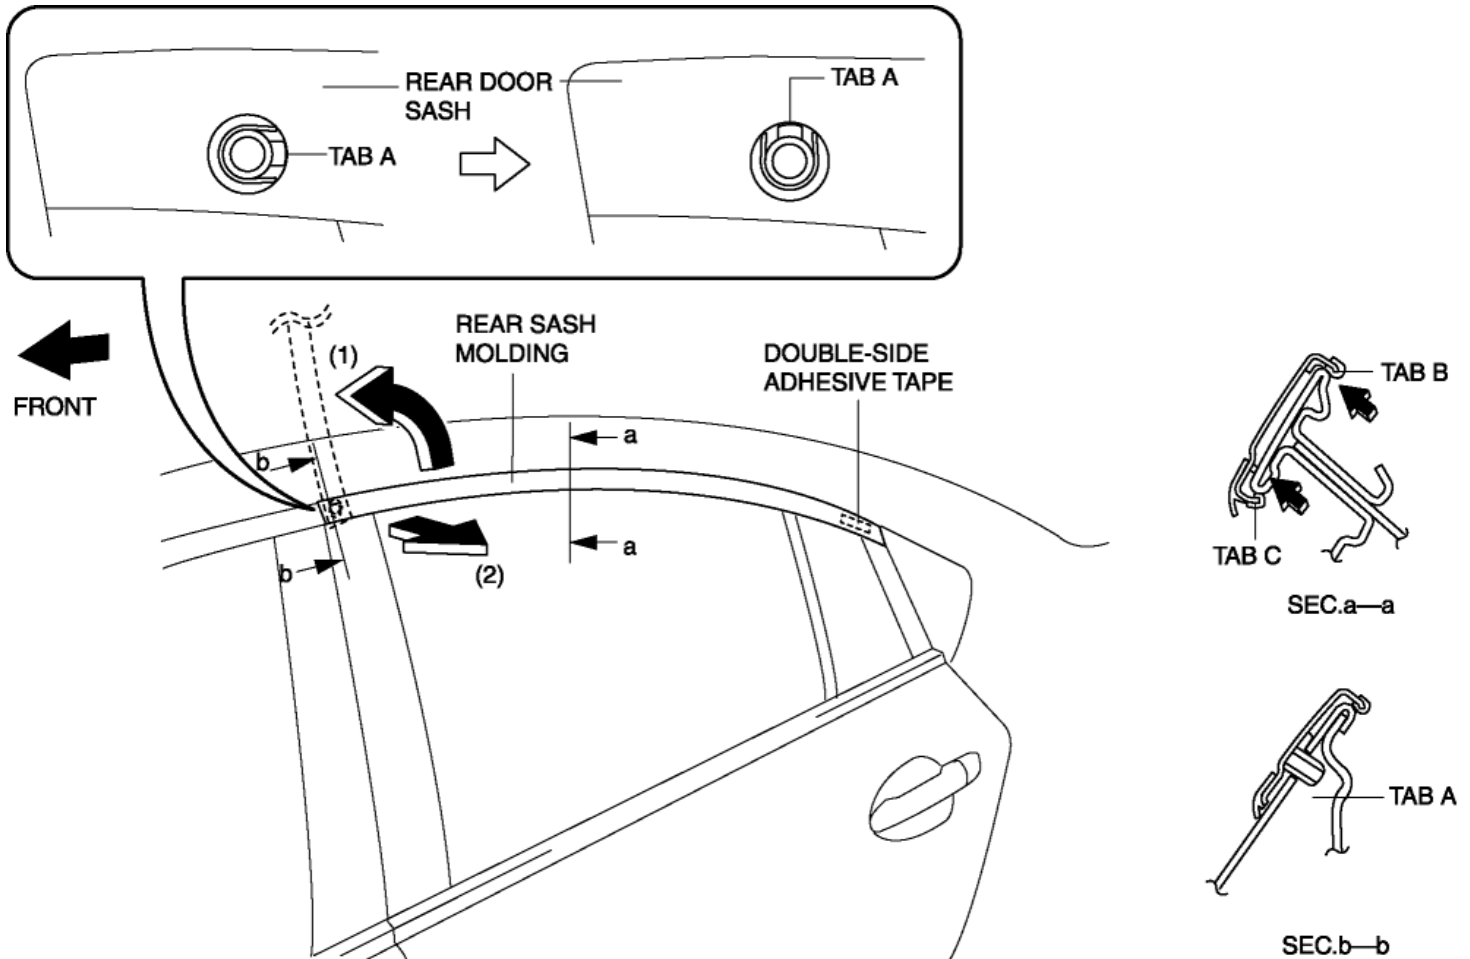

2. While cutting the double-sided adhesive tape using a flathead screwdriver or a razor, separate the rear sash molding from the body.
3. Press tab B in the direction of the arrow and remove it.
4. Rotate the front sash molding 90° in the direction of the arrow (1) shown in the figure, disconnect the tab A, and pull out the rear sash molding in the direction of the arrow (2).
5. Remove the rear sash molding.