


2012 - Mazda6 - Body and Accessories

DOOR SASH FILM REMOVAL

1. Partially peel back the glass run channel.
2. Partially peel back the door weatherstrip.
3. Remove the following parts:
 - a. Inner garnish (See [INNER GARNISH REMOVAL/ INSTALLATION.](#))
 - b. Front door trim (See [FRONT DOOR TRIM REMOVAL/ INSTALLATION.](#))
 - c. Power outer mirror (See [POWER OUTER MIRROR REMOVAL/ INSTALLATION.](#))
 - d. Rear door trim (See [REAR DOOR TRIM REMOVAL/ INSTALLATION.](#))
 - e. Rear door speaker (See [REAR DOOR SPEAKER REMOVAL/ INSTALLATION.](#))
 - f. Rear door quarter glass (See [REAR DOOR QUARTER GLASS REMOVAL/ INSTALLATION.](#))
 - g. Rear sash molding (See [REAR SASH MOLDING REMOVAL.](#))
 - h. Front sash molding (See [FRONT SASH MOLDING REMOVAL.](#))
 - i. Front beltline molding (See [FRONT BELTLINE MOLDING REMOVAL/ INSTALLATION.](#))
 - j. Rear beltline molding (See [REAR BELTLINE MOLDING REMOVAL/ INSTALLATION.](#))
4. Peel off the rear sash film by pulling it outward from one end.

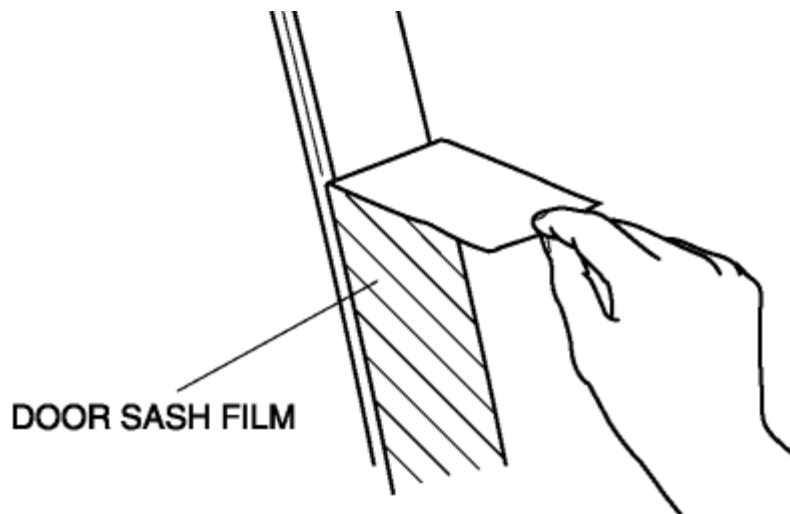


NOTE:

- Slowly remove the door sash film since it may tear easily.

2012 - Mazda6 - Body and Accessories

DOOR SASH FILM REMOVAL

1. Partially peel back the glass run channel.
2. Partially peel back the door weatherstrip.
3. Remove the following parts:
 - a. Inner garnish (See [INNER GARNISH REMOVAL/ INSTALLATION.](#))
 - b. Front door trim (See [FRONT DOOR TRIM REMOVAL/ INSTALLATION.](#))
 - c. Power outer mirror (See [POWER OUTER MIRROR REMOVAL/ INSTALLATION.](#))
 - d. Rear door trim (See [REAR DOOR TRIM REMOVAL/ INSTALLATION.](#))
 - e. Rear door speaker (See [REAR DOOR SPEAKER REMOVAL/ INSTALLATION.](#))
 - f. Rear door quarter glass (See [REAR DOOR QUARTER GLASS REMOVAL/ INSTALLATION.](#))
 - g. Rear sash molding (See [REAR SASH MOLDING REMOVAL.](#))
 - h. Front sash molding (See [FRONT SASH MOLDING REMOVAL.](#))
 - i. Front beltline molding (See [FRONT BELTLINE MOLDING REMOVAL/ INSTALLATION.](#))
 - j. Rear beltline molding (See [REAR BELTLINE MOLDING REMOVAL/ INSTALLATION.](#))
4. Peel off the rear sash film by pulling it outward from one end.

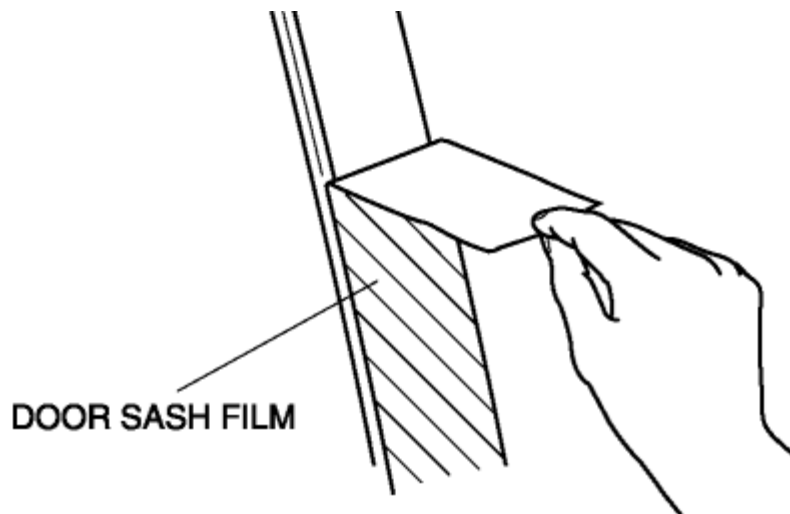

NOTE:

- Slowly remove the door sash film since it may tear easily.

