




2012 - Mazda6 - Body and Accessories

DOOR SASH FILM INSTALLATION

1. Remove any grease or dirt from the affixing surface of the door.
2. Cut away the unused portion along the dotted lines.

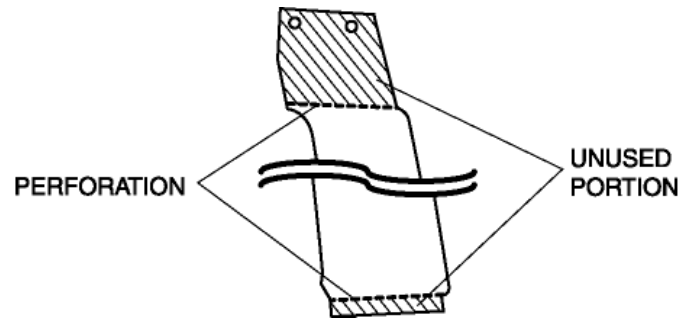

3. Peel off the backing paper and attach the door sash film onto the door as shown in the figure.

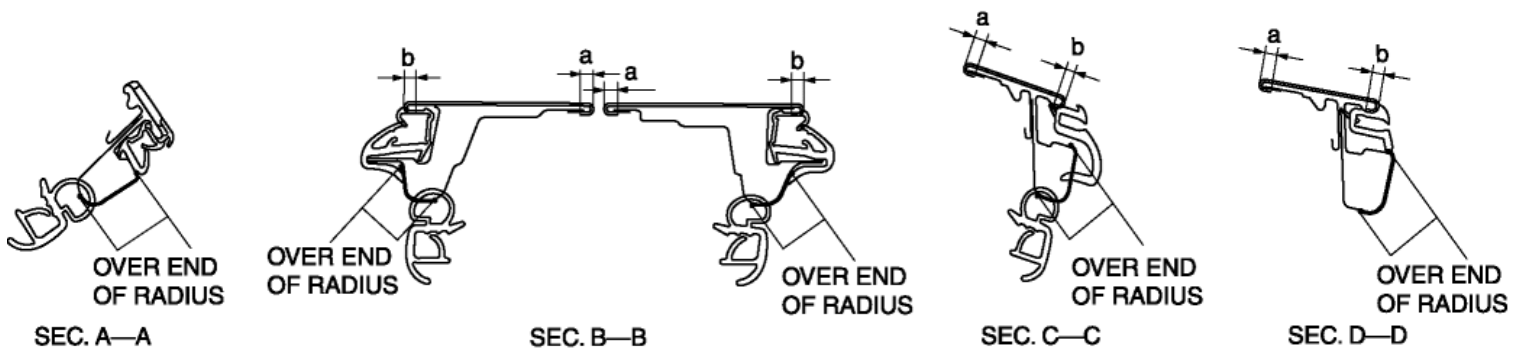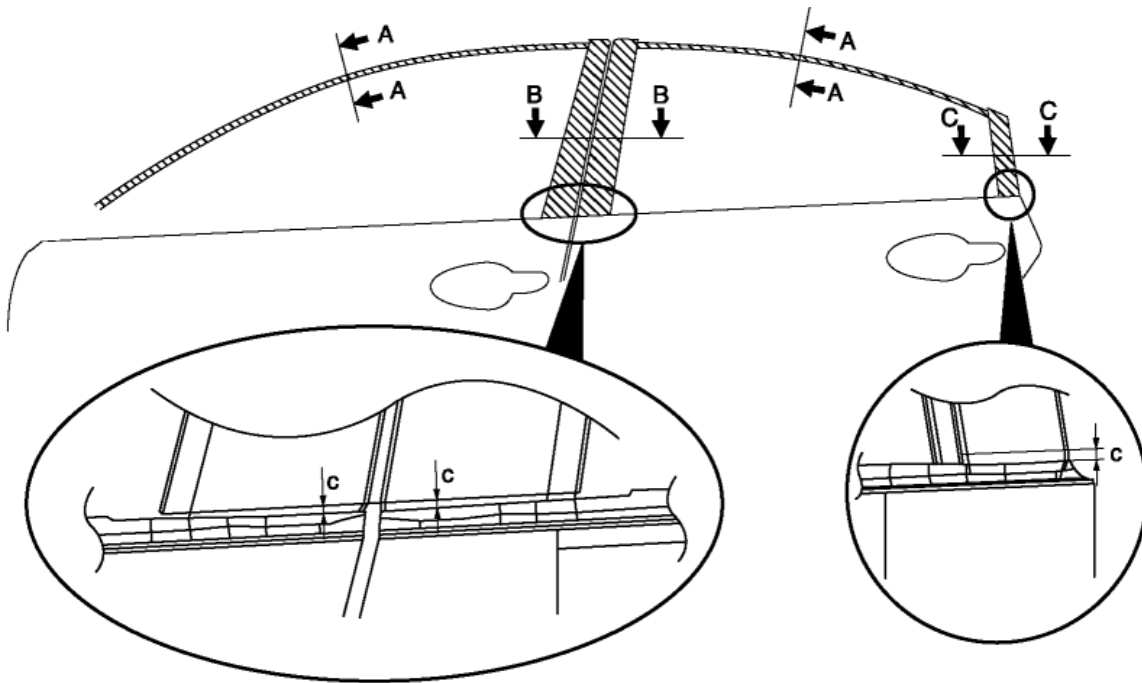

Standard clearance

- a: 3.0—5.0 mm {0.12—0.19 in}
- b: 3.0 mm or more {0.12 in or more}
- c: 4.0—6.0 mm {0.16—0.23 in}

4. Peel off the transparent protective film on the door sash film.

5. Install the following parts:

- a. Rear beltline molding (See [REAR BELTLINE MOLDING REMOVAL/ INSTALLATION.](#))
- b. Front beltline molding (See [FRONT BELTLINE MOLDING REMOVAL/ INSTALLATION.](#))
- c. Rear sash molding (See [REAR SASH MOLDING INSTALLATION.](#))
- d. Front sash molding (See [FRONT SASH MOLDING INSTALLATION.](#))
- e. Rear door quarter glass (See [REAR DOOR QUARTER GLASS REMOVAL/ INSTALLATION.](#))
- f. Rear door speaker (See [REAR DOOR SPEAKER REMOVAL/ INSTALLATION.](#))
- g. Rear door trim (See [REAR DOOR TRIM REMOVAL/ INSTALLATION.](#))
- h. Power outer mirror (See [POWER OUTER MIRROR REMOVAL/ INSTALLATION.](#))
- i. Front door trim (See [FRONT DOOR TRIM REMOVAL/ INSTALLATION.](#))
- j. Inner garnish (See [INNER GARNISH REMOVAL/ INSTALLATION.](#))

[< Previous](#) [Next >](#)


© 2012 Mazda North American Operations, U.S.A.

[Back to Top](#)



2012 - Mazda6 - Body and Accessories

DOOR SASH FILM INSTALLATION

1. Remove any grease or dirt from the affixing surface of the door.
2. Cut away the unused portion along the dotted lines.

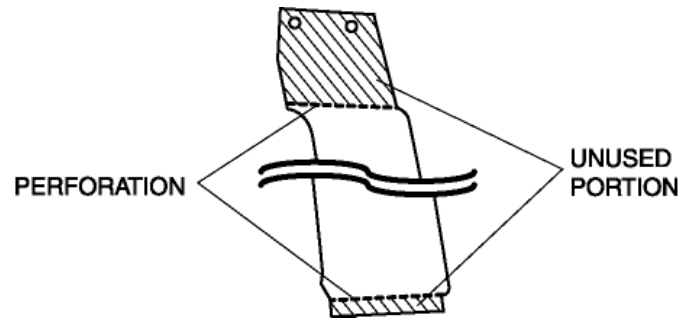

3. Peel off the backing paper and attach the door sash film onto the door as shown in the figure.

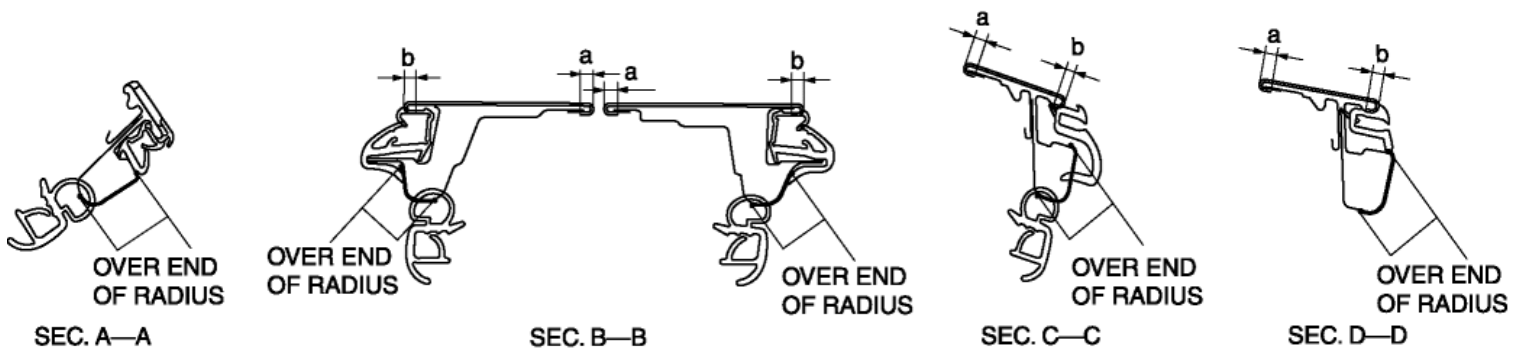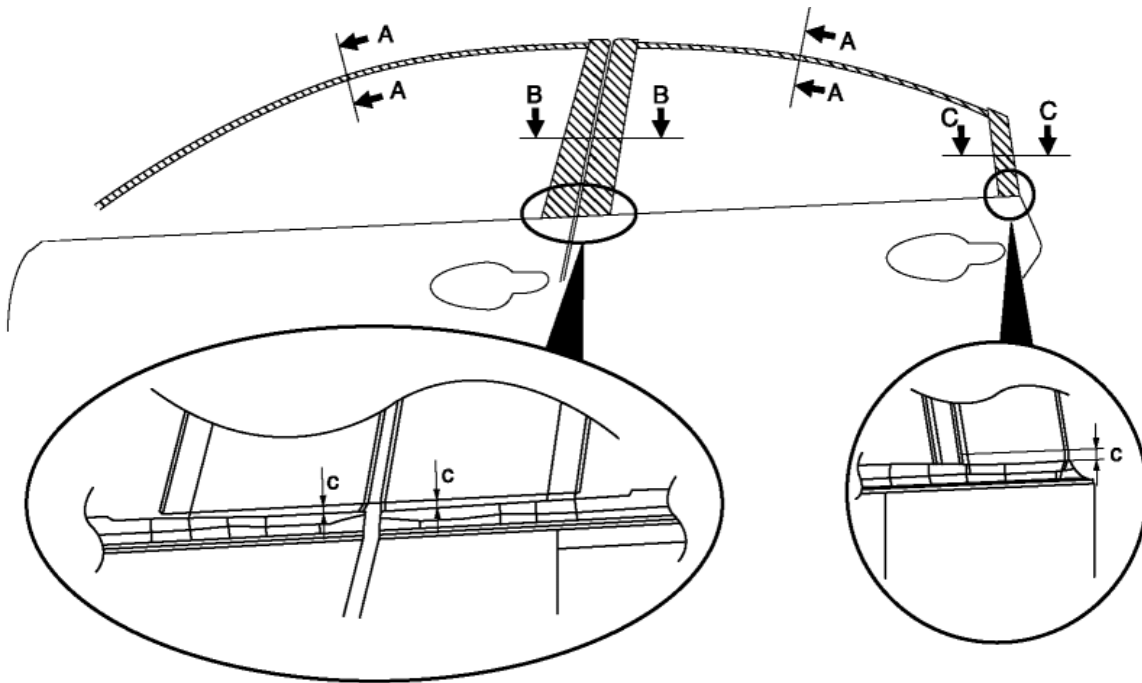

Standard clearance

- a: 3.0—5.0 mm {0.12—0.19 in}
- b: 3.0 mm or more {0.12 in or more}
- c: 4.0—6.0 mm {0.16—0.23 in}

4. Peel off the transparent protective film on the door sash film.

5. Install the following parts:

- a. Rear beltline molding (See [REAR BELTLINE MOLDING REMOVAL/ INSTALLATION.](#))
- b. Front beltline molding (See [FRONT BELTLINE MOLDING REMOVAL/ INSTALLATION.](#))
- c. Rear sash molding (See [REAR SASH MOLDING INSTALLATION.](#))
- d. Front sash molding (See [FRONT SASH MOLDING INSTALLATION.](#))
- e. Rear door quarter glass (See [REAR DOOR QUARTER GLASS REMOVAL/ INSTALLATION.](#))
- f. Rear door speaker (See [REAR DOOR SPEAKER REMOVAL/ INSTALLATION.](#))
- g. Rear door trim (See [REAR DOOR TRIM REMOVAL/ INSTALLATION.](#))
- h. Power outer mirror (See [POWER OUTER MIRROR REMOVAL/ INSTALLATION.](#))
- i. Front door trim (See [FRONT DOOR TRIM REMOVAL/ INSTALLATION.](#))
- j. Inner garnish (See [INNER GARNISH REMOVAL/ INSTALLATION.](#))

[< Previous](#) [Next >](#)

© 2012 Mazda North American Operations, U.S.A.

[Back to Top](#)