


2012 - Mazda6 - Body and Accessories

FRONT SASH MOLDING INSTALLATION

1. Hook tab A to the body in the position where tabs B align with the sash holes.

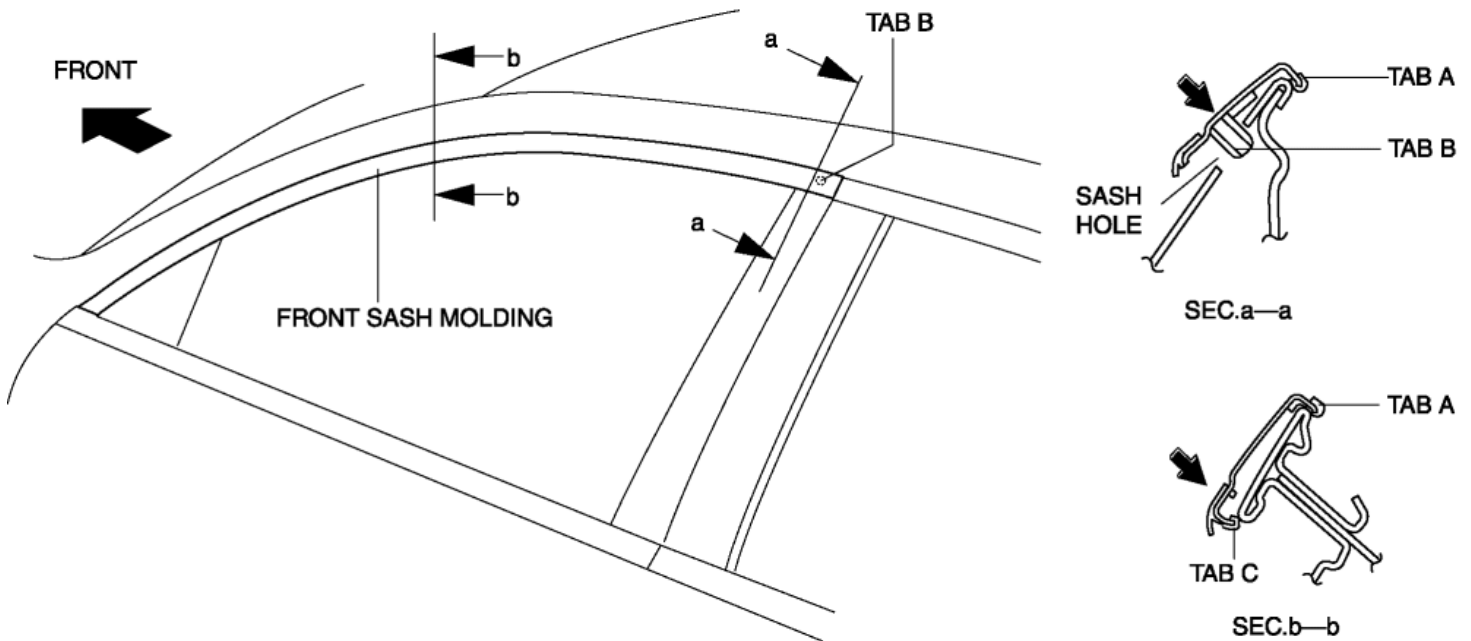

2. Press the front sash molding in the direction of the arrow and install tabs B to the body.

CAUTION:

- Do not press the front sash molding in any place other than the rubber areas.

3. Press the front sash molding from the vehicle rear in the direction shown in the arrow and install tab C.


NOTE:

- After installing the front sash molding, verify that tabs A and B are connected properly to the body.
4. Install the power outer mirror. (See [POWER OUTER MIRROR REMOVAL/ INSTALLATION](#))
 5. Install the front door trim. (See [FRONT DOOR TRIM REMOVAL/ INSTALLATION](#))
 6. Install the inner garnish. (See [INNER GARNISH REMOVAL/ INSTALLATION](#))

2012 - Mazda6 - Body and Accessories

FRONT SASH MOLDING INSTALLATION

1. Hook tab A to the body in the position where tabs B align with the sash holes.

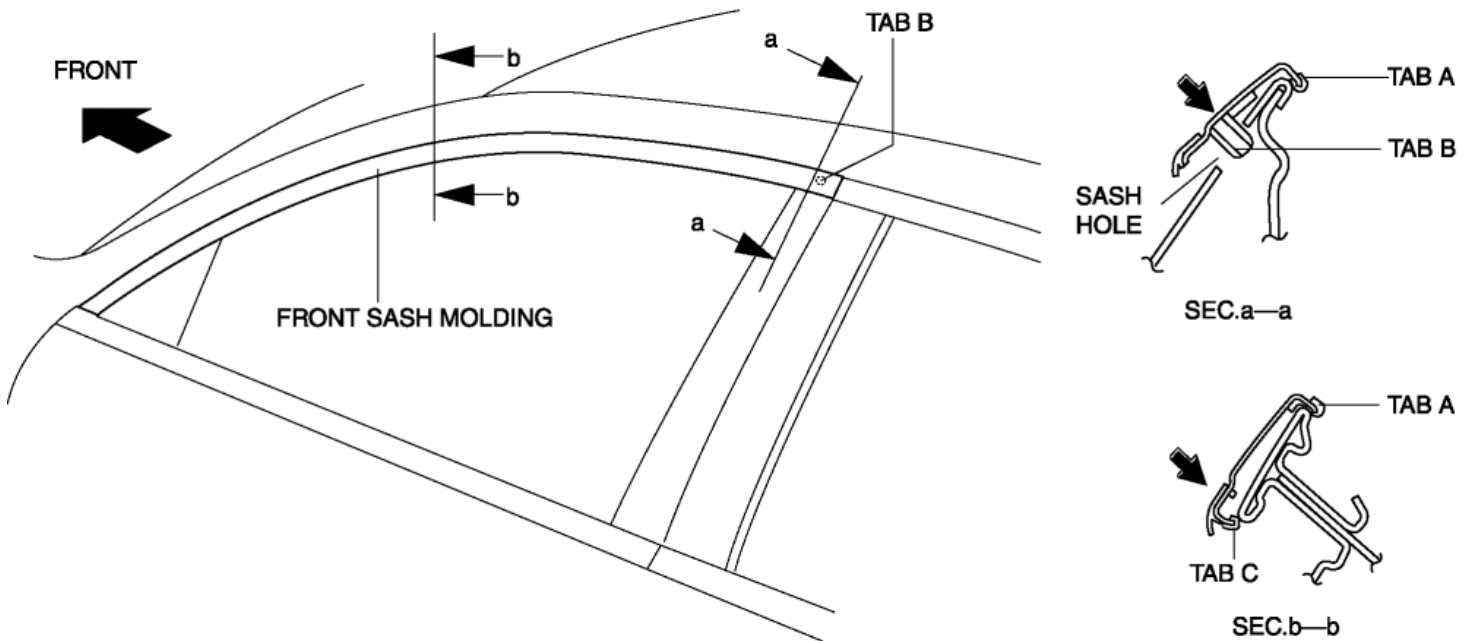

2. Press the front sash molding in the direction of the arrow and install tabs B to the body.

CAUTION:

- Do not press the front sash molding in any place other than the rubber areas.

3. Press the front sash molding from the vehicle rear in the direction shown in the arrow and install tab C.

NOTE:

- After installing the front sash molding, verify that tabs A and B are connected properly to the body.
4. Install the power outer mirror. (See [POWER OUTER MIRROR REMOVAL/ INSTALLATION](#))
 5. Install the front door trim. (See [FRONT DOOR TRIM REMOVAL/ INSTALLATION](#))
 6. Install the inner garnish. (See [INNER GARNISH REMOVAL/ INSTALLATION](#))