


2012 - Mazda6 - Body and Accessories

AERODYNAMIC UNDER COVER NO.1 REMOVAL/ INSTALLATION

1. Remove the bolts A and clip B.

BOLT A: 1.0—2.0 N·m {11—20 kgf·cm, 8.9—17 in·lbf}

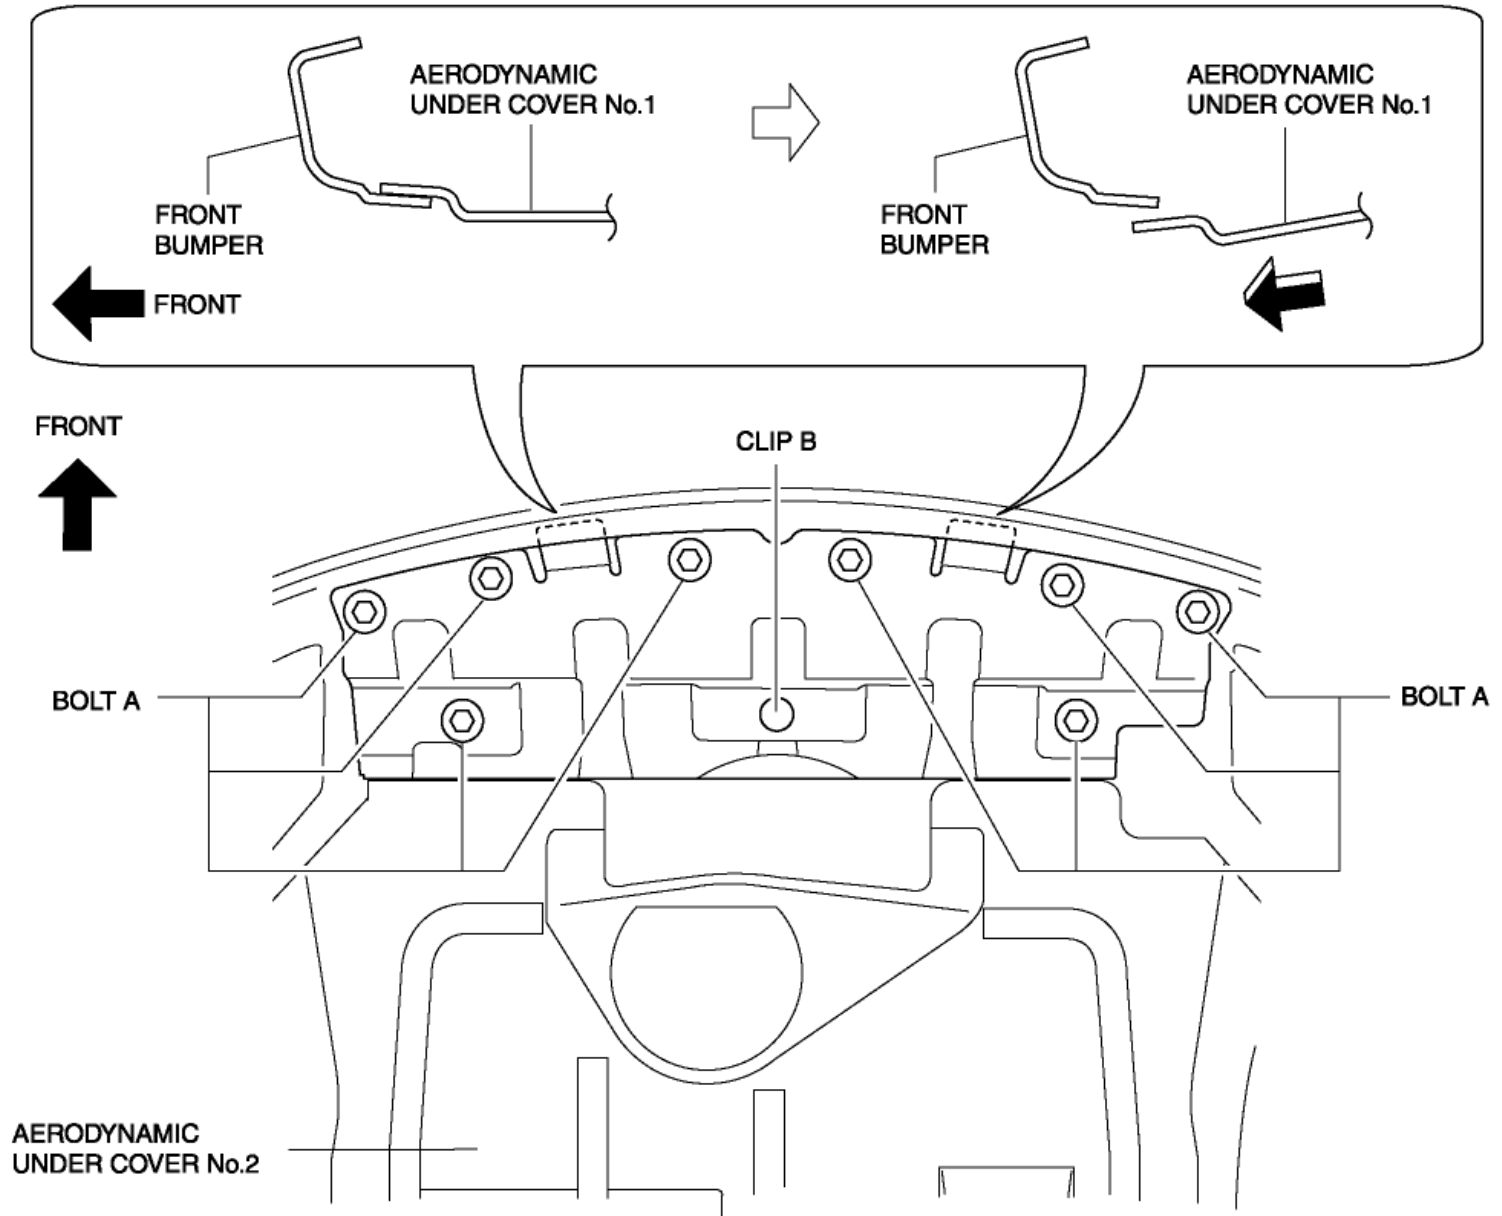

2. Set aside the aerodynamic under cover No.1 from the front bumper, then remove the aerodynamic under cover No.1 in the direction of the arrow shown in the figure.

CAUTION:

- Be careful not to damage the aerodynamic under cover No.1 during removal.


3. Install in the reverse order of removal.

2012 - Mazda6 - Body and Accessories

AERODYNAMIC UNDER COVER NO.1 REMOVAL/ INSTALLATION

1. Remove the bolts A and clip B.

BOLT A: 1.0—2.0 N·m {11—20 kgf·cm, 8.9—17 in·lbf}

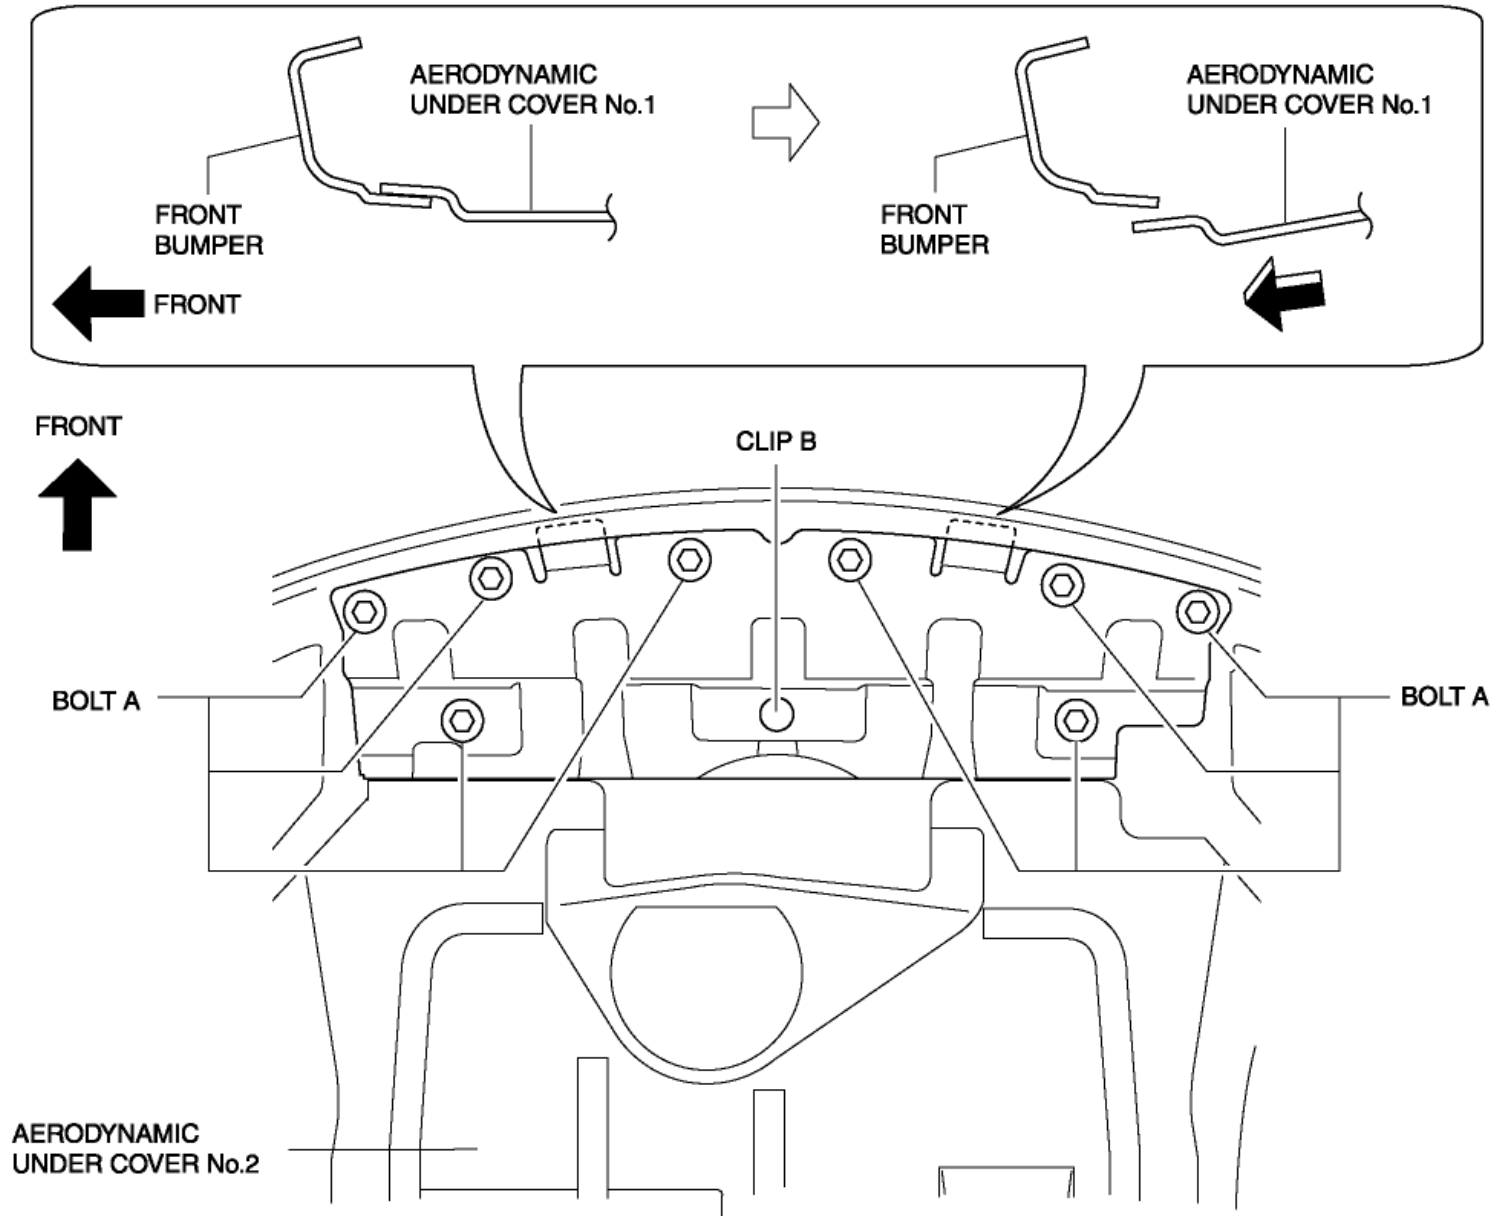

2. Set aside the aerodynamic under cover No.1 from the front bumper, then remove the aerodynamic under cover No.1 in the direction of the arrow shown in the figure.

CAUTION:

- Be careful not to damage the aerodynamic under cover No.1 during removal.

3. Install in the reverse order of removal.