


2012 - Mazda6 - Body and Accessories



RECESS REMOVAL/ INSTALLATION

1. Insert a fastener remover in the position indicated by the arrow in the figure and detach tabs A.

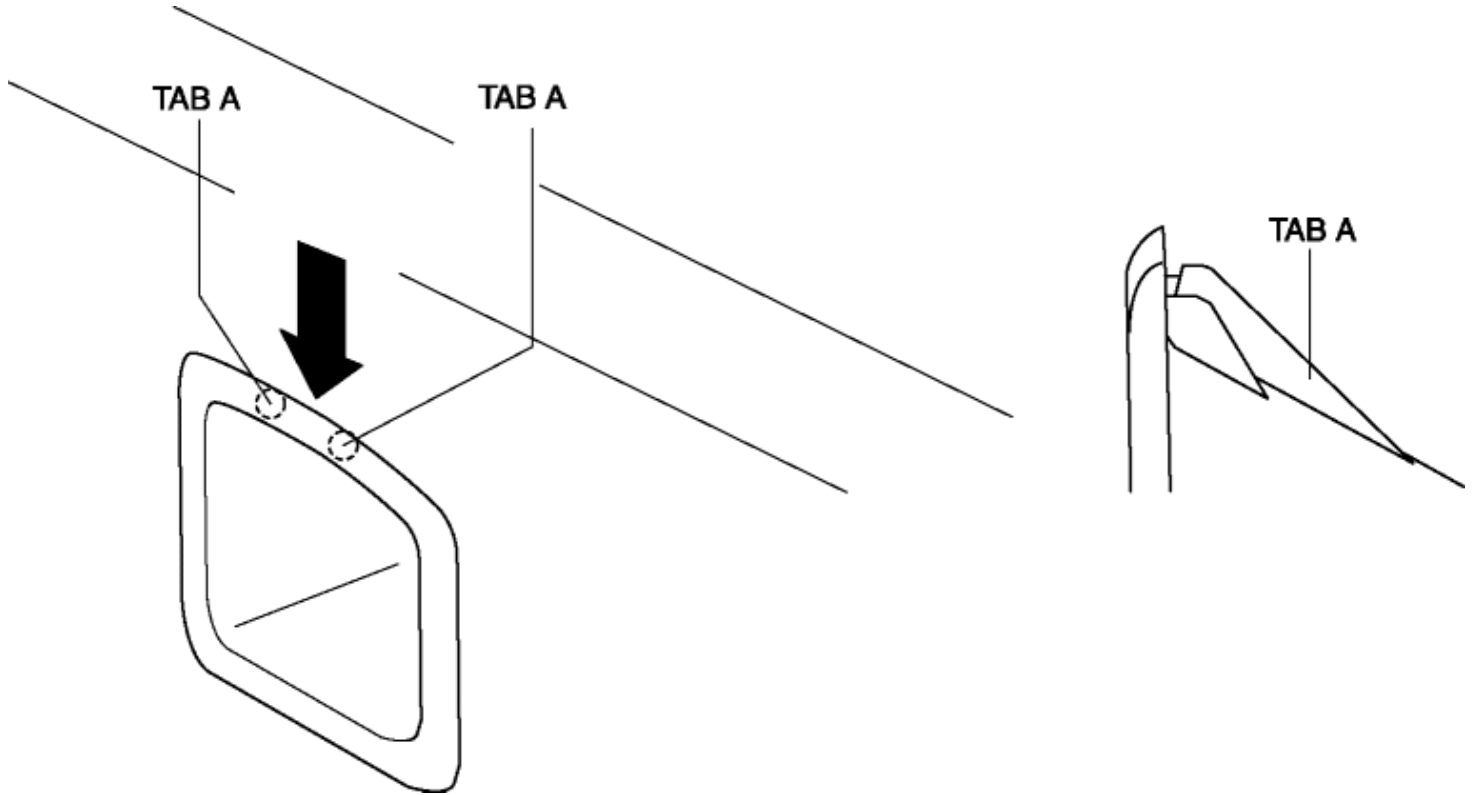

2. Remove the recess in the direction of the arrow shown in the figure avoiding tabs B.

RECESS

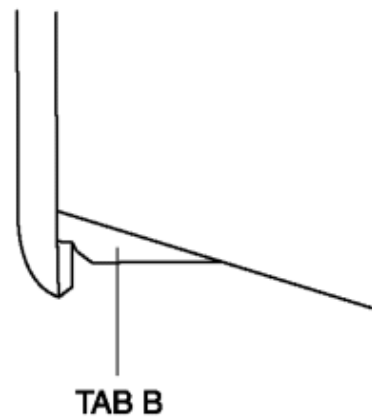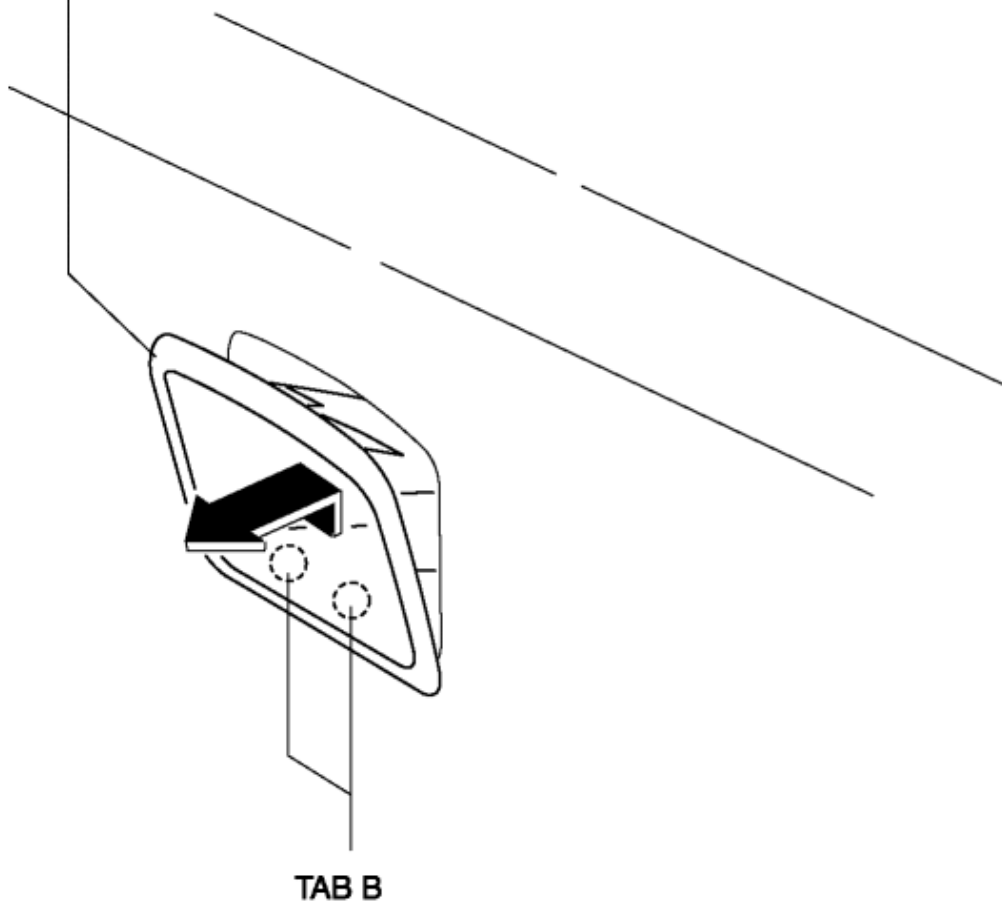

3. Install in the reverse order of removal.

[< Previous](#) [Next >](#)


[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.

2012 - Mazda6 - Body and Accessories



RECESS REMOVAL/ INSTALLATION

1. Insert a fastener remover in the position indicated by the arrow in the figure and detach tabs A.

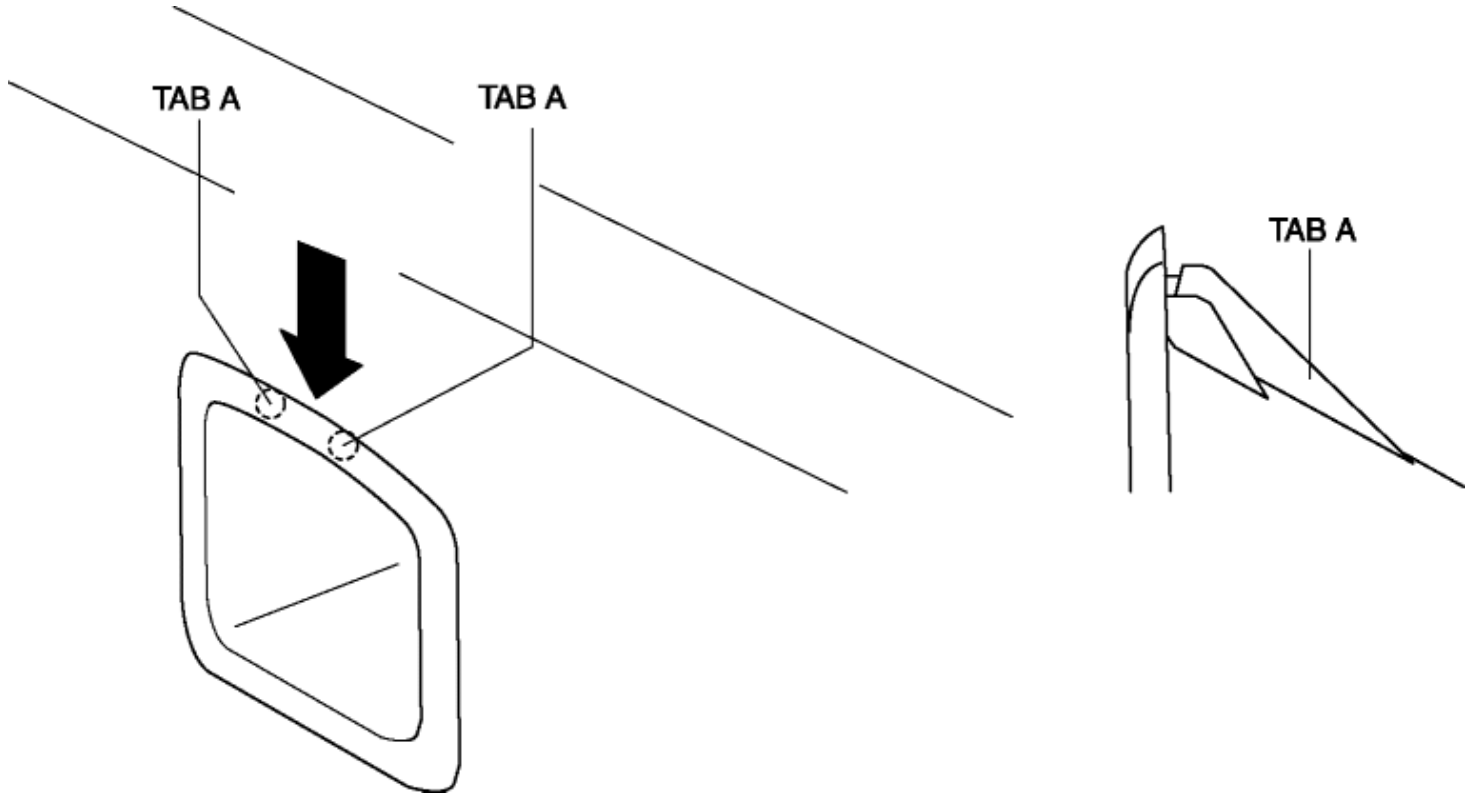

2. Remove the recess in the direction of the arrow shown in the figure avoiding tabs B.

RECESS

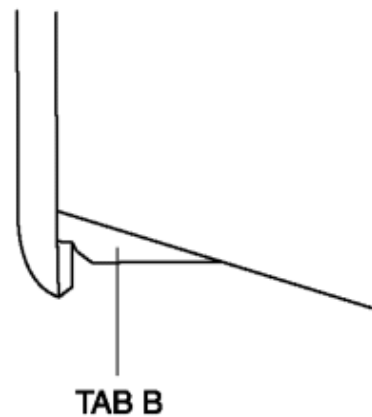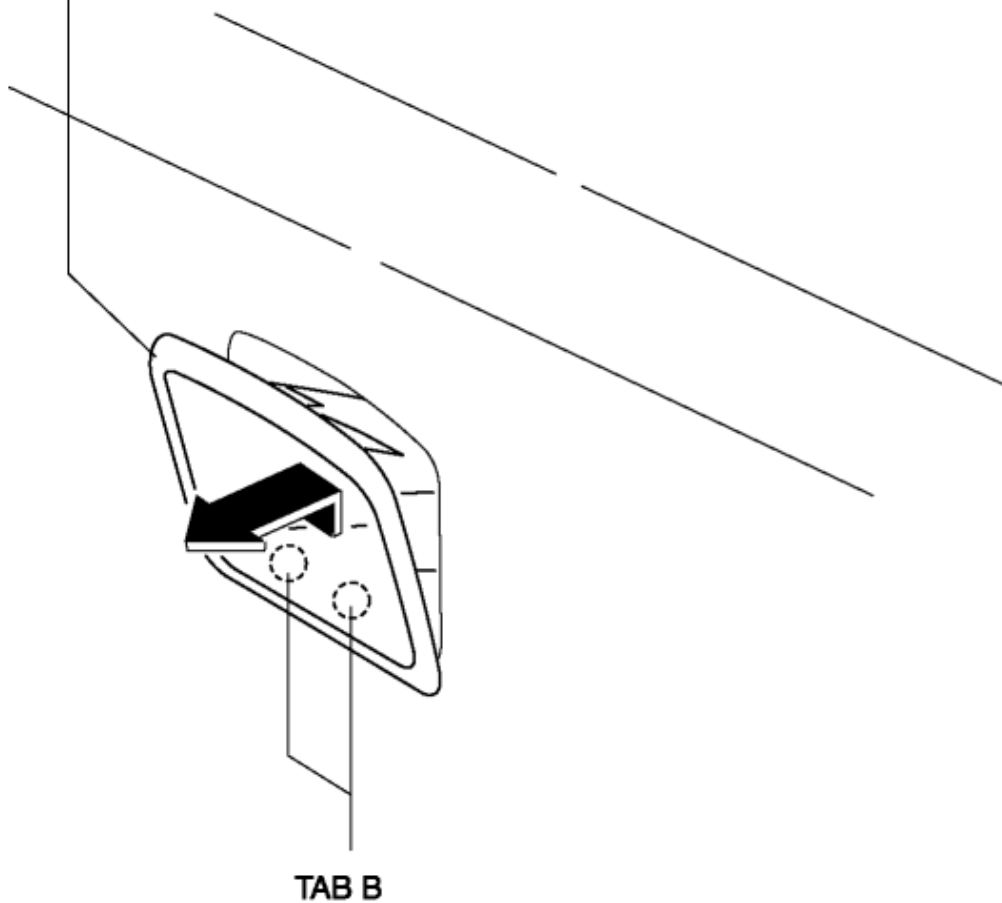

3. Install in the reverse order of removal.

[< Previous](#) [Next >](#)

© 2012 Mazda North American Operations, U.S.A.

[Back to Top](#)