



2012 - Mazda6 - Body and Accessories

LICENSE PLATE LIGHT BULB REMOVAL/ INSTALLATION

1. Disconnect the negative battery cable.
2. Partially peel back the trunk lid trim. (See [TRUNK LID TRIM REMOVAL/ INSTALLATION](#).)
3. Disconnect the license plate light connector.

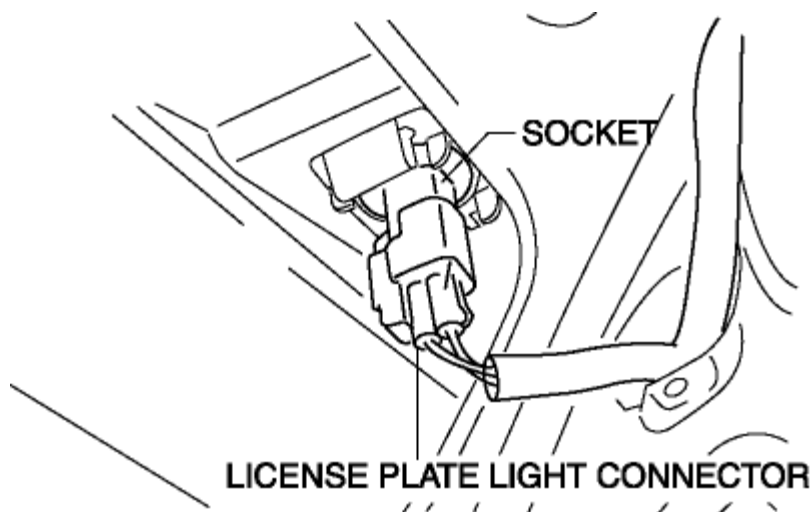

4. Rotate the socket in the direction of the arrow shown in the figure to remove it.

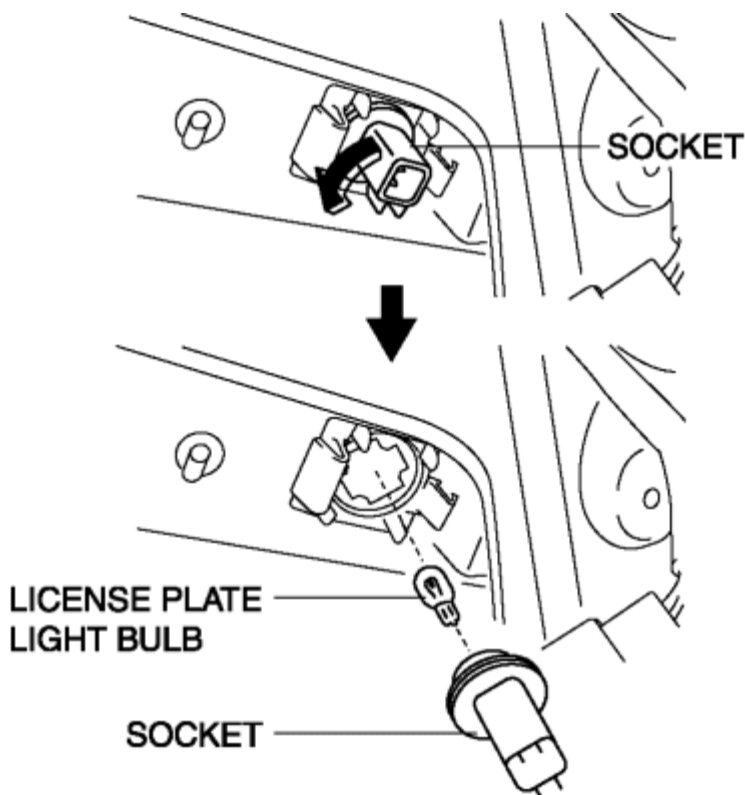

5. Remove the license plate light bulb.
6. Install in the reverse order of removal.

[< Previous](#) [Next >](#)


[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.


2012 - Mazda6 - Body and Accessories

LICENSE PLATE LIGHT BULB REMOVAL/ INSTALLATION

1. Disconnect the negative battery cable.
2. Partially peel back the trunk lid trim. (See [TRUNK LID TRIM REMOVAL/ INSTALLATION](#).)
3. Disconnect the license plate light connector.

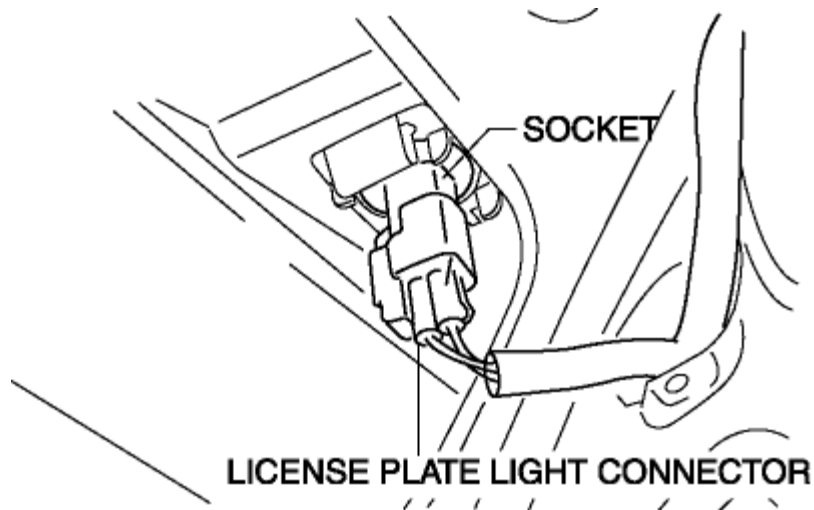

4. Rotate the socket in the direction of the arrow shown in the figure to remove it.

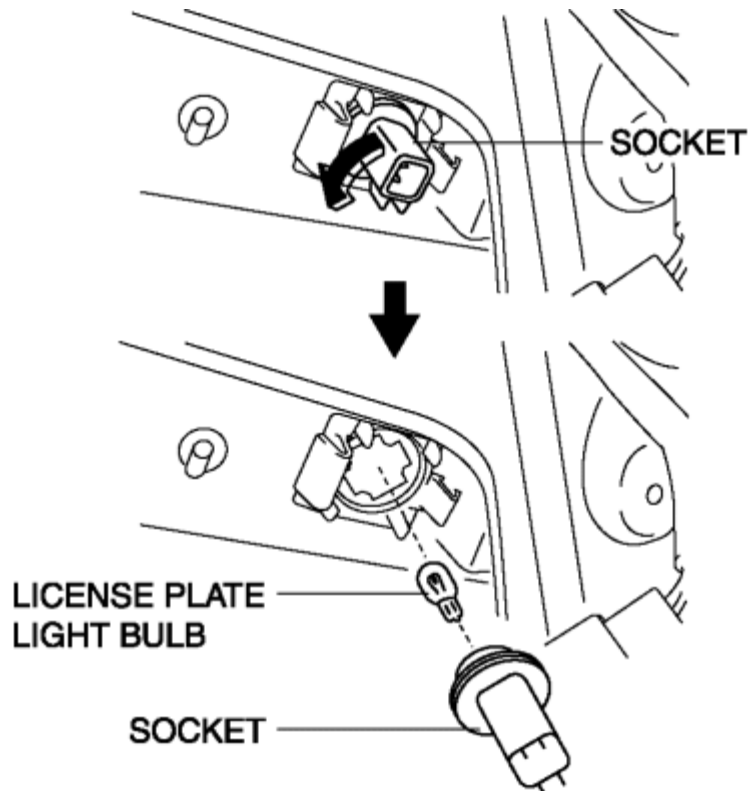

5. Remove the license plate light bulb.
6. Install in the reverse order of removal.

[< Previous](#) [Next >](#)

[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.