


2012 - Mazda6 - Body and Accessories

AUDIO AMPLIFIER REMOVAL/ INSTALLATION

- 1. Disconnect the negative battery cable.
- 2. Remove the following parts:
 - a. Front scuff plate (RH) (See FRONT SCUFF PLATE REMOVAL/ INSTALLATION.)
 - b. Front side trim (RH) (See FRONT SIDE TRIM REMOVAL/ INSTALLATION.)
 - c. Glove compartment (See GLOVE COMPARTMENT REMOVAL/ INSTALLATION.)
- 3. Remove in the order indicated in the table.

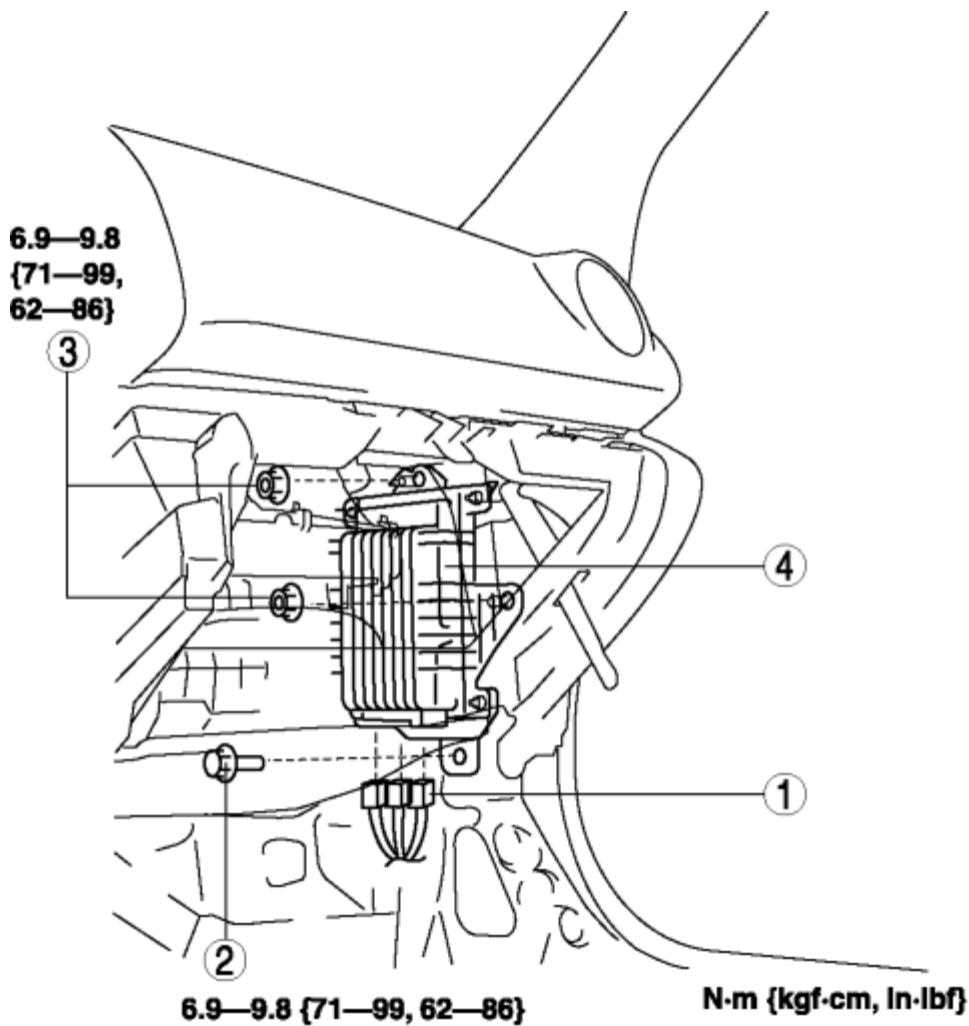

1	Connector
---	-----------

2	Bolt
3	Nut
4	Audio amplifier

4. Install in the reverse order of removal.

[< Previous](#) [Next >](#)


[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.

2012 - Mazda6 - Body and Accessories

AUDIO AMPLIFIER REMOVAL/ INSTALLATION

- 1. Disconnect the negative battery cable.
- 2. Remove the following parts:
 - a. Front scuff plate (RH) (See FRONT SCUFF PLATE REMOVAL/ INSTALLATION.)
 - b. Front side trim (RH) (See FRONT SIDE TRIM REMOVAL/ INSTALLATION.)
 - c. Glove compartment (See GLOVE COMPARTMENT REMOVAL/ INSTALLATION.)
- 3. Remove in the order indicated in the table.

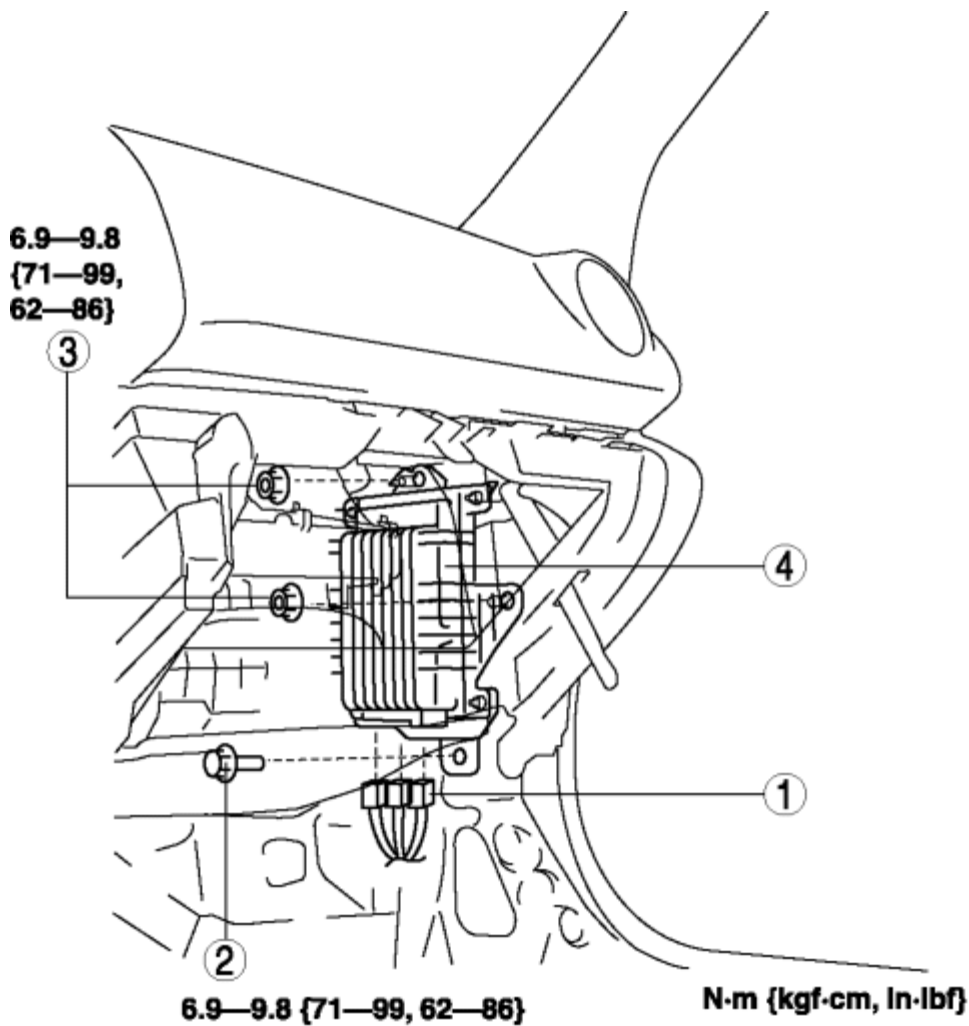

1	Connector
---	-----------

2	Bolt
3	Nut
4	Audio amplifier

4. Install in the reverse order of removal.

[< Previous](#) [Next >](#)

[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.