


2012 - Mazda6 - Body and Accessories

INSTRUMENT CLUSTER REMOVAL/ INSTALLATION

CAUTION:

- When replacing the instrument cluster, the configuration procedure must be performed before removing the instrument cluster. Replacing the instrument cluster without performing the configuration procedure will result in system malfunction.
1. Perform the instrument cluster configuration when replacing it. (See **INSTRUMENT CLUSTER CONFIGURATION**.)
 2. Disconnect the negative battery cable.
 3. Remove the meter hood. (See **METER HOOD REMOVAL/ INSTALLATION**.)
 4. Remove in the order indicated in the table.

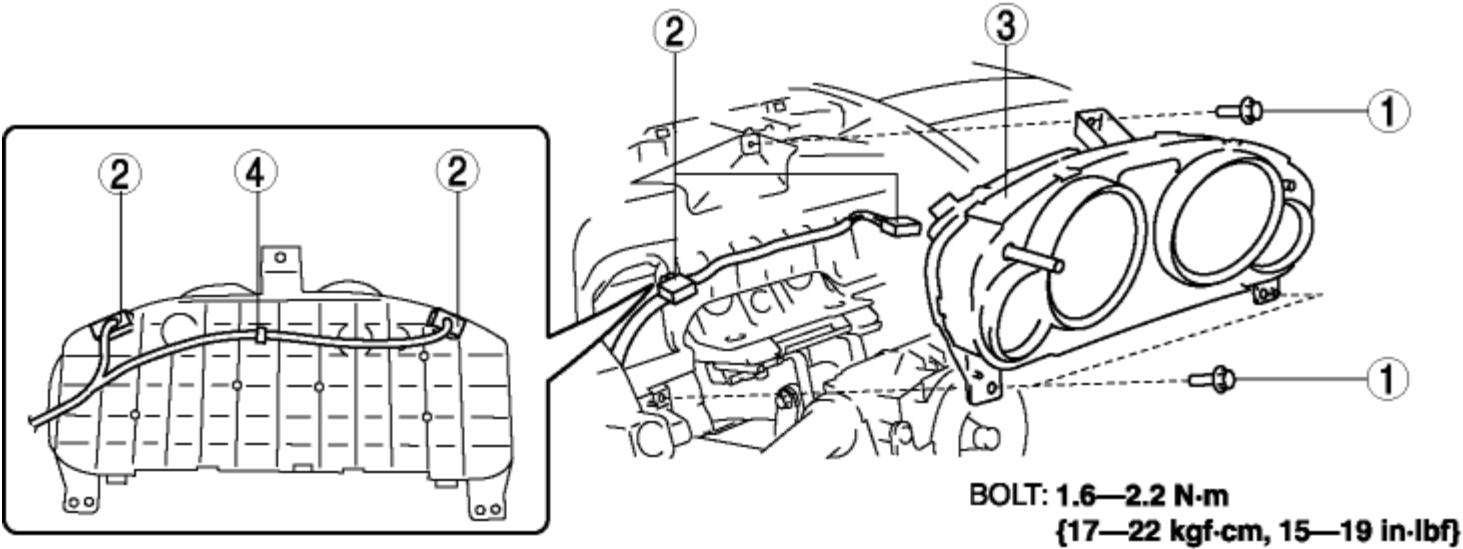


1 Bolt
2 Connector
3 Instrument cluster
4 Clip

5. Install in the reverse order of removal.

6. Program the immobilizer system-related parts when replacing the instrument cluster. (With keyless entry system) (See **IMMOBILIZER SYSTEM-RELATED PARTS PROGRAMMING [KEYLESS ENTRY SYSTEM]**.)

CAUTION:

- The removed instrument cluster should be placed with the display side up to prevent grease from leaking from the meters.

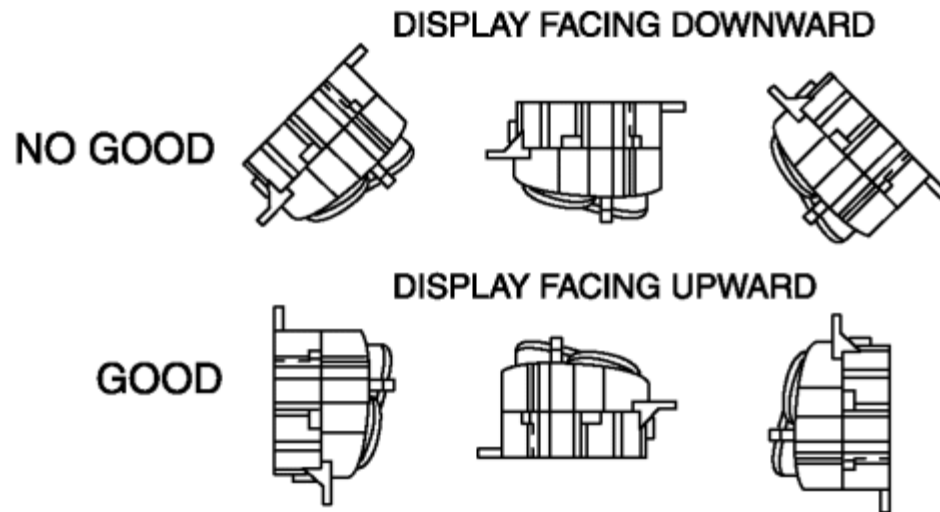

[< Previous](#) [Next >](#)


[Back to Top](#)

2012 - Mazda6 - Body and Accessories

INSTRUMENT CLUSTER REMOVAL/ INSTALLATION

CAUTION:

- When replacing the instrument cluster, the configuration procedure must be performed before removing the instrument cluster. Replacing the instrument cluster without performing the configuration procedure will result in system malfunction.
1. Perform the instrument cluster configuration when replacing it. (See **INSTRUMENT CLUSTER CONFIGURATION**.)
 2. Disconnect the negative battery cable.
 3. Remove the meter hood. (See **METER HOOD REMOVAL/ INSTALLATION**.)
 4. Remove in the order indicated in the table.

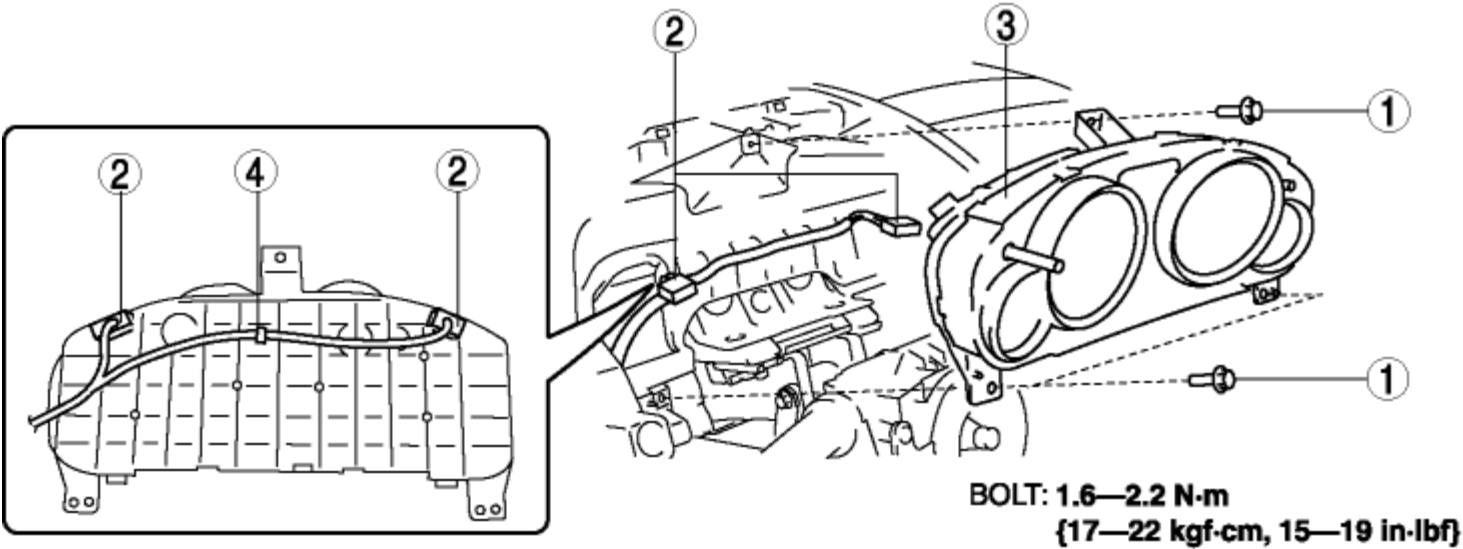


1 Bolt
2 Connector
3 Instrument cluster
4 Clip

5. Install in the reverse order of removal.

6. Program the immobilizer system-related parts when replacing the instrument cluster. (With keyless entry system) (See **IMMOBILIZER SYSTEM-RELATED PARTS PROGRAMMING [KEYLESS ENTRY SYSTEM]**.)

CAUTION:

- The removed instrument cluster should be placed with the display side up to prevent grease from leaking from the meters.

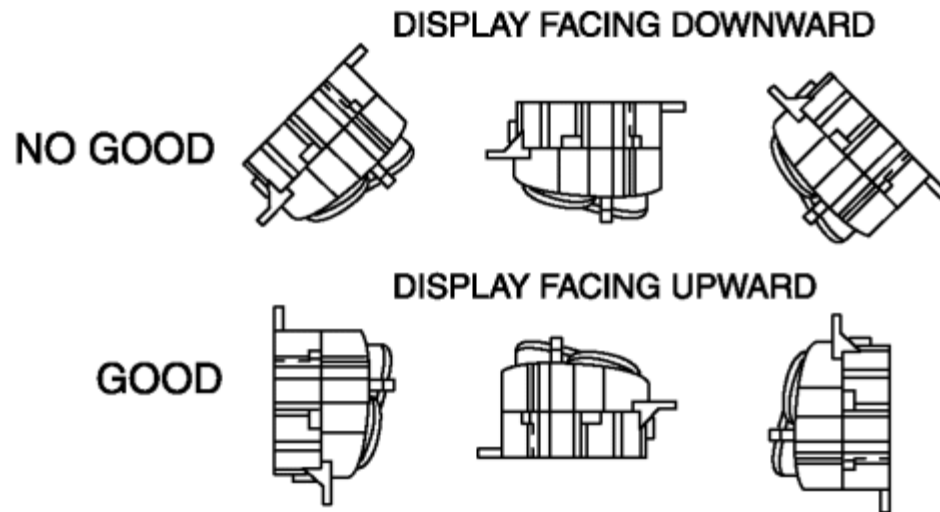

[< Previous](#) [Next >](#)

[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.