


2012 - Mazda6 - Body and Accessories

FOREWORD [MULTI PLEX COMMUNICATION SYSTEM]

- If the CAN system is considered to be the cause of the malfunction based on the repair order form and the malfunctioning symptom, follow the [Troubleshooting Procedure](#).
- DTCs are also output due to a control module or sensor malfunction, or incorrect power supply. Verify the output DTCs and first inspect the DTCs not shown in [DTC TABLE \[MULTI PLEX COMMUNICATION SYSTEM\]](#).
- If there is an open circuit in the communication lines, it is possible that signal error DTCs may be output in addition to communication error DTCs. Perform [DETERMINING MALFUNCTIONING PART \(HS-CAN\) \[MULTI PLEX COMMUNICATION SYSTEM\]](#), [DETERMINING MALFUNCTIONING PART \(MS-CAN\) \[MULTI PLEX COMMUNICATION SYSTEM\]](#) if the communication error and signal error DTCs are output simultaneously.

Troubleshooting Procedure

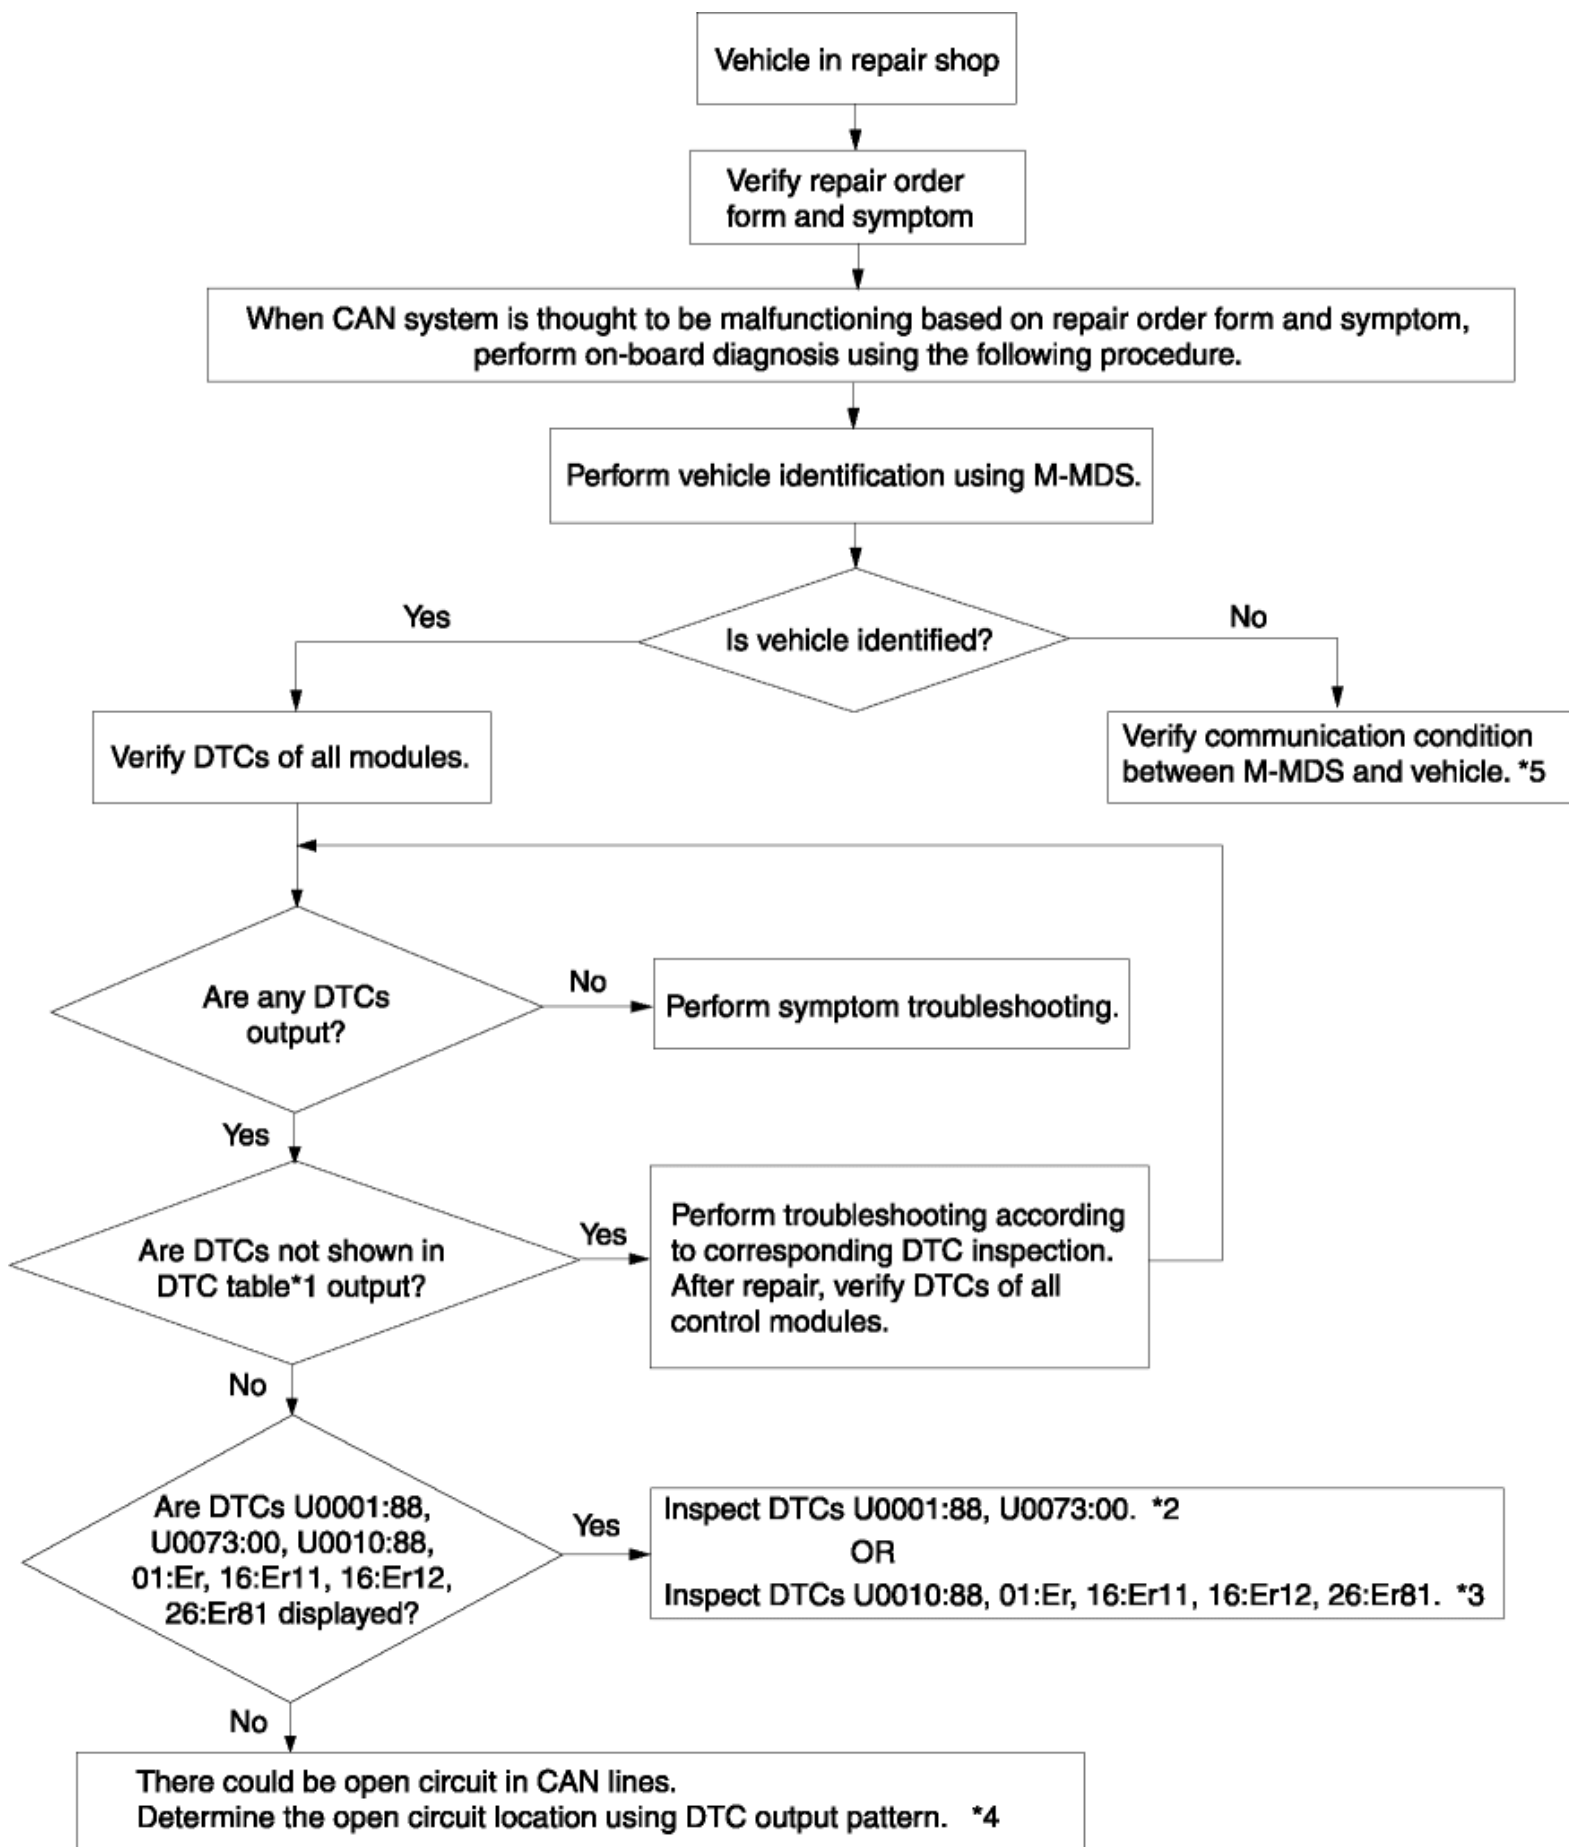

*1

DTC TABLE [MULTIPLEX COMMUNICATION SYSTEM]

*2

DTC U0001:88, U0073:00 [MULTI PLEX COMMUNICATION SYSTEM]

*3

DTC U0010:88, 01:Er, 16:Er11, 16:Er12, 26:Er81 [MULTI PLEX COMMUNICATION SYSTEM]

*4

DETERMINING MALFUNCTIONING PART (HS-CAN) [MULTI PLEX COMMUNICATION SYSTEM] / DETERMINING
MALFUNCTIONING PART (MS-CAN) [MULTI PLEX COMMUNICATION SYSTEM]

*5

M-MDS AND VEHICLE NOT COMMUNICATING [MULTI PLEX COMMUNICATION SYSTEM]

[< Previous](#) [Next >](#)

[Back to Top](#)


© 2012 Mazda North American Operations, U.S.A.

2012 - Mazda6 - Body and Accessories

FOREWORD [MULTI PLEX COMMUNICATION SYSTEM]

- If the CAN system is considered to be the cause of the malfunction based on the repair order form and the malfunctioning symptom, follow the [Troubleshooting Procedure](#).
- DTCs are also output due to a control module or sensor malfunction, or incorrect power supply. Verify the output DTCs and first inspect the DTCs not shown in [DTC TABLE \[MULTI PLEX COMMUNICATION SYSTEM\]](#).
- If there is an open circuit in the communication lines, it is possible that signal error DTCs may be output in addition to communication error DTCs. Perform [DETERMINING MALFUNCTIONING PART \(HS-CAN\) \[MULTI PLEX COMMUNICATION SYSTEM\]](#), [DETERMINING MALFUNCTIONING PART \(MS-CAN\) \[MULTI PLEX COMMUNICATION SYSTEM\]](#) if the communication error and signal error DTCs are output simultaneously.

Troubleshooting Procedure

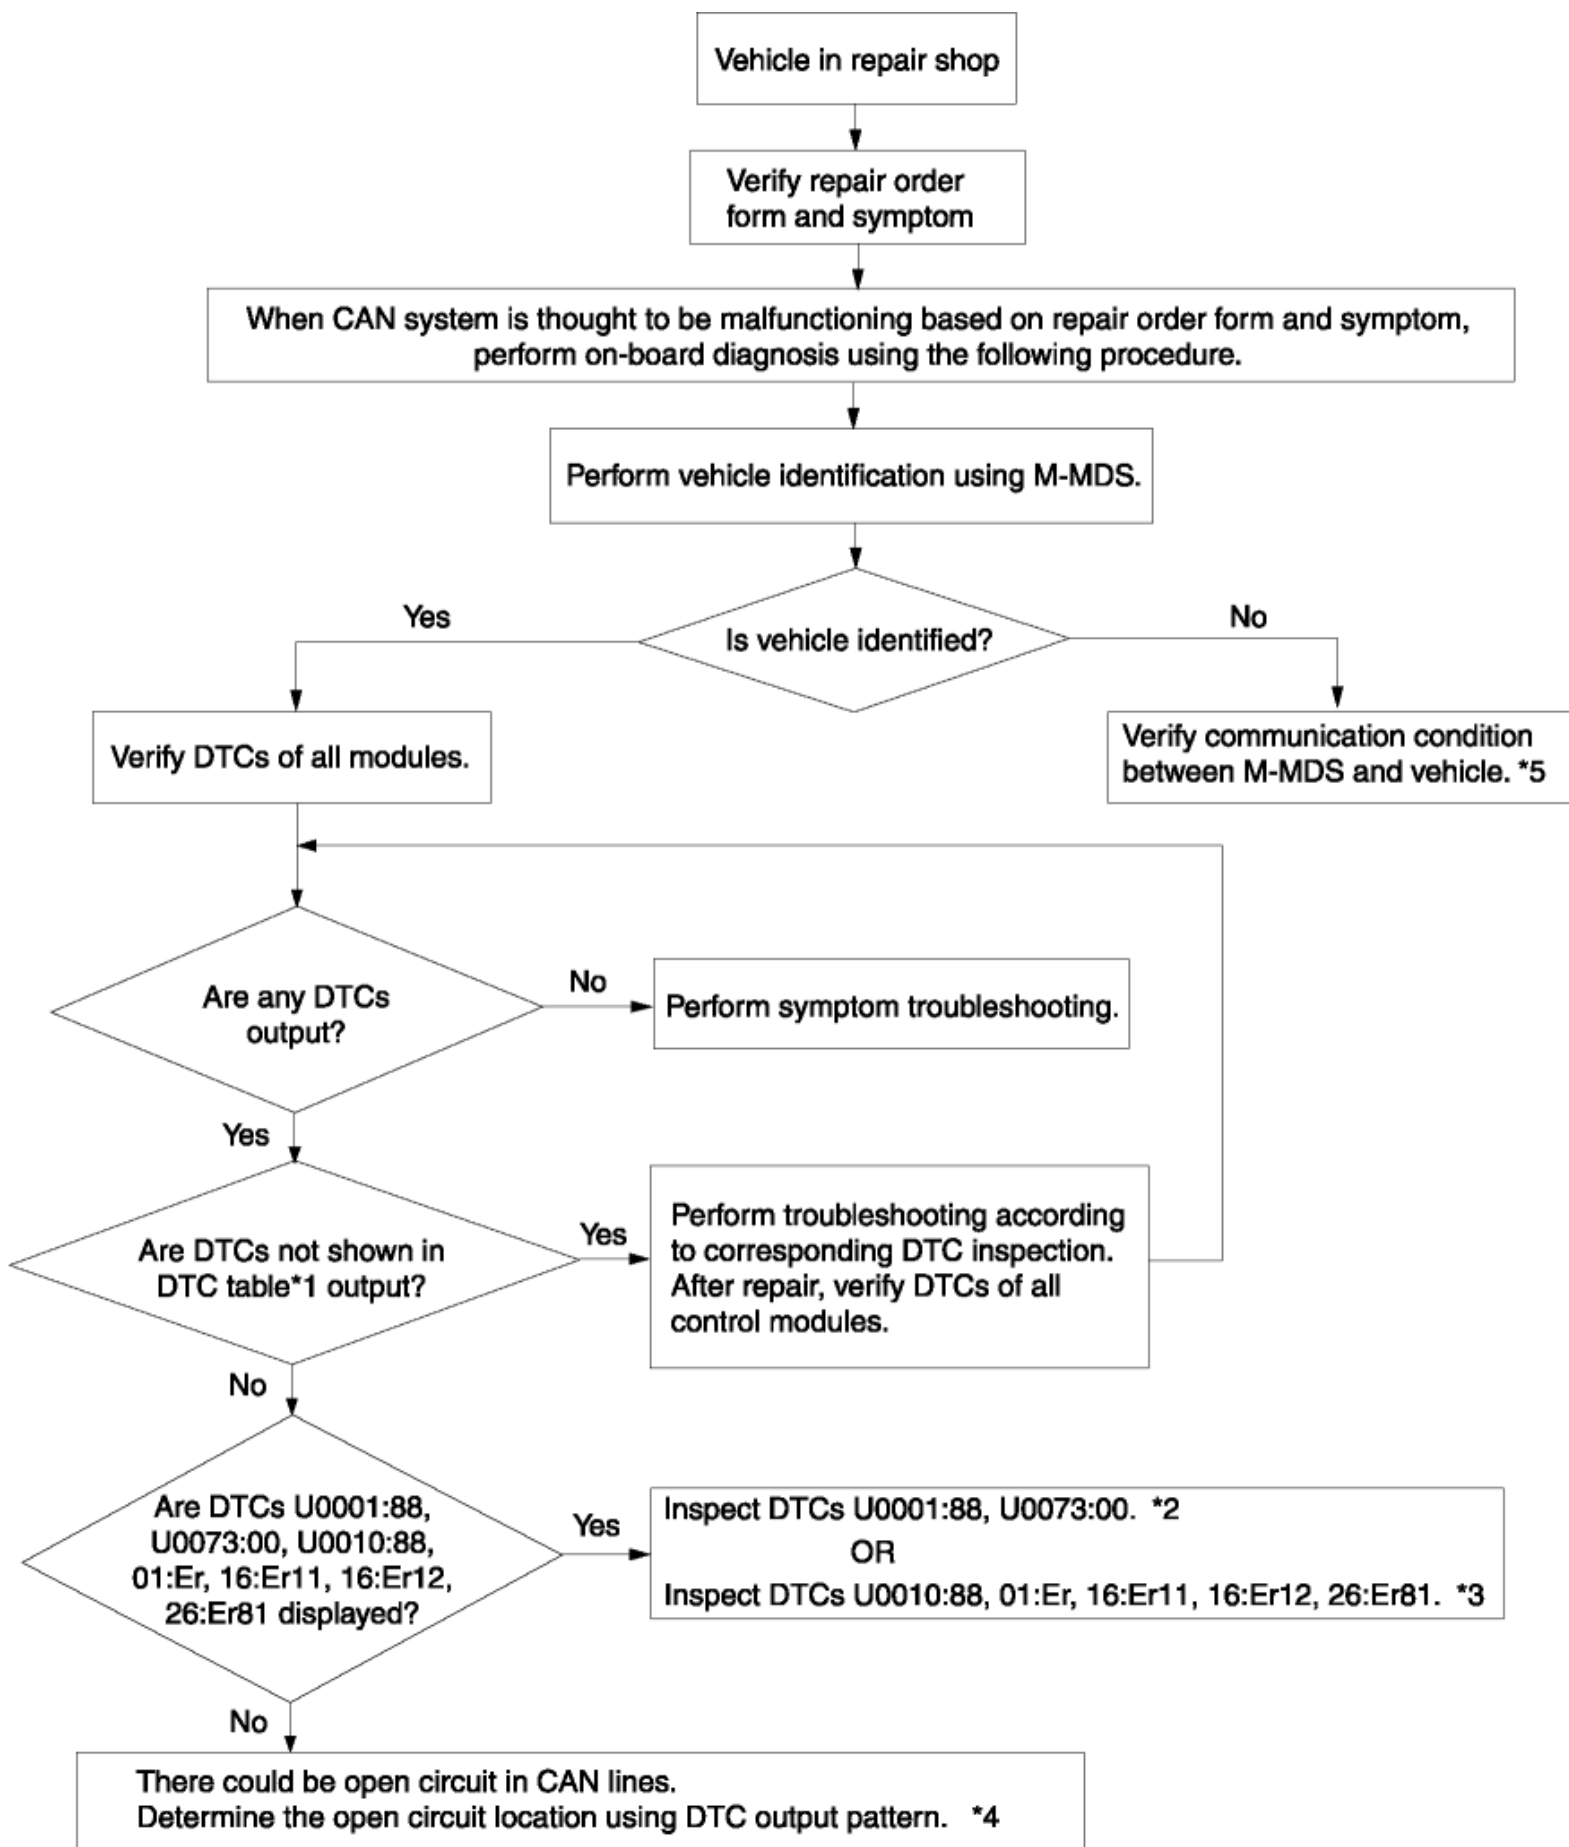

*1

DTC TABLE [MULTIPLEX COMMUNICATION SYSTEM]

*2

DTC U0001:88, U0073:00 [MULTI PLEX COMMUNICATION SYSTEM]

*3

DTC U0010:88, 01:Er, 16:Er11, 16:Er12, 26:Er81 [MULTI PLEX COMMUNICATION SYSTEM]

*4

DETERMINING MALFUNCTIONING PART (HS-CAN) [MULTI PLEX COMMUNICATION SYSTEM] / DETERMINING
MALFUNCTIONING PART (MS-CAN) [MULTI PLEX COMMUNICATION SYSTEM]

*5

M-MDS AND VEHICLE NOT COMMUNICATING [MULTI PLEX COMMUNICATION SYSTEM]

[< Previous](#) [Next >](#)

[Back to Top](#)

© 2012 Mazda North American Operations, U.S.A.