

2012 - Mazda6 - Body and Accessories


SUPPLIER IDENTIFICATION PROCEDURE [AUDIO]

NOTE:

- The supplier can vary with the unit. When asking the supplier (service center) for repair or replacement, identify the supplier and fill in the Audio Repair Order Form with the following procedures.

Identification Using the Label or Inscribed Lettering


1. Disconnect the negative battery cable.
2. Remove the following parts:
 - a. Upper panel (See [UPPER PANEL REMOVAL/ INSTALLATION.](#))
 - b. Decoration panel (See [DECORATION PANEL REMOVAL/ INSTALLATION.](#))
 - c. Shift knob (MTX) (See [MANUAL TRANSAXLE SHIFT MECHANISM REMOVAL/ INSTALLATION.](#))
 - d. Shift panel (See [SHIFT PANEL REMOVAL/ INSTALLATION.](#))
 - e. Center panel lower (See [CENTER PANEL LOWER REMOVAL/ INSTALLATION.](#))
 - f. Center panel upper (See [CENTER PANEL UPPER REMOVAL/ INSTALLATION.](#))
 - g. Climate control unit (See [CLIMATE CONTROL UNIT REMOVAL/ INSTALLATION \[FULL-AUTO AIR CONDITIONER\].](#)) (See [CLIMATE CONTROL UNIT REMOVAL/ INSTALLATION \[MANUAL AIR CONDITIONER\].](#))
 - h. Audio unit (See [AUDIO UNIT REMOVAL/ INSTALLATION.](#))
3. Verify the supplier by referring to the label attached to each unit.

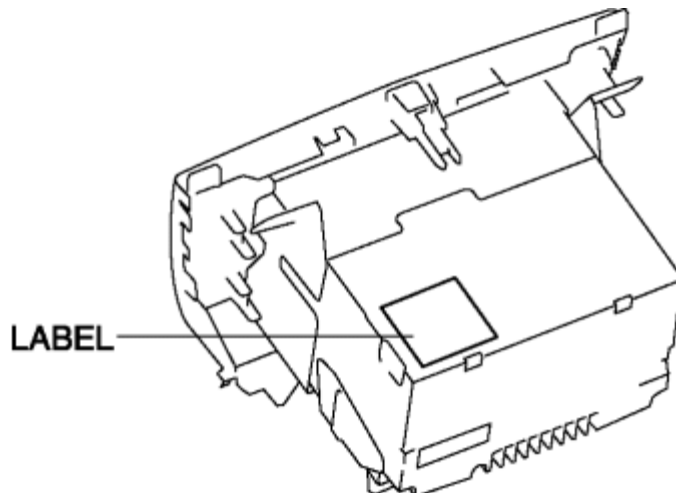


Verify Using the Diagnostic Assist Function

Without display

- 1. Switch the ignition to ACC or ON.
- 2. While pressing the POWER/VOLUME switch, simultaneously press the PRESET switch 5 for **3 s or more**.

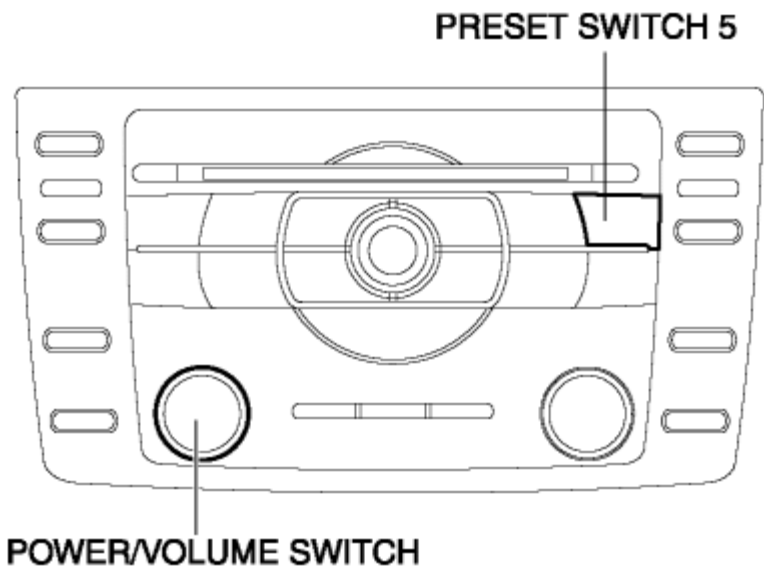


- 3. Identify the supplier code by referring to the information display.

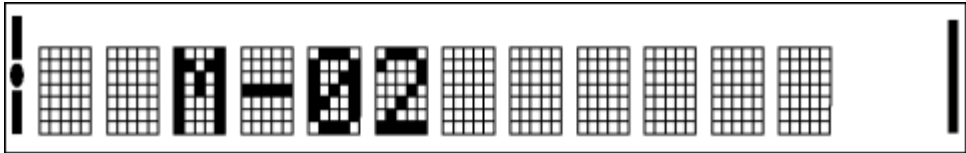

Supplier code	Supplier name
01	SANYO Automedia
02	Panasonic
03	Clarion
04	Pioneer
05	VISTEON

NOTE:


- The supplier code can also be identified from the DTC displays screen.

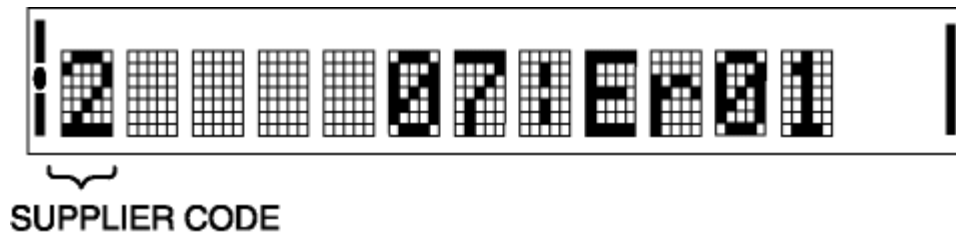


4. To stop the diagnostic assist function, ignition is switched to off.

With display

1. Switch the ignition to ACC or ON.
2. While pressing the POWER/VOLUME switch, simultaneously press the Selection switch 5 for **3 s or more**.

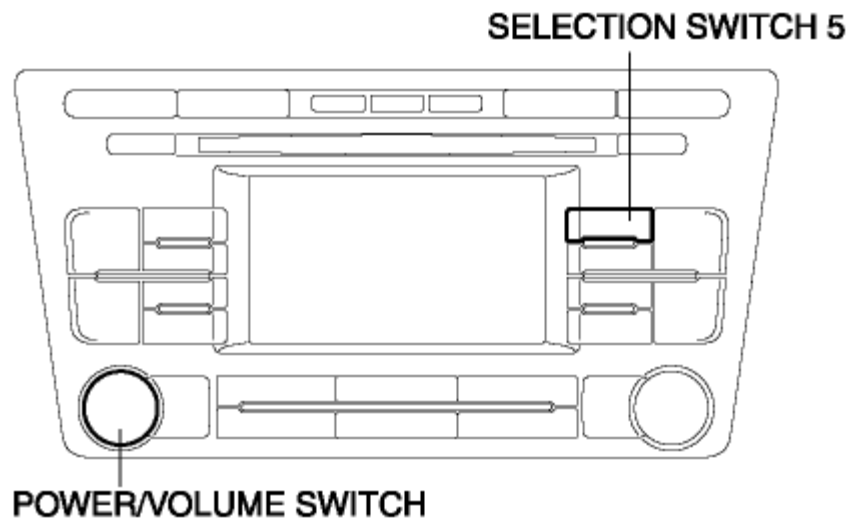

3. Identify the manufacture code by referring to the display.

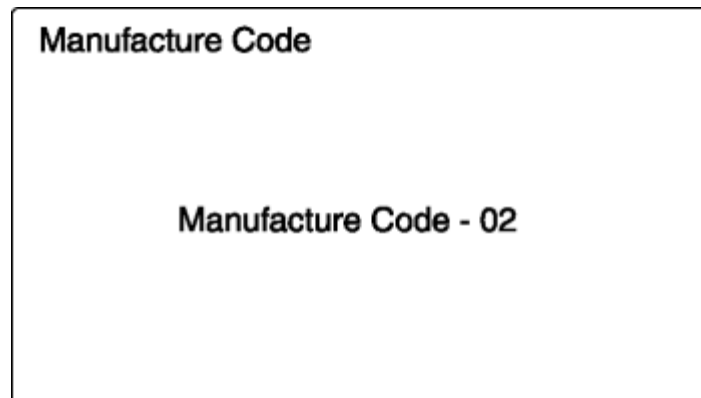

Manufacture code	Supplier name
01	SANYO Automeida

02	Panasonic
03	Clarion
04	Pioneer
05	VISTEON

NOTE:

- The manufacture code can also be identified from the DTC displays screen.

Error Code	
Manufacture Code 2	
Device Code	Error Code
09	20
22	10
22	01

4. To stop the diagnostic assist function, ignition is switched to off.

[< Previous](#) [Next >](#)

[Back to Top](#)

2012 - Mazda6 - Body and Accessories


SUPPLIER IDENTIFICATION PROCEDURE [AUDIO]

NOTE:

- The supplier can vary with the unit. When asking the supplier (service center) for repair or replacement, identify the supplier and fill in the Audio Repair Order Form with the following procedures.

Identification Using the Label or Inscribed Lettering


1. Disconnect the negative battery cable.
2. Remove the following parts:
 - a. Upper panel (See [UPPER PANEL REMOVAL/ INSTALLATION.](#))
 - b. Decoration panel (See [DECORATION PANEL REMOVAL/ INSTALLATION.](#))
 - c. Shift knob (MTX) (See [MANUAL TRANSAXLE SHIFT MECHANISM REMOVAL/ INSTALLATION.](#))
 - d. Shift panel (See [SHIFT PANEL REMOVAL/ INSTALLATION.](#))
 - e. Center panel lower (See [CENTER PANEL LOWER REMOVAL/ INSTALLATION.](#))
 - f. Center panel upper (See [CENTER PANEL UPPER REMOVAL/ INSTALLATION.](#))
 - g. Climate control unit (See [CLIMATE CONTROL UNIT REMOVAL/ INSTALLATION \[FULL-AUTO AIR CONDITIONER\].](#)) (See [CLIMATE CONTROL UNIT REMOVAL/ INSTALLATION \[MANUAL AIR CONDITIONER\].](#))
 - h. Audio unit (See [AUDIO UNIT REMOVAL/ INSTALLATION.](#))
3. Verify the supplier by referring to the label attached to each unit.

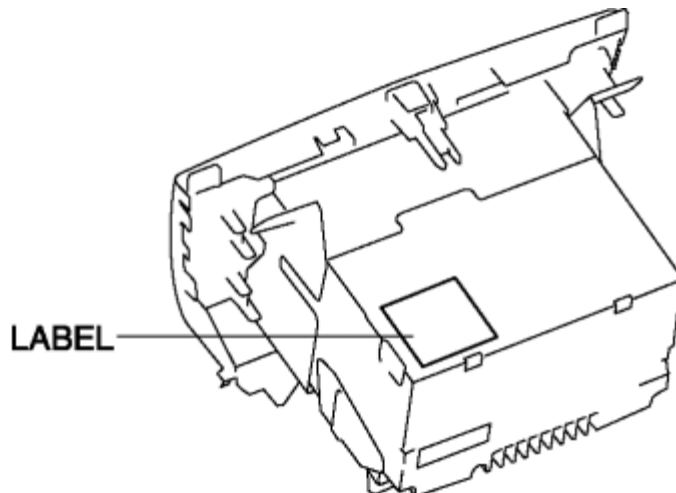


Verify Using the Diagnostic Assist Function

Without display

- 1. Switch the ignition to ACC or ON.
- 2. While pressing the POWER/VOLUME switch, simultaneously press the PRESET switch 5 for **3 s or more**.

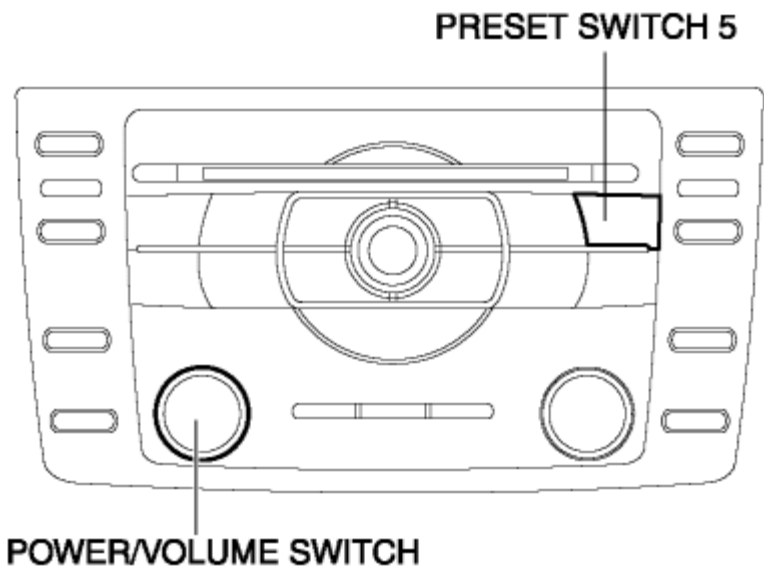


- 3. Identify the supplier code by referring to the information display.

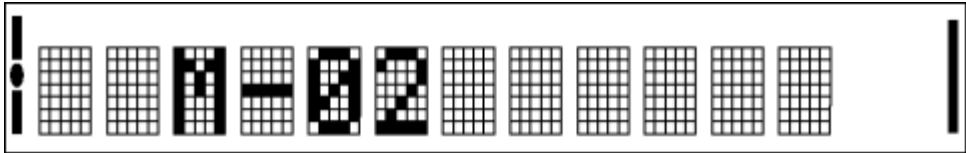

Supplier code	Supplier name
01	SANYO Automedia
02	Panasonic
03	Clarion
04	Pioneer
05	VISTEON

NOTE:


- The supplier code can also be identified from the DTC displays screen.

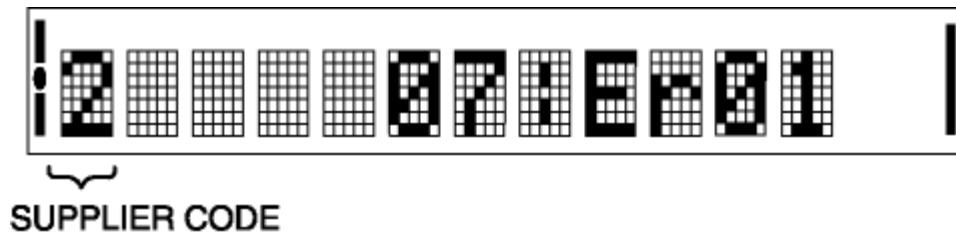


4. To stop the diagnostic assist function, ignition is switched to off.

With display

1. Switch the ignition to ACC or ON.
2. While pressing the POWER/VOLUME switch, simultaneously press the Selection switch 5 for **3 s or more**.

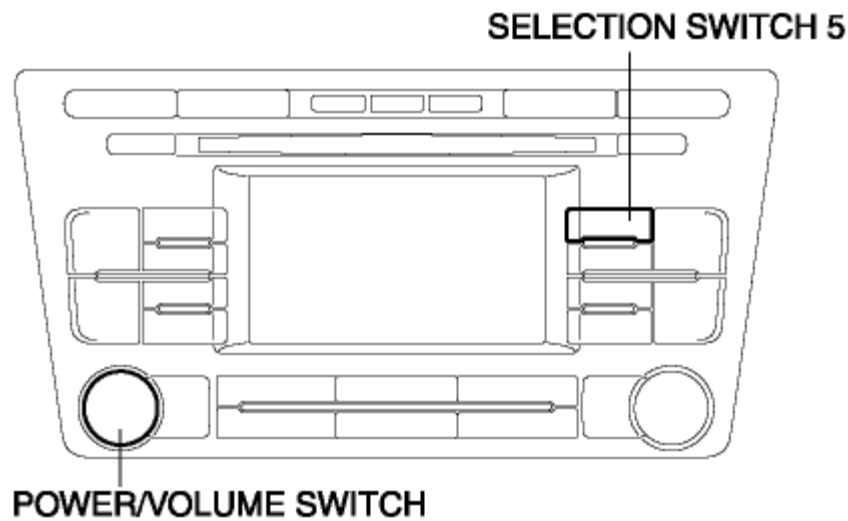

3. Identify the manufacture code by referring to the display.

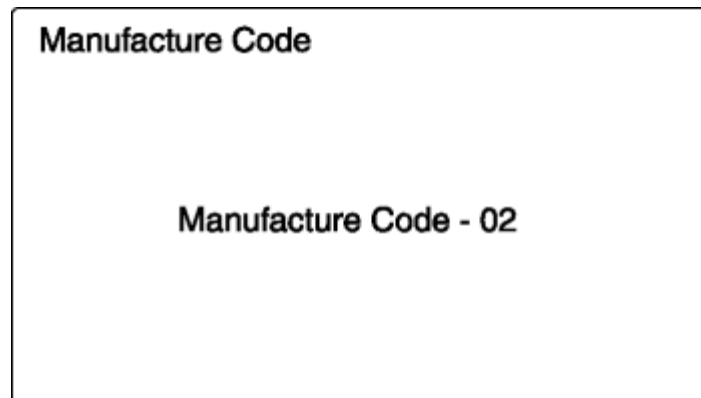

Manufacture code	Supplier name
01	SANYO Automedia

02	Panasonic
03	Clarion
04	Pioneer
05	VISTEON

NOTE:

- The manufacture code can also be identified from the DTC displays screen.

Error Code	
Manufacture Code 2	
Device Code	Error Code
09	20
22	10
22	01

4. To stop the diagnostic assist function, ignition is switched to off.

[< Previous](#) [Next >](#)

[Back to Top](#)