


2012 - Mazda6 - Body and Accessories

STARTING PROCEDURE FOR ON-BOARD DIAGNOSTIC TEST MODE [CAR-NAVIGATION SYSTEM]

NOTE:

- All DTCs displayed in the on-board diagnostic test mode should be entered in the Audio Repair Order Form.
1. Switch the ignition to ACC or ON.
 2. Turn the audio power to ON.
 3. While pressing the POWER/VOLUME switch, simultaneously press the TUNE/AUDIO switch and the DISPLAY switch for **0.2 s or more**.

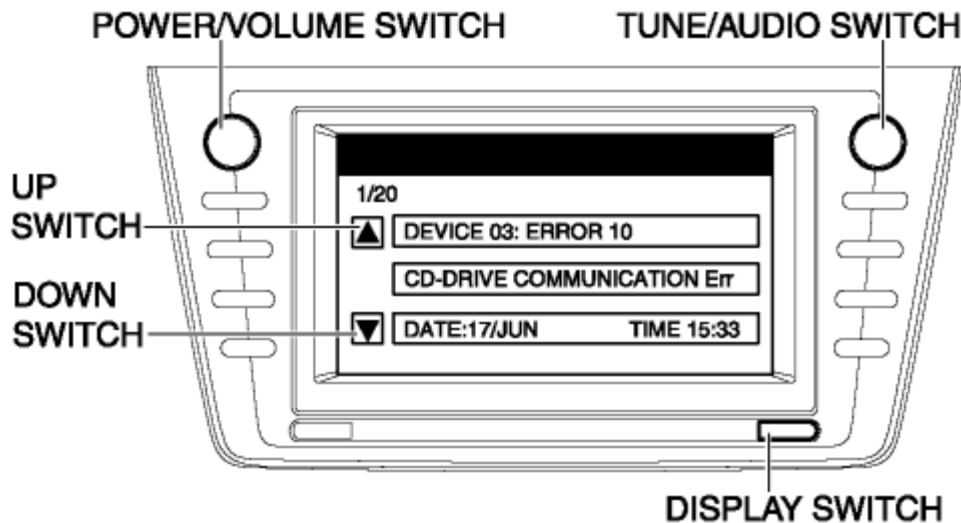

NOTE:


- If several DTCs are in the memory, they can be displayed using the UP/DOWN switch.
4. To stop the on-board diagnostic test mode, ignition is switched to off.

2012 - Mazda6 - Body and Accessories

STARTING PROCEDURE FOR ON-BOARD DIAGNOSTIC TEST MODE [CAR-NAVIGATION SYSTEM]

NOTE:

- All DTCs displayed in the on-board diagnostic test mode should be entered in the Audio Repair Order Form.
1. Switch the ignition to ACC or ON.
 2. Turn the audio power to ON.
 3. While pressing the POWER/VOLUME switch, simultaneously press the TUNE/AUDIO switch and the DISPLAY switch for **0.2 s or more**.

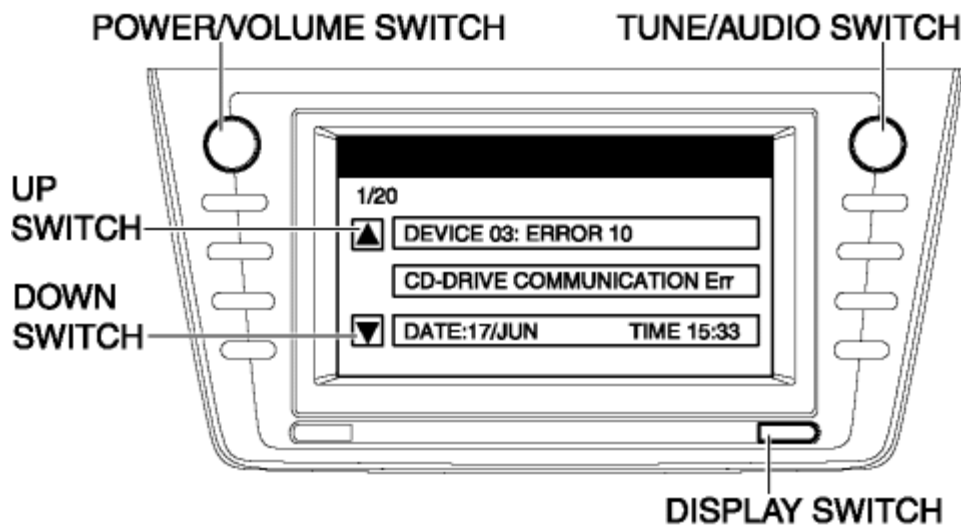

NOTE:

- If several DTCs are in the memory, they can be displayed using the UP/DOWN switch.
4. To stop the on-board diagnostic test mode, ignition is switched to off.