

2012 - Mazda6 - General Information

JACKING POSITIONS, VEHICLE LIFT (2 SUPPORTS) AND SAFETY STAND (RIGID RACK) POSITIONS

Jacking Positions

WARNING:

- Improperly jacking a vehicle is dangerous. The vehicle can slip off the jack and cause serious injury. Use only the correct front and rear jacking points and block the wheels.
- Use safety stands to support the vehicle after it has been lifted.


Front

NOTE:

- To prevent obstruction between the jack body and front bumper when the jack body is inserted, use a low-floor type jack.
- Near the center of the front crossmember.

Rear

- Near the center of the rear crossmember.

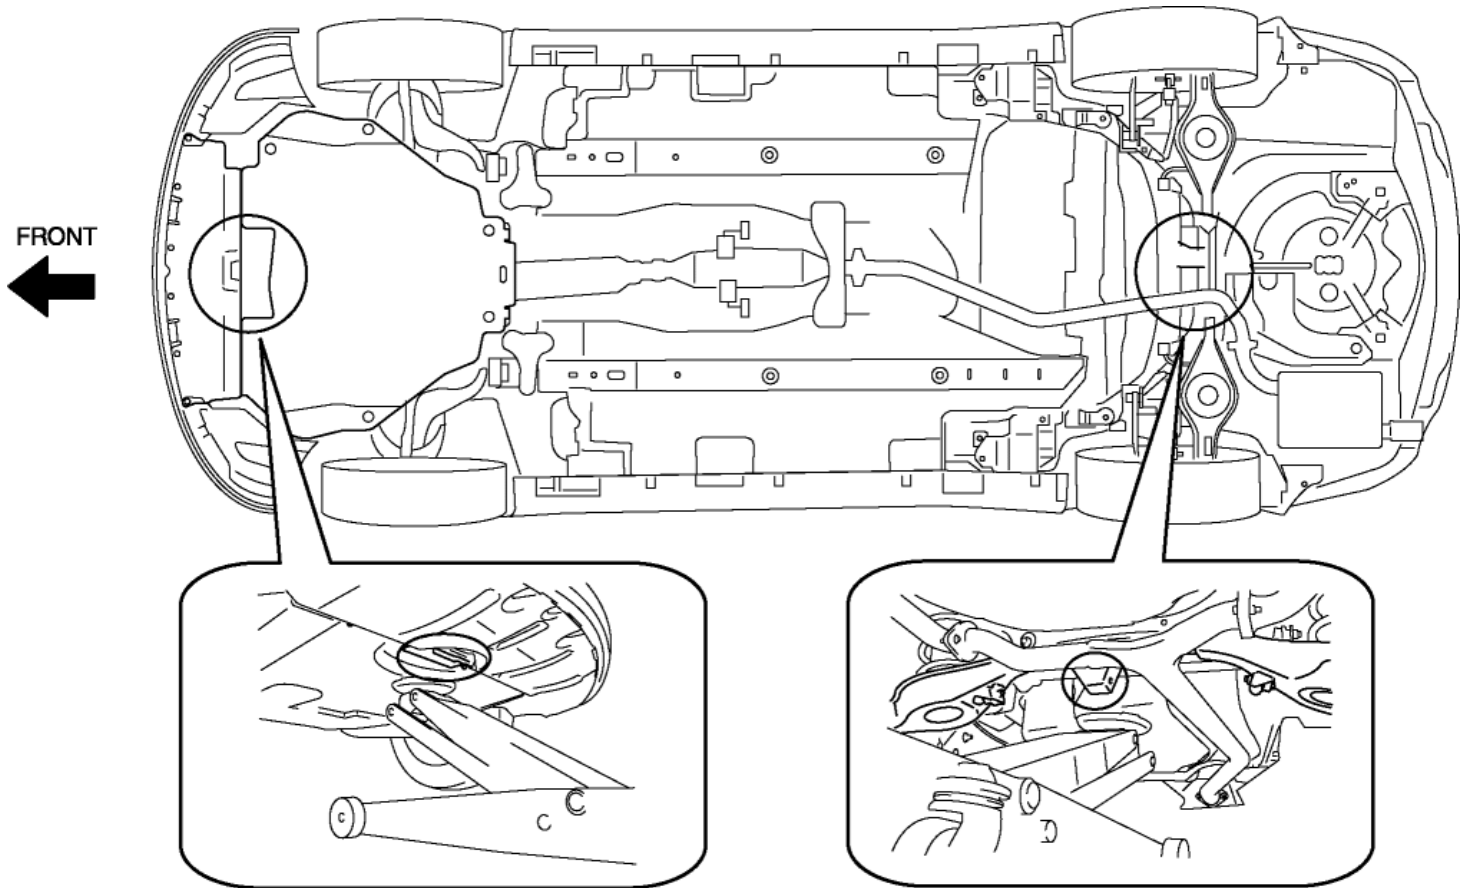

Vehicle Lift Positions, Safety Stand Positions


Front and rear

WARNING:

- Lifting a vehicle that is not stabilized is dangerous. The vehicle can slip off the lift and cause serious injury and/or vehicle damage. Make sure that the vehicle is on the lift horizontally by adjusting the height of the support at the end of the arm of the lift.

CAUTION:

- For vehicles with side step molding, be careful not to damage the side step molding by hitting it with auto-lift arms or a safety stand.
- Both sides of the vehicle, on side sills.

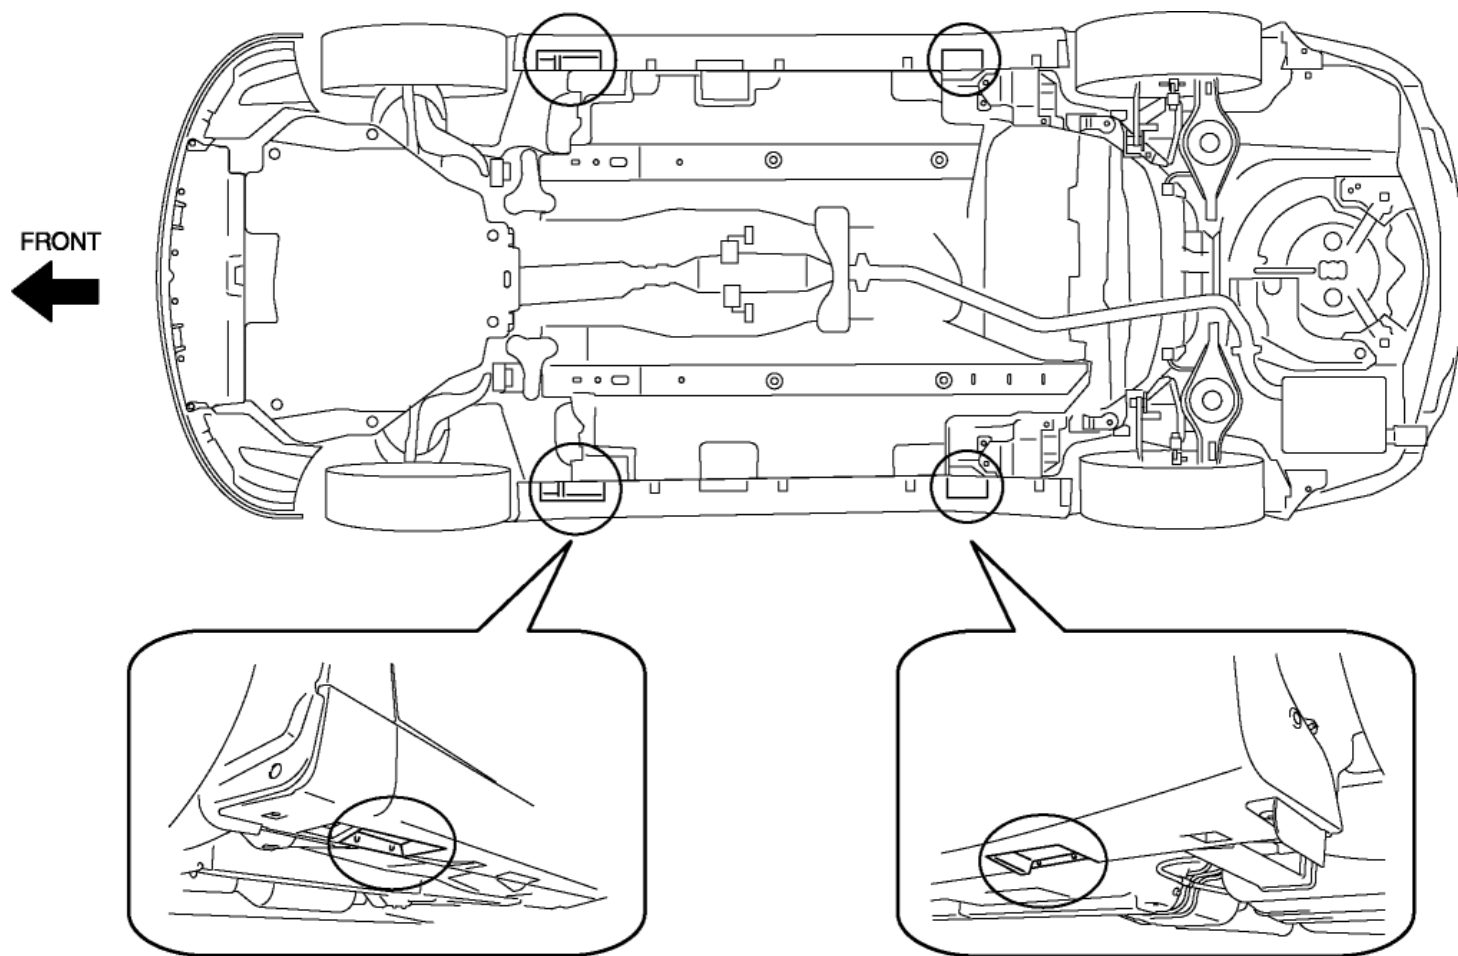

2012 - Mazda6 - General Information

JACKING POSITIONS, VEHICLE LIFT (2 SUPPORTS) AND SAFETY STAND (RIGID RACK) POSITIONS

Jacking Positions

WARNING:

- Improperly jacking a vehicle is dangerous. The vehicle can slip off the jack and cause serious injury. Use only the correct front and rear jacking points and block the wheels.
- Use safety stands to support the vehicle after it has been lifted.


Front

NOTE:

- To prevent obstruction between the jack body and front bumper when the jack body is inserted, use a low-floor type jack.
- Near the center of the front crossmember.

Rear

- Near the center of the rear crossmember.

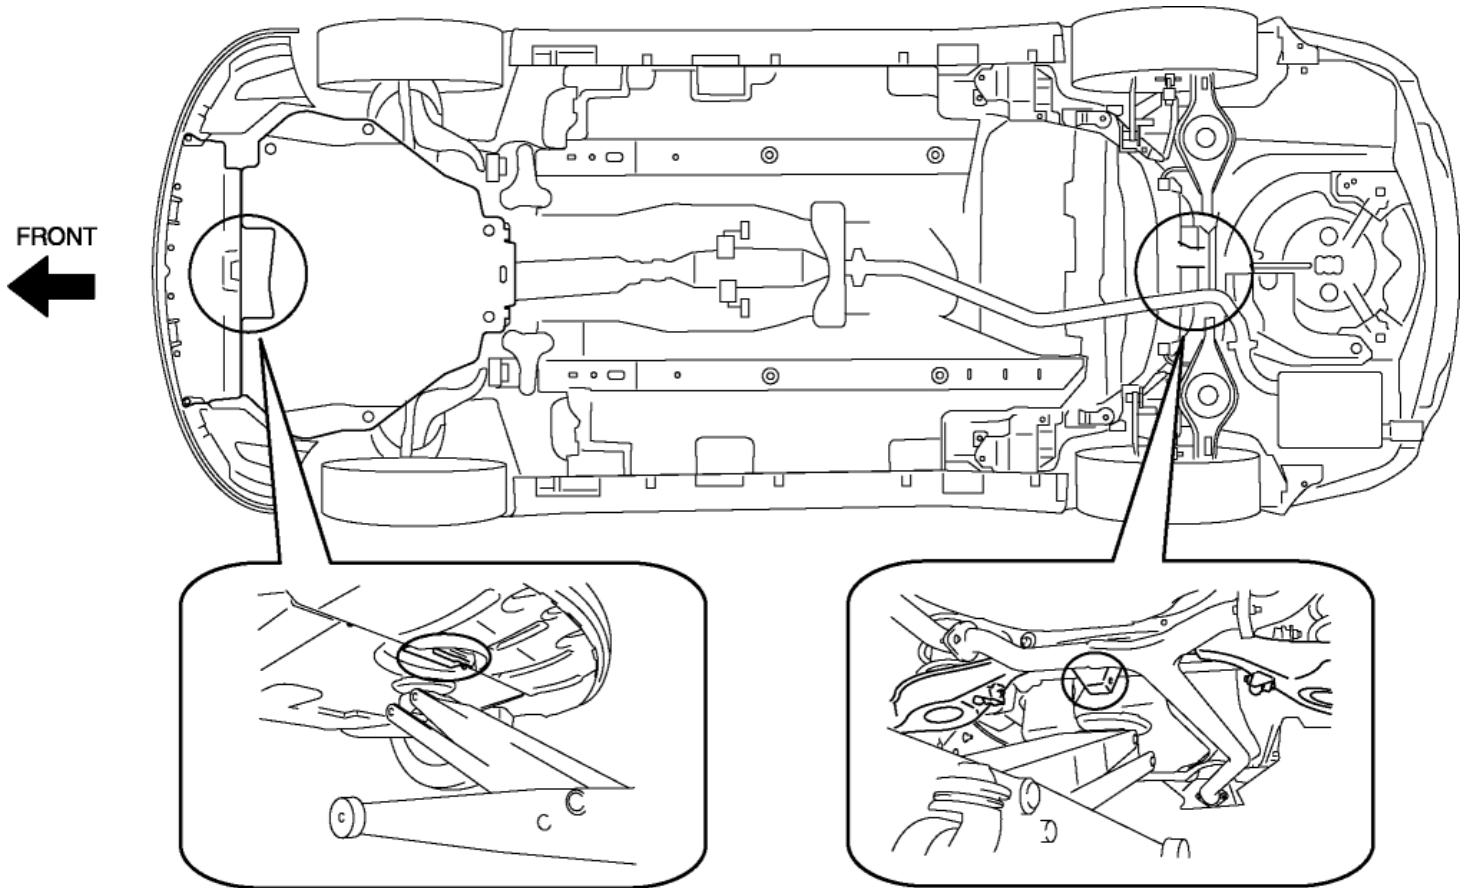

Vehicle Lift Positions, Safety Stand Positions

Front and rear

WARNING:

- Lifting a vehicle that is not stabilized is dangerous. The vehicle can slip off the lift and cause serious injury and/or vehicle damage. Make sure that the vehicle is on the lift horizontally by adjusting the height of the support at the end of the arm of the lift.

CAUTION:

- For vehicles with side step molding, be careful not to damage the side step molding by hitting it with auto-lift arms or a safety stand.
- Both sides of the vehicle, on side sills.

