


2012 - Mazda6 - Suspension

REAR SHOCK ABSORBER REMOVAL/ INSTALLATION


1. Support the rear axle component using a jack.

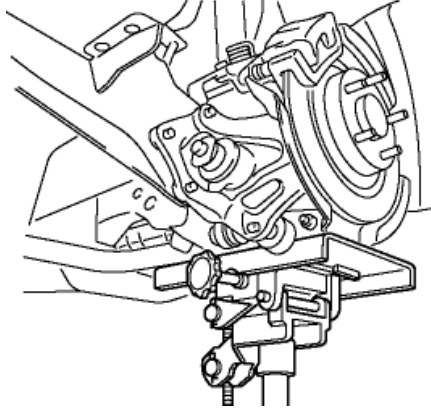

2. Remove the rear shock absorber.


120—163
{13—16, 89—120}

76—102
{7.8—10, 57—75}

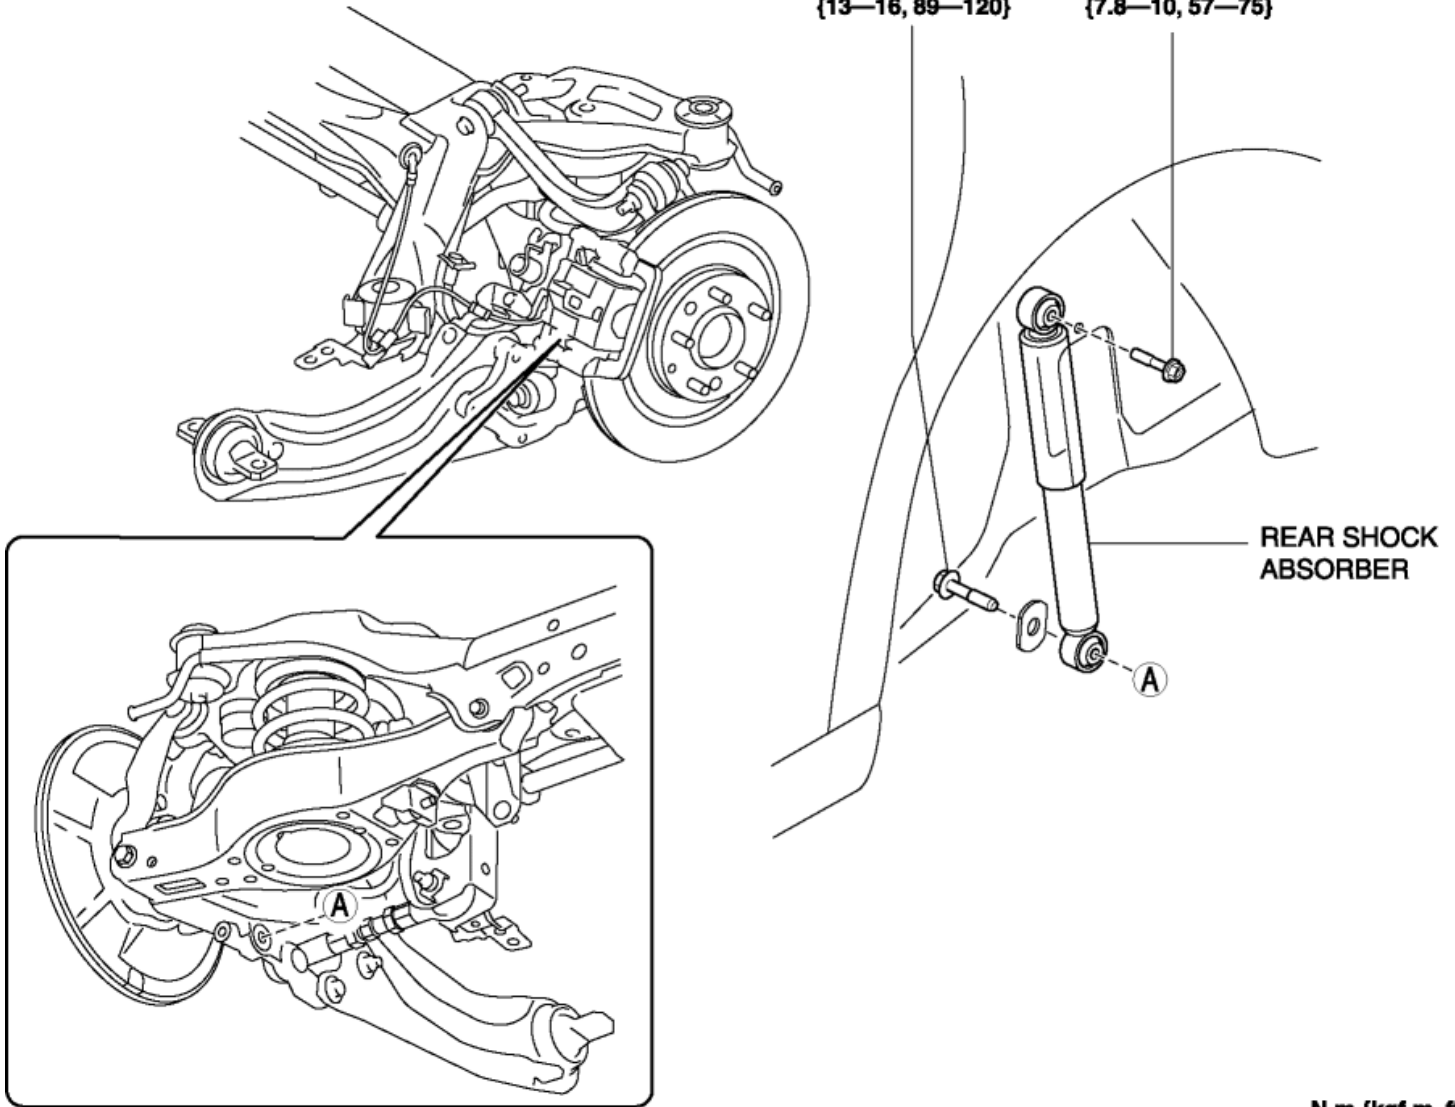

N·m {kgf·m, ft·lbf}


3. Temporarily install the rear shock absorber.
4. Tighten the rear shock absorber upper side to the specified torque.
5. Tighten the rear shock absorber lower side bolt to the specified torque using an adjustable wrench while holding the washer in place.

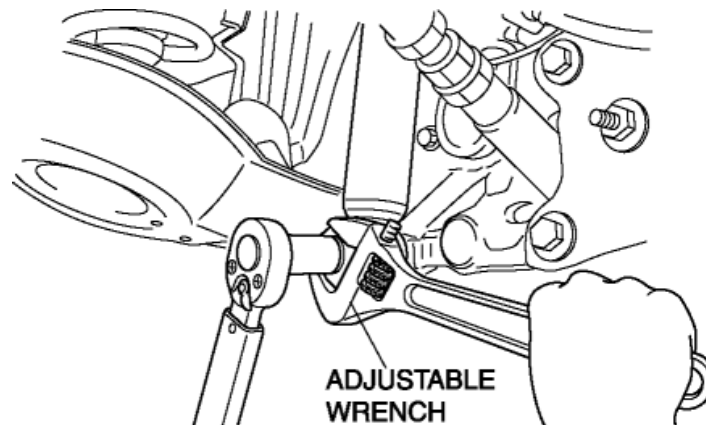

2012 - Mazda6 - Suspension

REAR SHOCK ABSORBER REMOVAL/ INSTALLATION


1. Support the rear axle component using a jack.

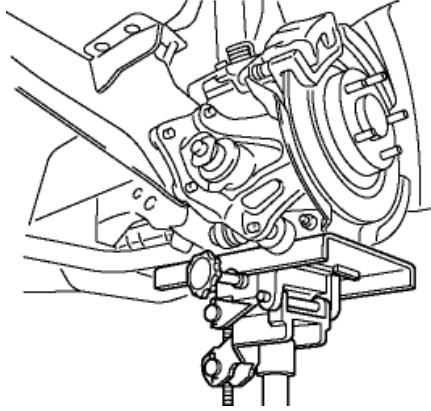

2. Remove the rear shock absorber.

120—163
{13—16, 89—120}

76—102
{7.8—10, 57—75}

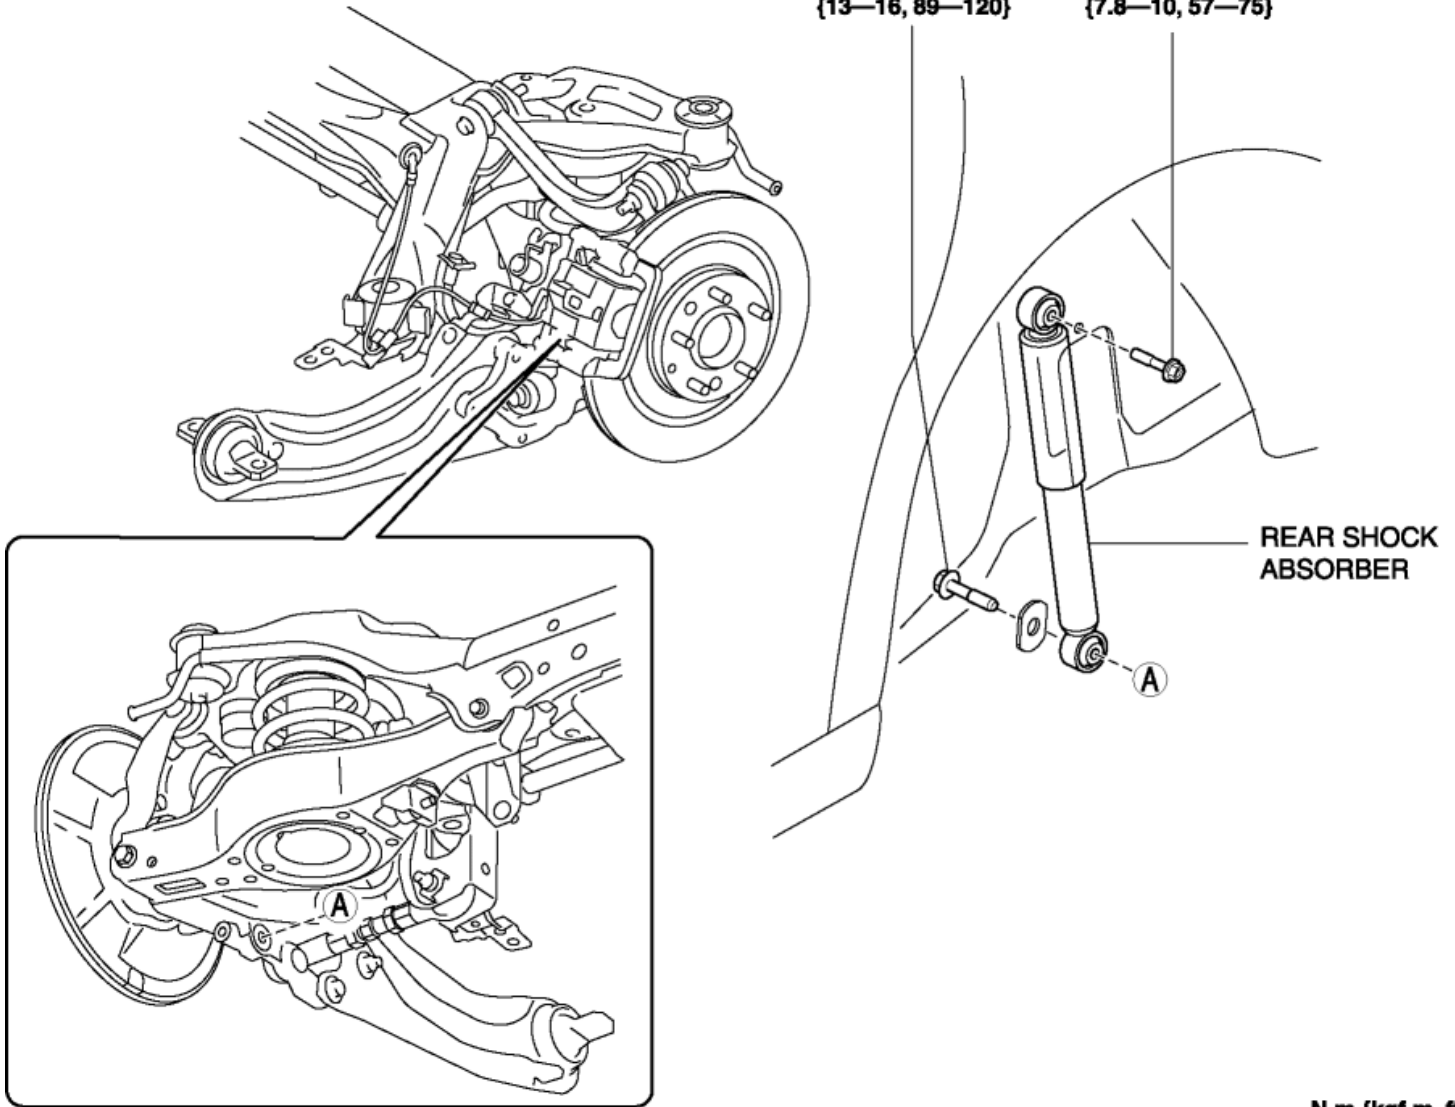

N·m {kgf·m, ft·lbf}

3. Temporarily install the rear shock absorber.
4. Tighten the rear shock absorber upper side to the specified torque.
5. Tighten the rear shock absorber lower side bolt to the specified torque using an adjustable wrench while holding the washer in place.

