


2012 - Mazda6 - Brakes

FRONT ABS WHEEL-SPEED SENSOR REMOVAL/ INSTALLATION

- 1. Remove in the order indicated in the table.
- 2. Install in the reverse order of removal.
- 3. After installation, verify that there is no twisting in the ABS wheel-speed sensor.

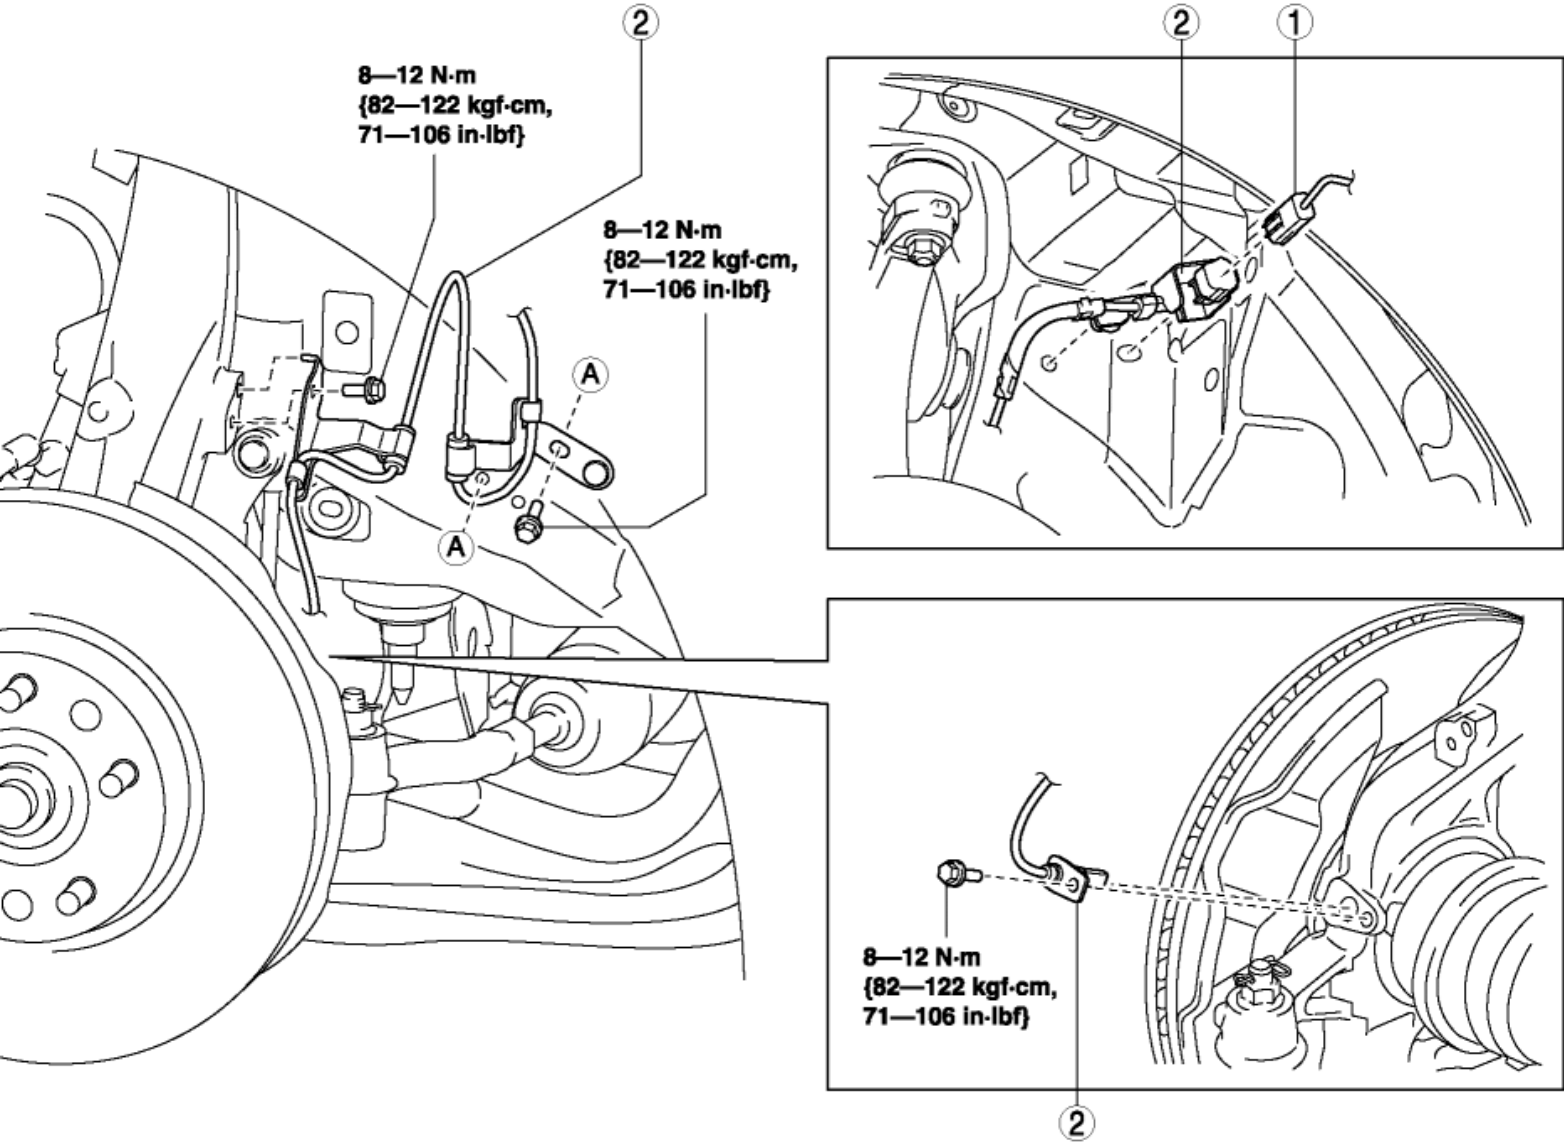

1	Connector
	(See Connector Removal Note.)
2	Front ABS wheel-speed sensor

Connector Removal Note

1. Pull aside the mudguard and disconnect the connector.

[< Previous](#) [Next >](#)


© 2011 Mazda North American Operations, U.S.A.

[Back to Top](#)

2012 - Mazda6 - Brakes

FRONT ABS WHEEL-SPEED SENSOR REMOVAL/ INSTALLATION

- 1. Remove in the order indicated in the table.
- 2. Install in the reverse order of removal.
- 3. After installation, verify that there is no twisting in the ABS wheel-speed sensor.

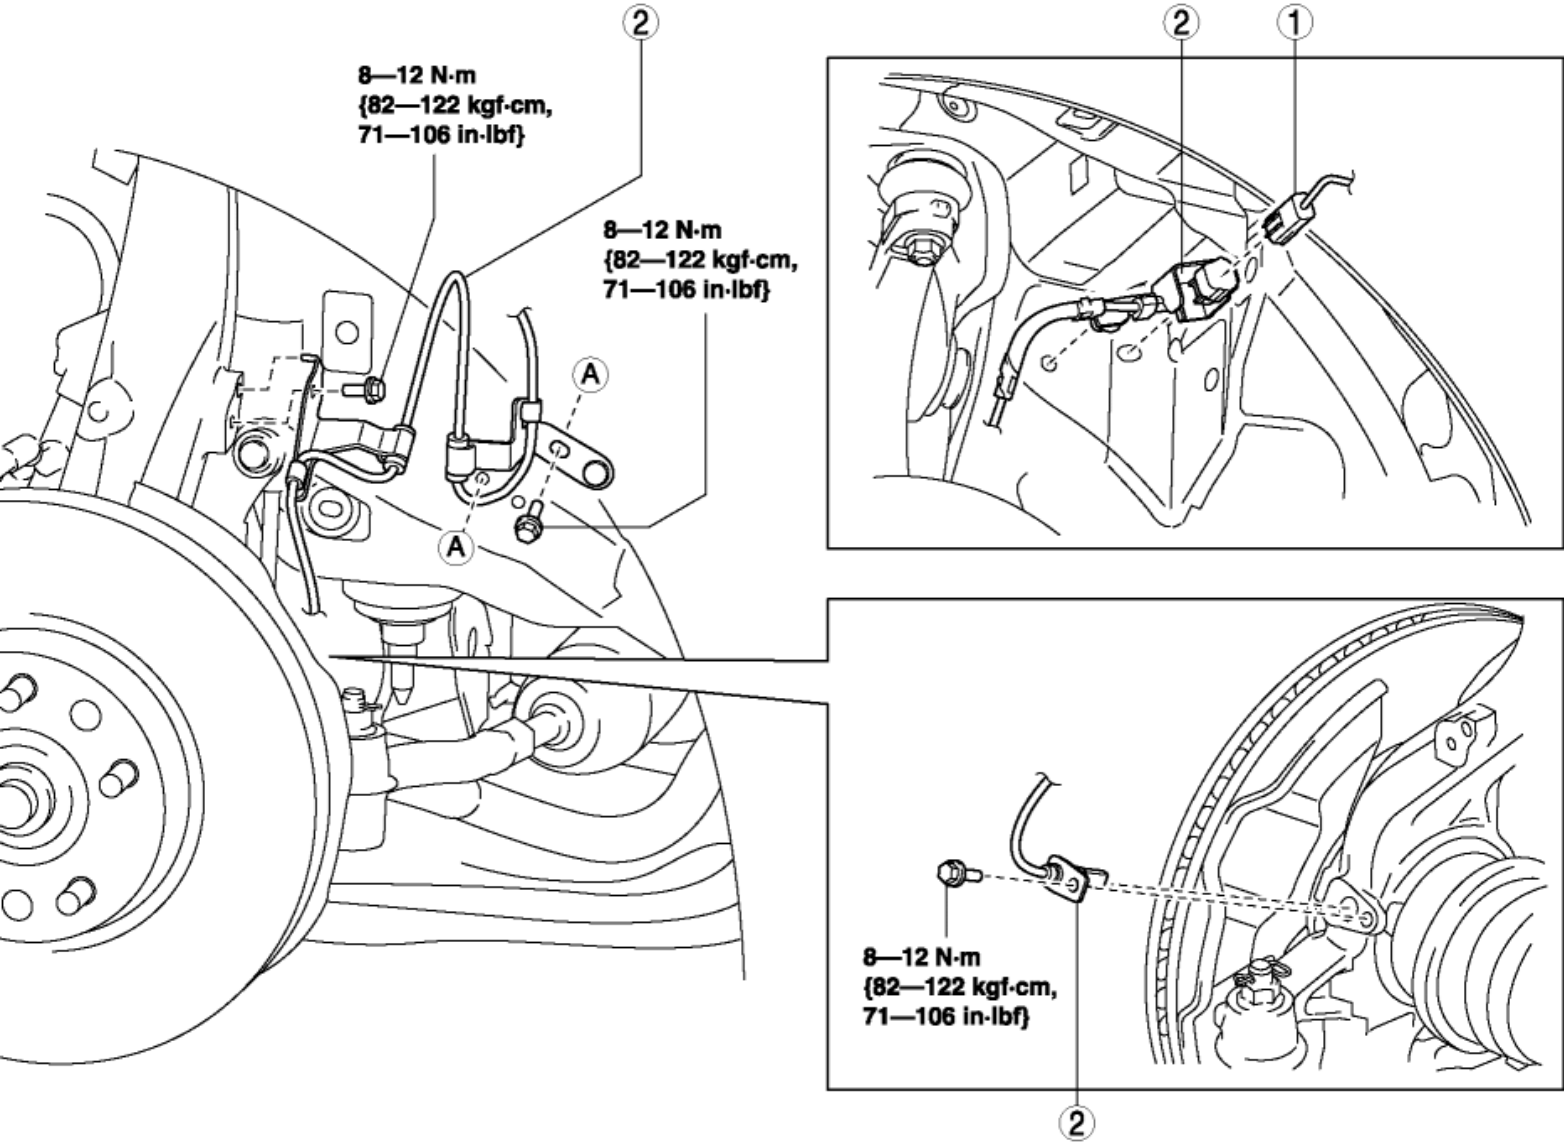

1	Connector
	(See Connector Removal Note.)
2	Front ABS wheel-speed sensor

Connector Removal Note

1. Pull aside the mudguard and disconnect the connector.

[< Previous](#) [Next >](#)

© 2011 Mazda North American Operations, U.S.A.

[Back to Top](#)