


2012 - Mazda6 - Body and Accessories

REAR PACKAGE TRIM REMOVAL/ INSTALLATION

1. Remove the following parts:
 - a. High-mount brake light (See [HIGH-MOUNT BRAKE LIGHT REMOVAL/ INSTALLATION.](#))
 - b. Rear side seat back (See [REAR SIDE SEAT BACK REMOVAL/ INSTALLATION.](#))
 - c. C-pillar trim (See [C-PILLAR TRIM REMOVAL/ INSTALLATION.](#))
 - d. Rear seat cushion (See [REAR SEAT CUSHION REMOVAL/ INSTALLATION.](#))
2. Fold the rear seat back.
3. Remove the fastener A.

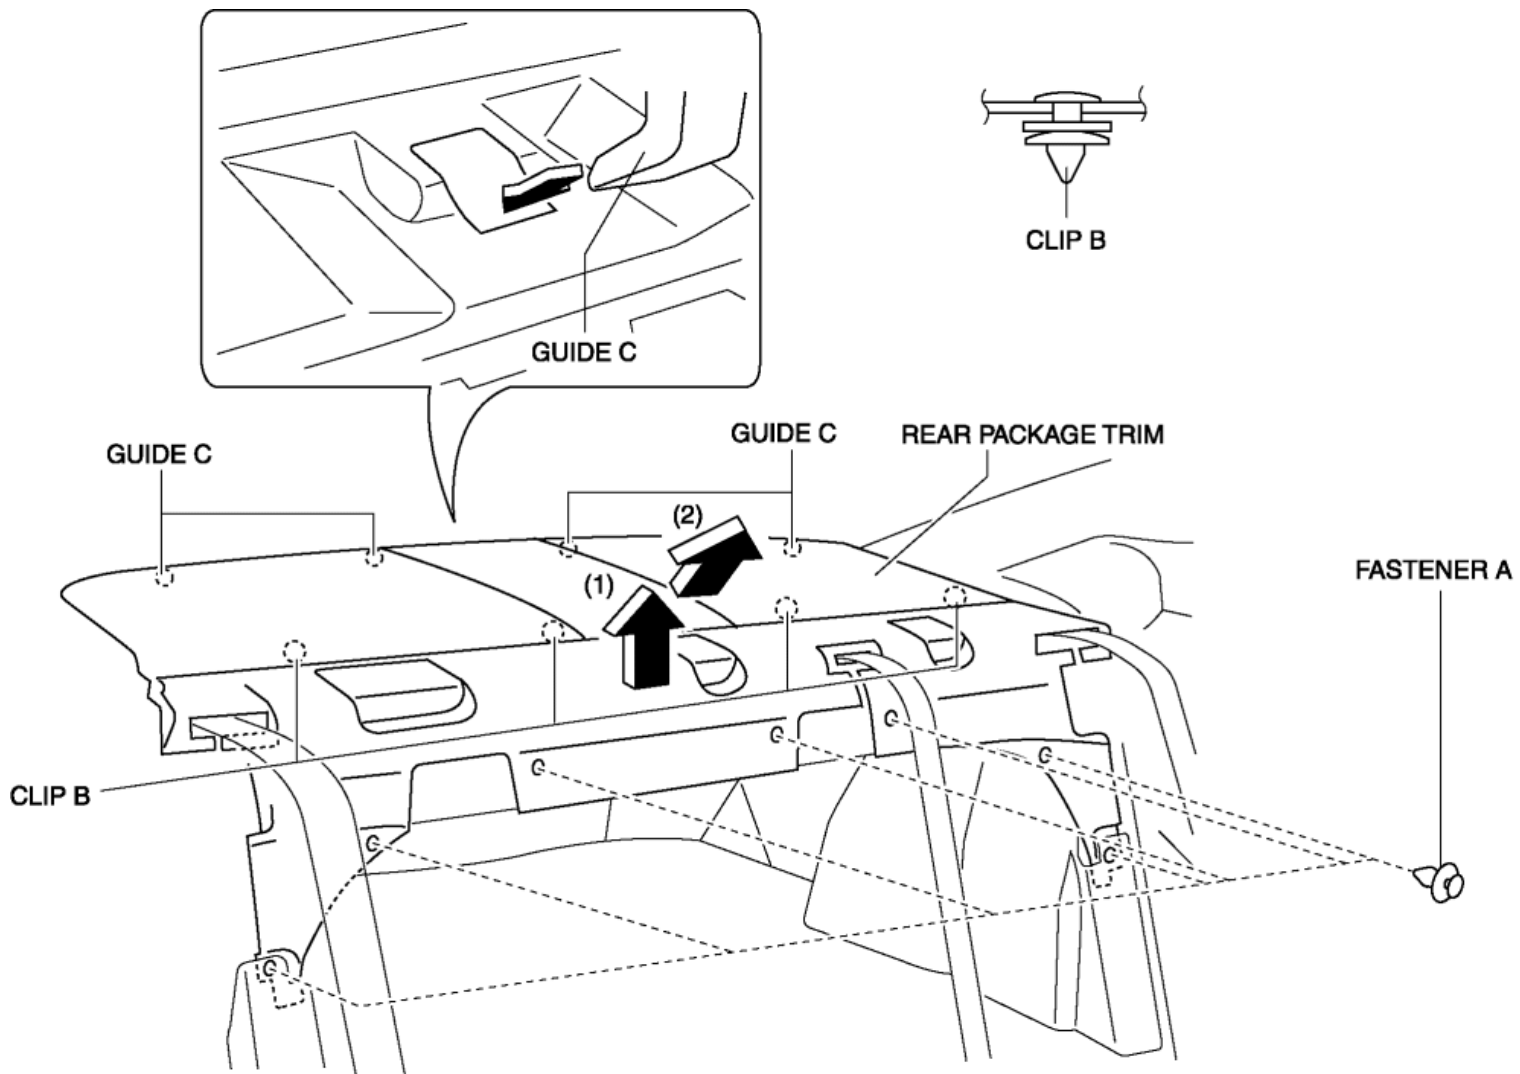


4. Pull up the rear package trim in the direction of the arrow (1) shown in the figure to remove the clips B, pull the rear package trim in the direction of the arrow (2), and remove it while pulling out the guides C.
5. Remove the rear package trim.
6. Install in the reverse order of removal.

2012 - Mazda6 - Body and Accessories

REAR PACKAGE TRIM REMOVAL/ INSTALLATION

1. Remove the following parts:
 - a. High-mount brake light (See [HIGH-MOUNT BRAKE LIGHT REMOVAL/ INSTALLATION.](#))
 - b. Rear side seat back (See [REAR SIDE SEAT BACK REMOVAL/ INSTALLATION.](#))
 - c. C-pillar trim (See [C-PILLAR TRIM REMOVAL/ INSTALLATION.](#))
 - d. Rear seat cushion (See [REAR SEAT CUSHION REMOVAL/ INSTALLATION.](#))
2. Fold the rear seat back.
3. Remove the fastener A.

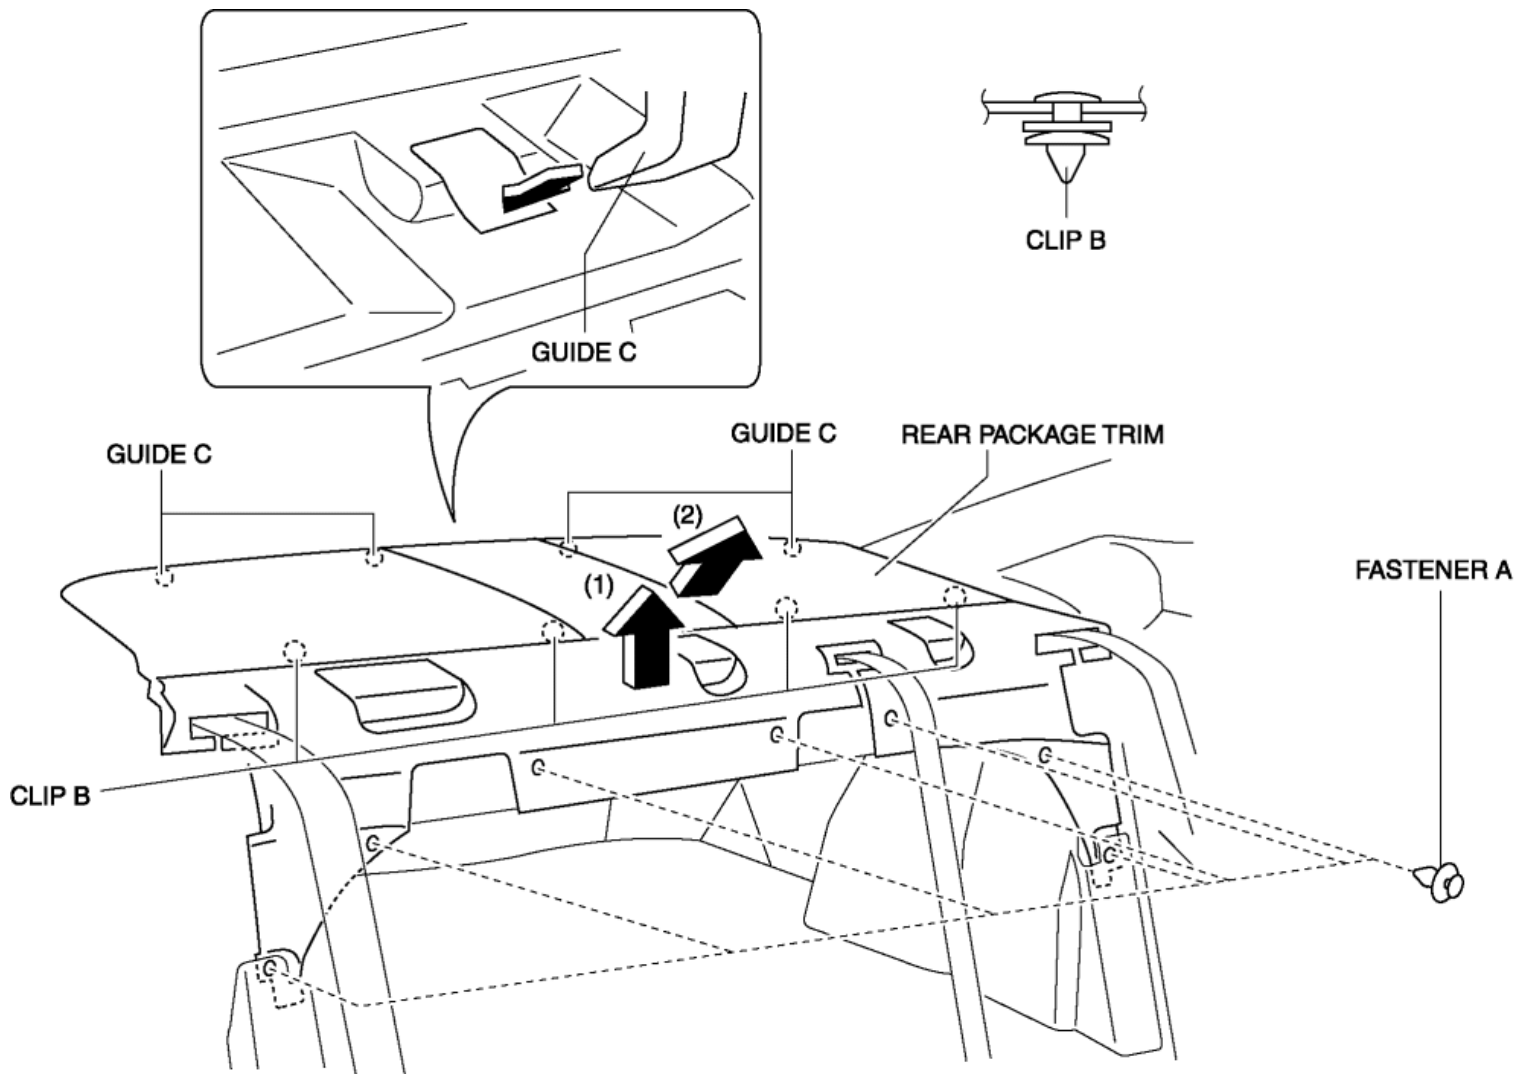

4. Pull up the rear package trim in the direction of the arrow (1) shown in the figure to remove the clips B, pull the rear package trim in the direction of the arrow (2), and remove it while pulling out the guides C.
5. Remove the rear package trim.
6. Install in the reverse order of removal.

