


2012 - Mazda6 - Body and Accessories

KNEE BOLSTER REMOVAL/ INSTALLATION

1. Disconnect the negative battery cable.
2. Remove the following parts:
 - a. Driver-side front scuff plate (See [FRONT SCUFF PLATE REMOVAL/ INSTALLATION.](#))
 - b. Drive-side front side trim (See [FRONT SIDE TRIM REMOVAL/ INSTALLATION.](#))
 - c. Upper panel (See [UPPER PANEL REMOVAL/ INSTALLATION.](#))
 - d. Drive-side decoration panel (See [DECORATION PANEL REMOVAL/ INSTALLATION.](#))
 - e. Hood release lever (See [HOOD LATCH AND RELEASE LEVER REMOVAL/ INSTALLATION.](#))
 - f. Meter hood (See [METER HOOD REMOVAL/ INSTALLATION.](#))
 - g. Drive-side lower panel (See [LOWER PANEL REMOVAL/ INSTALLATION.](#))
3. Remove the bolts.

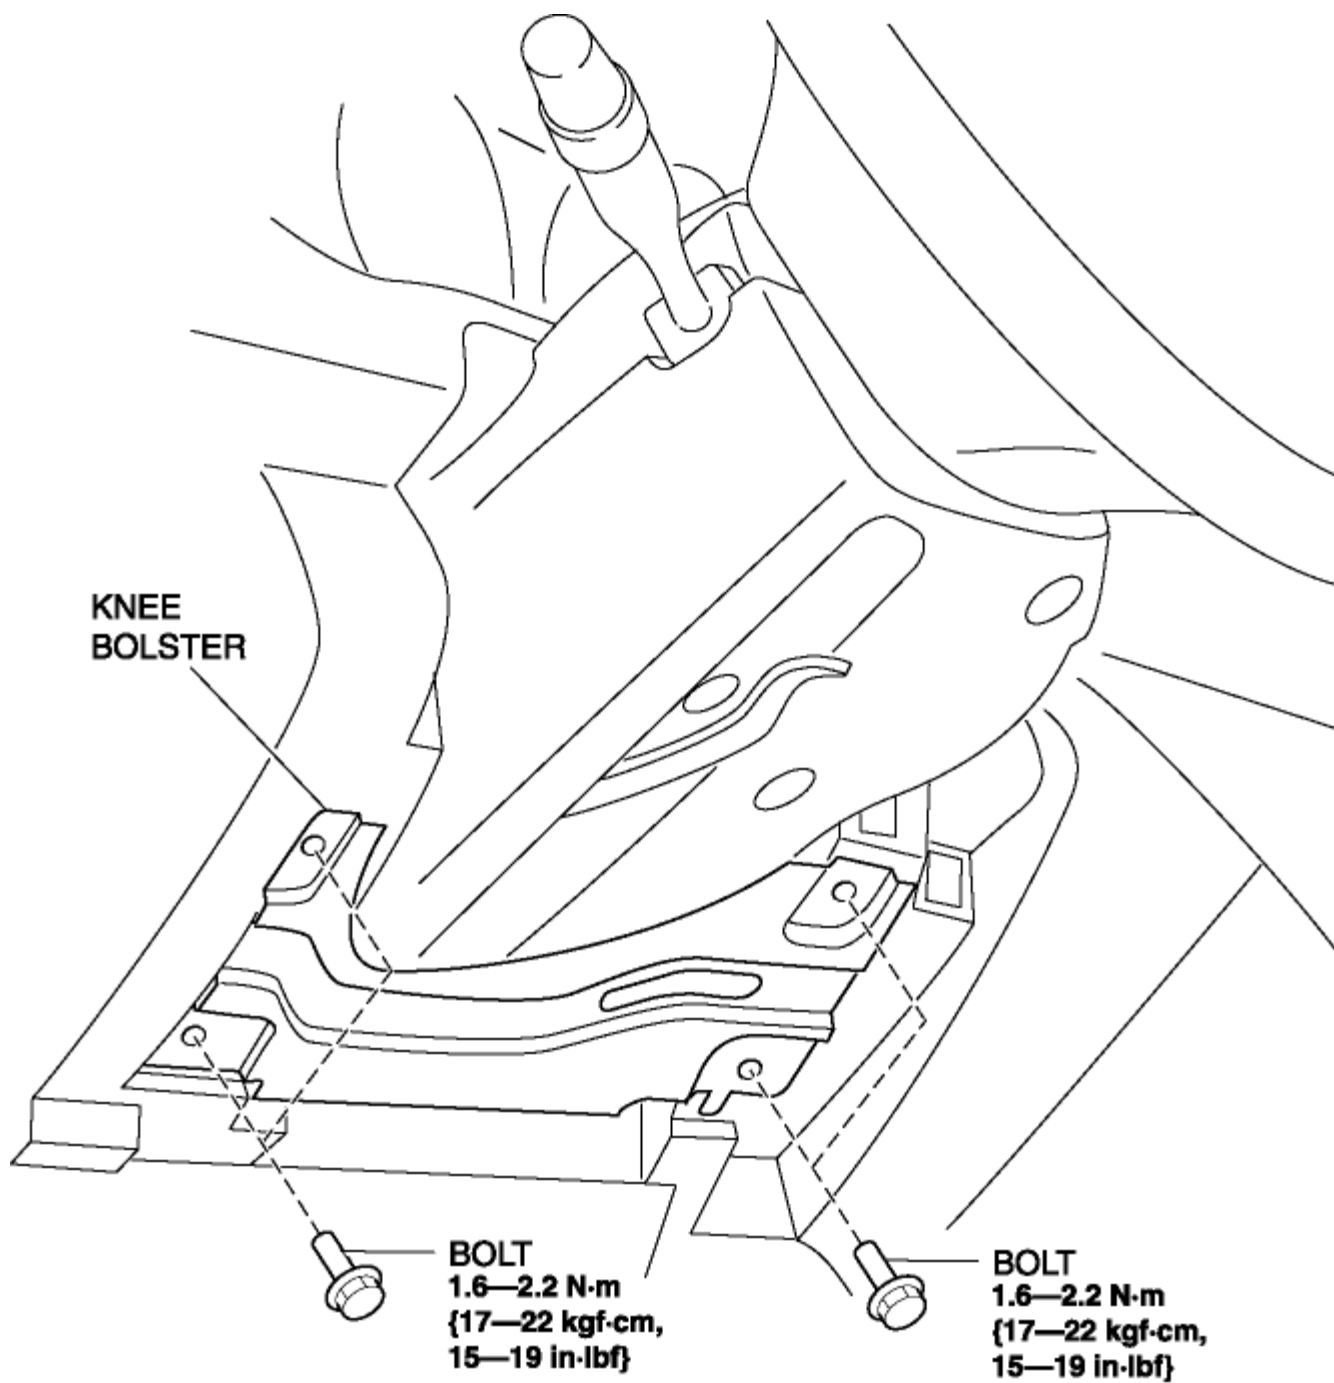

4. Remove the knee bolster.
5. Install in the reverse order of removal.


[< Previous](#) [Next >](#)

[Back to Top](#)

2012 - Mazda6 - Body and Accessories

KNEE BOLSTER REMOVAL/ INSTALLATION

1. Disconnect the negative battery cable.
2. Remove the following parts:
 - a. Driver-side front scuff plate (See [FRONT SCUFF PLATE REMOVAL/ INSTALLATION.](#))
 - b. Drive-side front side trim (See [FRONT SIDE TRIM REMOVAL/ INSTALLATION.](#))
 - c. Upper panel (See [UPPER PANEL REMOVAL/ INSTALLATION.](#))
 - d. Drive-side decoration panel (See [DECORATION PANEL REMOVAL/ INSTALLATION.](#))
 - e. Hood release lever (See [HOOD LATCH AND RELEASE LEVER REMOVAL/ INSTALLATION.](#))
 - f. Meter hood (See [METER HOOD REMOVAL/ INSTALLATION.](#))
 - g. Drive-side lower panel (See [LOWER PANEL REMOVAL/ INSTALLATION.](#))
3. Remove the bolts.

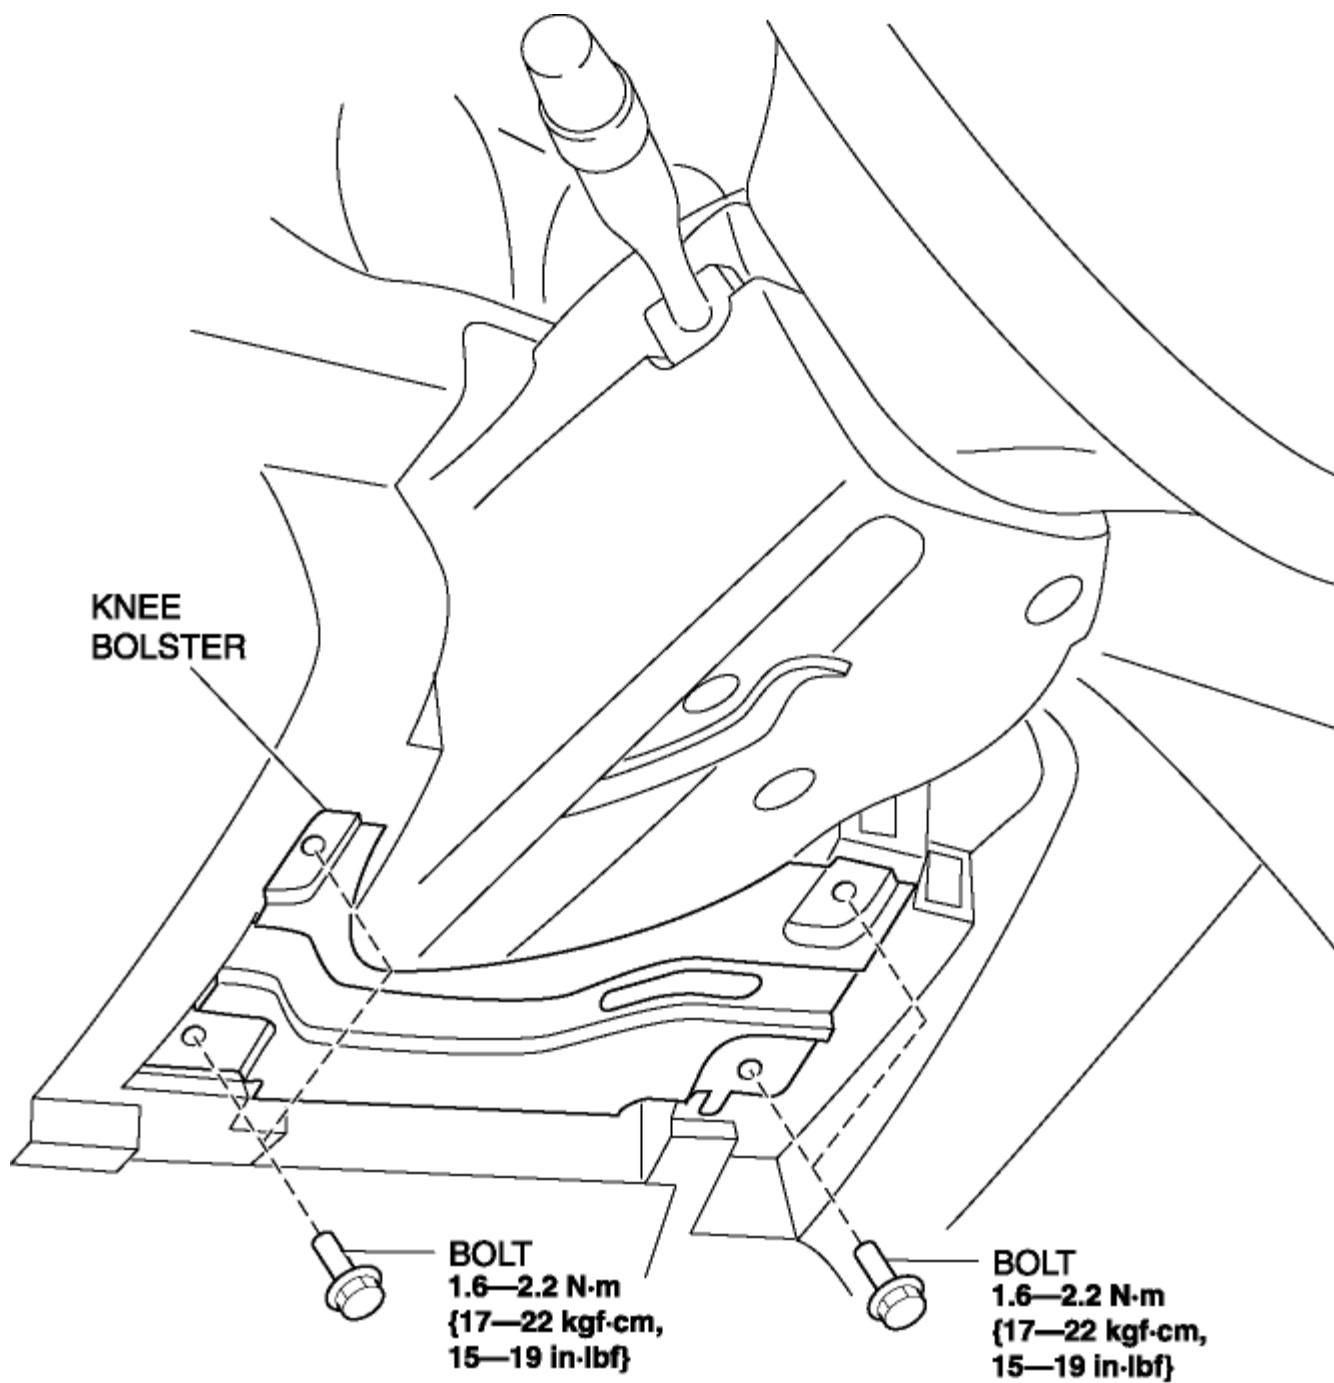

4. Remove the knee bolster.
5. Install in the reverse order of removal.

[< Previous](#) [Next >](#)

[Back to Top](#)